


**Jacuzzi®**



# Dimension and Specification Handbook

# Important Safety Instructions-All Models

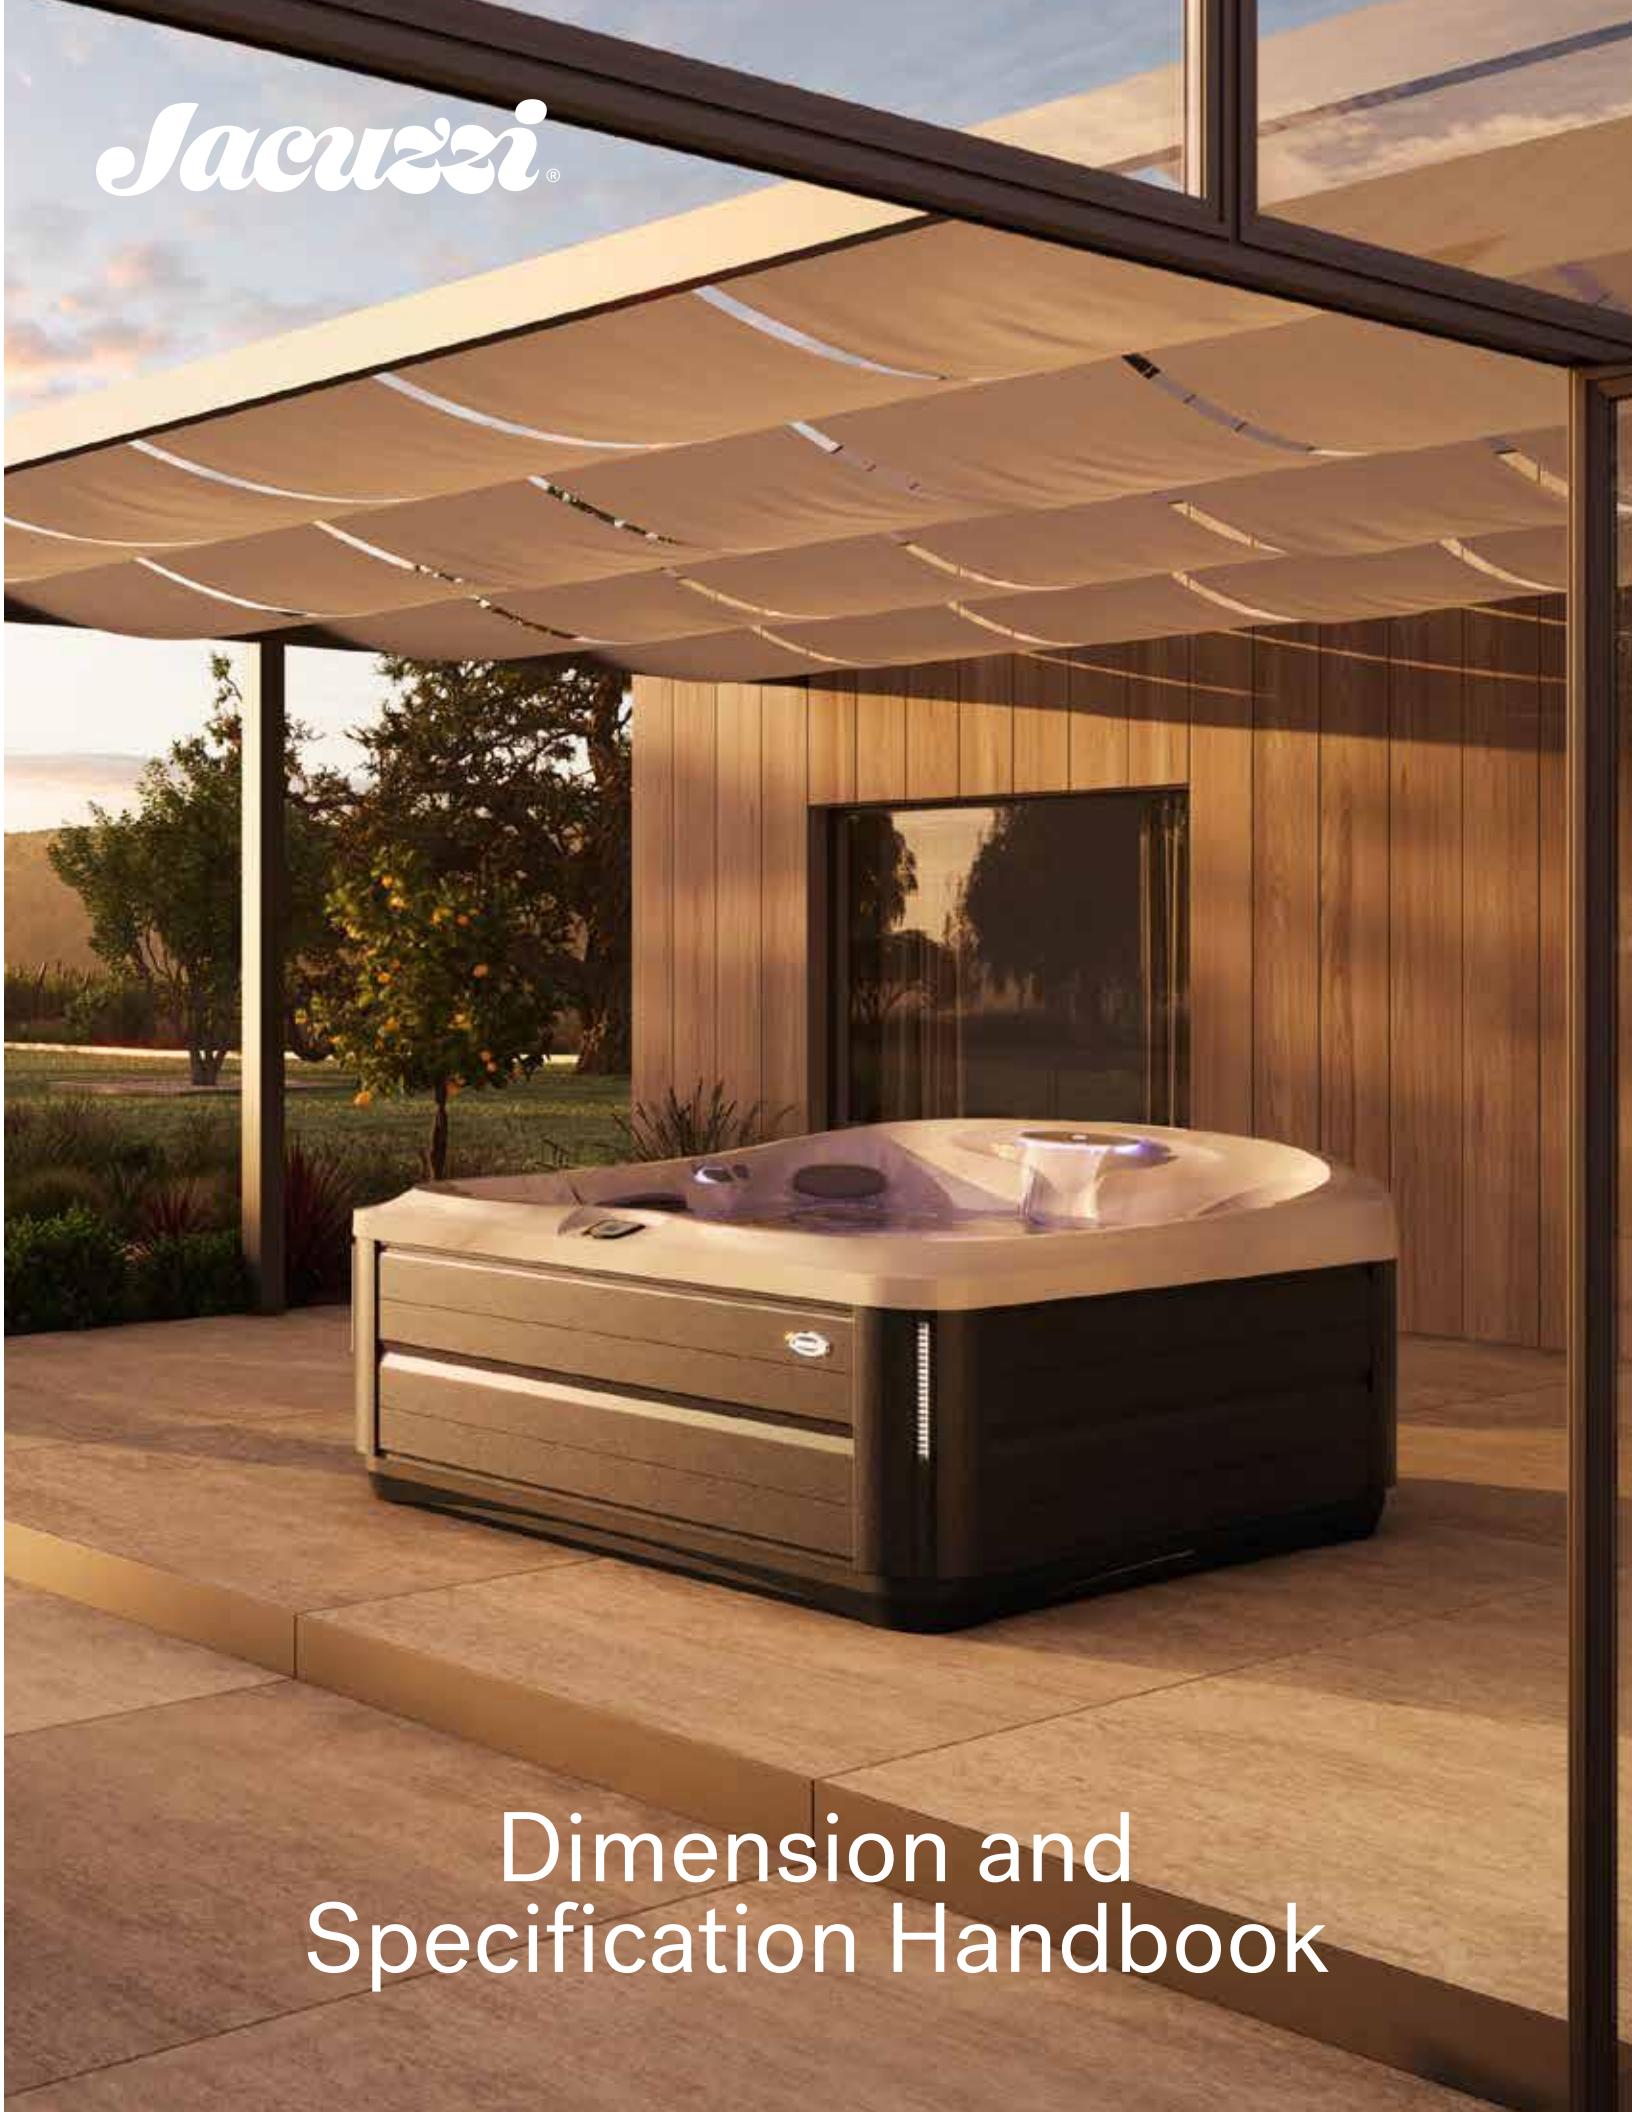

© 2024 Jacuzzi Hot Tubs. Jacuzzi may make product modifications and enhancements. Therefore, specifications may change without notice. Dimensions are approximate and for reference only.



**CAUTION: ALWAYS MEASURE EACH SPA FOR EXACT DIMENSIONS BEFORE DESIGNING ITS FOUNDATIONAL SUPPORT AND/OR DECKING.**



When designing a foundational support, always account for the following load factors:

1. Filled spa weight, plus (+)
2. Combined occupant weight at the maximum seating capacity, plus (+)
3. Weight of the support decking, when applicable.



The technical data given in this publication is for reference only. It implies no warranty of kind.



Dimensions/Specifications subject to change without notice. Spa operation subject to change without notice.

# Table of Contents

<b>Jacuzzi J-400™ Collection Hot Tubs .....</b>	<b>7</b>
<b>J-495™ Specifications .....</b>	<b>7</b>
<b>J-495 Operations .....</b>	<b>8</b>
<b>J-495 Dimensions.....</b>	<b>9</b>
<b>J-485™ Specifications .....</b>	<b>10</b>
<b>J-485 Operations .....</b>	<b>11</b>
<b>J-485 dimensions .....</b>	<b>12</b>
<b>J-475™ Specifications .....</b>	<b>13</b>
<b>J-475 Operations .....</b>	<b>14</b>
<b>J-475 Dimensions.....</b>	<b>15</b>
<b>J-445™ Specifications .....</b>	<b>16</b>
<b>J-445 Operations .....</b>	<b>17</b>
<b>J-445 Dimensions.....</b>	<b>18</b>
<b>J-435™ Specifications .....</b>	<b>19</b>
<b>J-435 Operations .....</b>	<b>20</b>
<b>J-435 Dimensions.....</b>	<b>21</b>
<b>Jacuzzi J-LX® Collection Hot Tubs .....</b>	<b>22</b>
<b>J-LXL® Specifications .....</b>	<b>22</b>
<b>J-LXL Operations .....</b>	<b>23</b>
<b>J-LXL Dimensions.....</b>	<b>24</b>
<b>J-LX® Specifications.....</b>	<b>25</b>
<b>J-LX Operations.....</b>	<b>26</b>
<b>J-LX Dimensions.....</b>	<b>27</b>
<b>Jacuzzi J-300™ Collection Hot Tubs .....</b>	<b>28</b>
<b>J-385™ Specifications .....</b>	<b>28</b>
<b>J-385 Operations .....</b>	<b>29</b>
<b>J-385 Dimensions.....</b>	<b>30</b>
<b>J-375™ Specifications .....</b>	<b>31</b>
<b>J-375 Operations .....</b>	<b>32</b>
<b>J-375 Dimensions.....</b>	<b>33</b>

# Table of Contents

<b>J-365™ Specifications .....</b>	<b>34</b>
<b>J-365 Operations .....</b>	<b>35</b>
<b>J-365 Dimensions.....</b>	<b>36</b>
<b>J-355™ Specifications .....</b>	<b>37</b>
<b>J-355 Operations .....</b>	<b>38</b>
<b>J-355 Dimensions.....</b>	<b>39</b>
<b>J-345™ Specifications .....</b>	<b>40</b>
<b>J-345 Operations .....</b>	<b>41</b>
<b>J-345 Dimensions.....</b>	<b>42</b>
<b>J-335™ Specifications .....</b>	<b>43</b>
<b>J-335 Operations .....</b>	<b>44</b>
<b>J-335 Dimensions.....</b>	<b>45</b>
<b>J-325™ Specifications .....</b>	<b>46</b>
<b>J-325 Operations .....</b>	<b>47</b>
<b>J-325 Dimensions.....</b>	<b>48</b>
<b>J-315™ Specifications .....</b>	<b>49</b>
<b>J-315 Operations .....</b>	<b>50</b>
<b>J-315 Dimensions.....</b>	<b>51</b>
<b>Jacuzzi J-200™ Collection Hot Tubs .....</b>	<b>52</b>
<b>J-285™ Specifications .....</b>	<b>52</b>
<b>J-285 Operations .....</b>	<b>53</b>
<b>J-285 Dimensions.....</b>	<b>54</b>
<b>J-275™ Specifications .....</b>	<b>55</b>
<b>J-275 Operations .....</b>	<b>56</b>
<b>J-275 Dimensions.....</b>	<b>57</b>
<b>J-245™ Specifications .....</b>	<b>58</b>
<b>J-245 Operations .....</b>	<b>59</b>
<b>J-245 Dimensions.....</b>	<b>60</b>

# Table of Contents


<b>J-235™ Specifications .....</b>	<b>61</b>
<b>J-235 Operations .....</b>	<b>62</b>
<b>J-235 Dimensions.....</b>	<b>63</b>
<b>J-225™ Specifications .....</b>	<b>64</b>
<b>J-225 Operations .....</b>	<b>65</b>
<b>J-225 Dimensions.....</b>	<b>66</b>
<b>J-215™ Specifications .....</b>	<b>67</b>
<b>J-215 Operations .....</b>	<b>68</b>
<b>J-215 Dimensions.....</b>	<b>69</b>
<b>Play™ Collection .....</b>	<b>70</b>
<b>Soul™ 30 Jets Square Lounge Specifications .....</b>	<b>70</b>
<b>Soul 30 Jets Square Lounge Operation/Seat Depths .....</b>	<b>71</b>
<b>Soul 30 Jets Square Lounge Portable Dimensions .....</b>	<b>72</b>
<b>Echo™ 30 Jets Square Specifications .....</b>	<b>73</b>
<b>Echo 30 Jets Square Operation/Seat Depths .....</b>	<b>74</b>
<b>Echo 30 Jets Square Portable Dimensions .....</b>	<b>75</b>
<b>Mood™ 20 Jets Rectangle Specifications.....</b>	<b>76</b>
<b>Mood 20 Jets Rectangle Operation/Seat Depths.....</b>	<b>77</b>
<b>Mood 20 Jets Rectangle Portable Dimensions.....</b>	<b>78</b>
<b>Complete Dimensions -J 400™ Collection Models .....</b>	<b>79</b>
<b>Complete Dimensions - JLX™ Collection Models.....</b>	<b>80</b>
<b>Complete Dimensions - J300™ Collection Models .....</b>	<b>81</b>
<b>Complete Dimensions - J200™ Collection Models .....</b>	<b>82</b>



# Jacuzzi J-495


## Specifications

<b>Seating Capacity</b>	8-9 Adults
<b>Dimensions</b>	91" x 110" x 37.5" Front/43.5" Back, (231.1 cm x 279.4 cm x 95.25 cm Front/110.5 cm Back); <b>For complete dimensions, See page 79</b>
<b>Dry Weight</b>	1,091 lbs (495 kg)
<b>Filled Weight (Spa Volume)</b>	6,679 lbs (3,030 kg)
<b>Filled Weight (Average Fill)</b>	5,261 lbs (2,386 kg)
<b>Water Capacity (Spa Volume)</b>	670 US gallons (2,536 Liters)
<b>Water Capacity (Average Fill)</b>	500 US gallons (1,893 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 3</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	69 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	2 PowerPro® NX2, 2 PowerPro® FX, 5 PowerPro® RX
<b>Seat B Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat C Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® FX Directional, 2 PowerPro® PX, 4 PowerPro® FX
<b>Seat D Jets</b>	2 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® PX, 2 PowerPro® FX Directional
<b>Seat F Jets</b>	4 PowerPro® FX, 4 PowerPro® RX
<b>Seat G Jet</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Footwell (H)</b>	14 PowerPro® FX Small
<b>Massage Selectors</b>	2
<b>Air Controls</b>	5
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; Factory installed True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Midnight, Monaco, Porcelain (while quantities last)
<b>Headrests</b>	4
<b>Waterfalls</b>	Two with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@50A or 60A <b>Export (50 Hz): 220-240 VAC@ 1x32A, 1x40A, 1x32A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True Water System)
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer

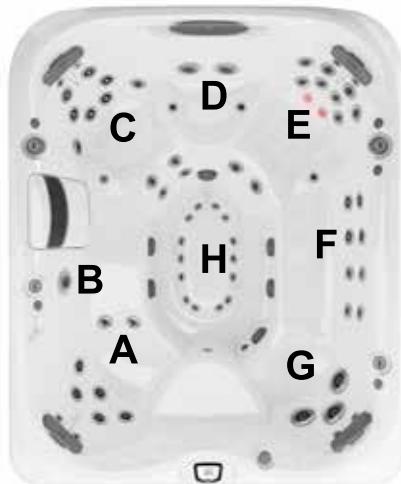


# Jacuzzi J-495

## Operation/Seat Depths

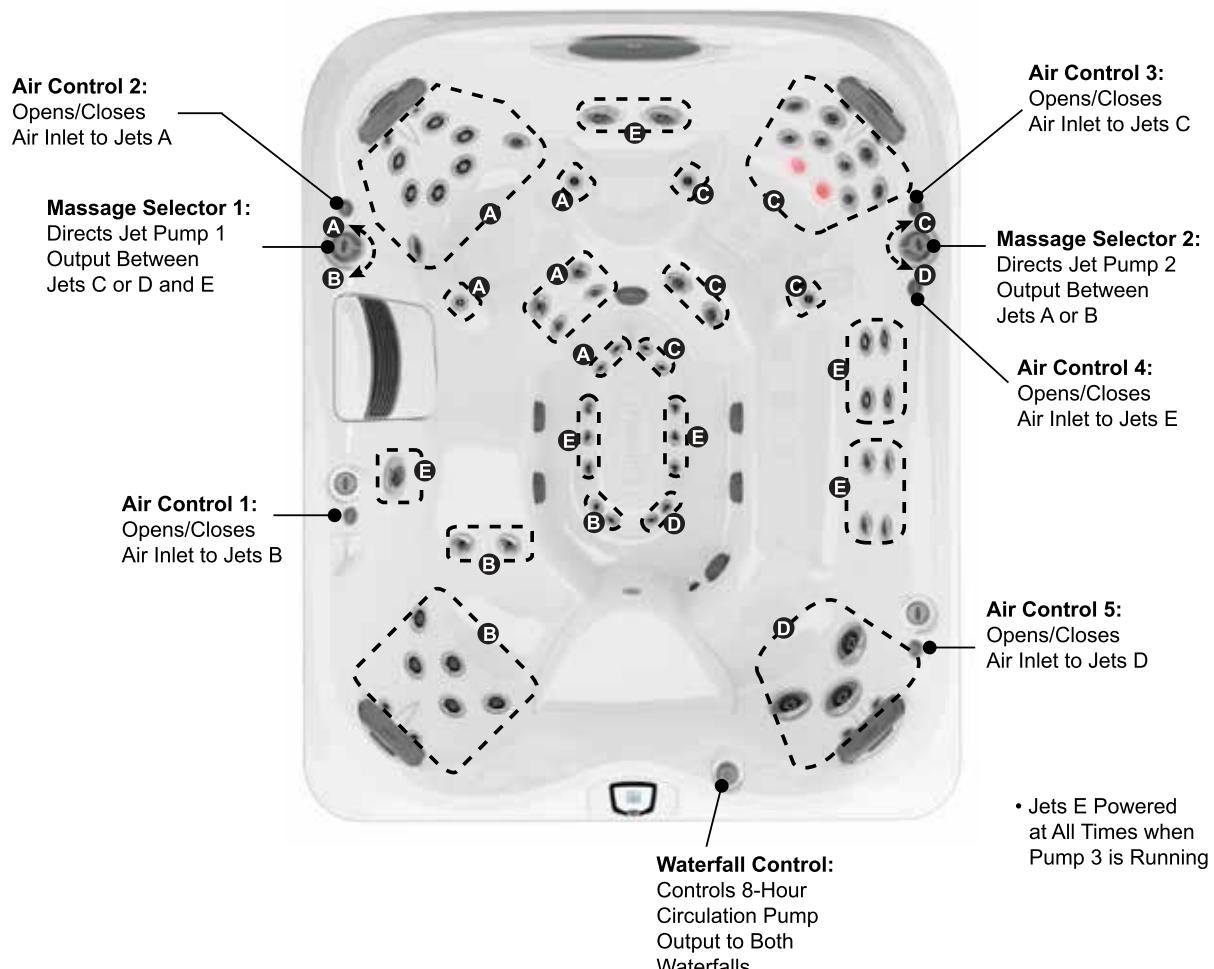

**69 Total Jets (plus 2 IR Therapy Lights)**

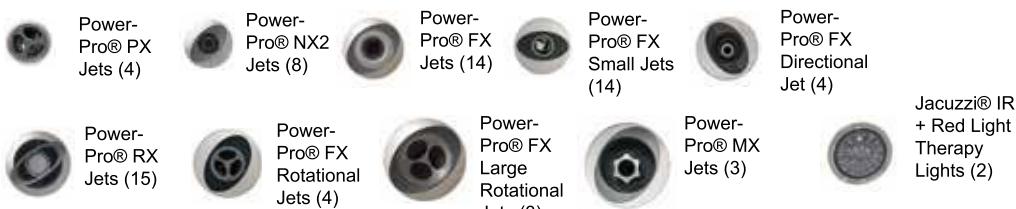


Spa Operation Subject to Change without Notice

## Seat Depths


**A = 27.75" (70.49 cm)**  
**B = 18.75" (47.63 cm)**  
**C = 29.00" (73.66 cm)**  
**D = 19.00" (73.03 cm)**  
**E = 27.00" (68.58 cm)**  
**F = 23.00" (58.42 cm)**

**G = 25.50" (64.77 cm)**  
**H = 17.75" (45.09 cm)**  
**I = 30.75" (78.11 cm)**  
**J = 33.00" (83.82 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

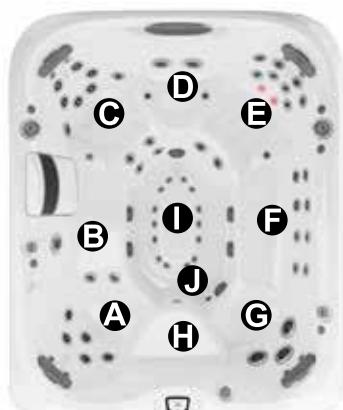

# Jacuzzi J-495


## Dimensions

**TOP VIEW**

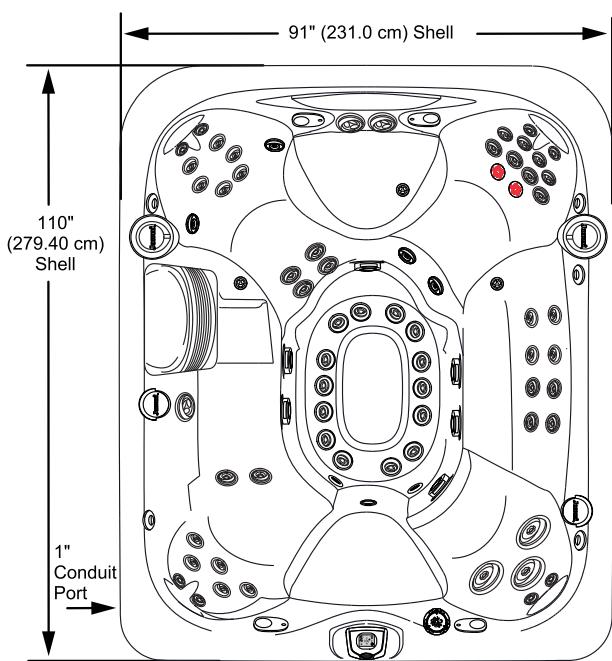


**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

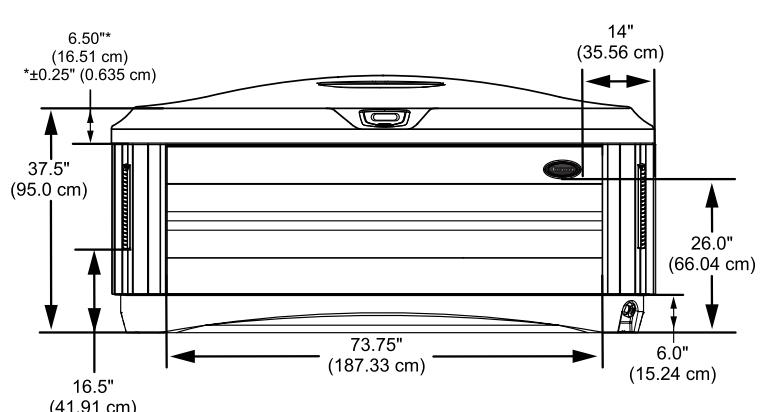


**RIGHT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

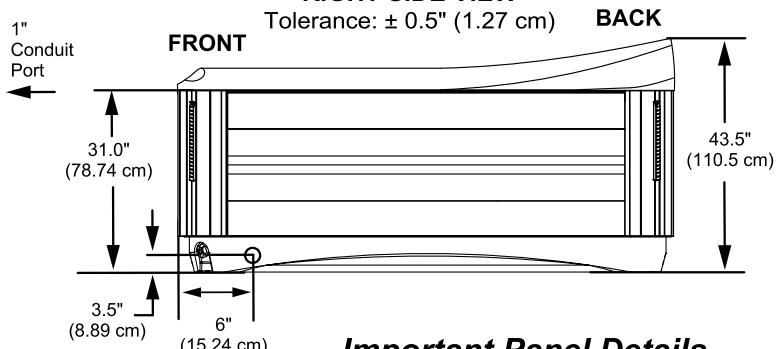

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

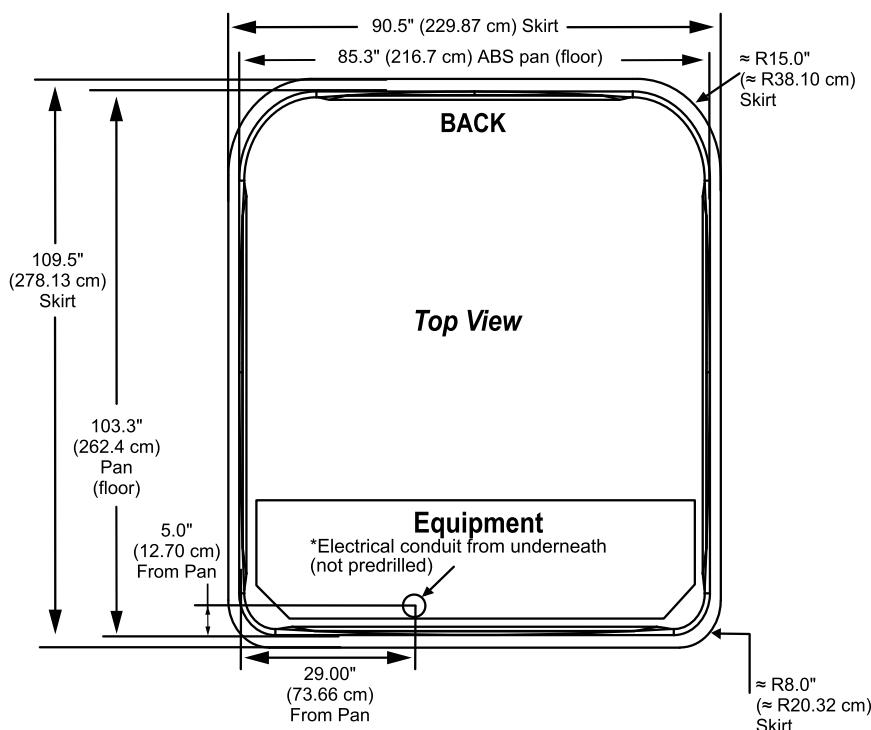

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-485


## Specifications

<b>Seating Capacity</b>	6-7 Adults
<b>Dimensions</b>	91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); <b>For complete dimensions, See page 79</b>
<b>Dry Weight</b>	916 lbs (415 kg)
<b>Filled Weight (Average Fill)</b>	4,544 lbs (2,061 kg)
<b>Water Capacity (Average Fill)</b>	435 US gallons (1,647 Liters)
<b>Filled Weight (Spa Volume)</b>	5,336 lbs (2,421 kg)
<b>Water Capacity (Spa Volume)</b>	530 US gallons (2,006 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	47 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX
<b>Seat C Jets</b>	2 PowerPro® FX Large
<b>Seat D Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® PX
<b>Seat E Jets</b>	2 PowerPro® RX, 2 PowerPro® FX
<b>Seat F Jets</b>	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4, On/Off rocker switch air controller
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Midnight, Monaco, Porcelain (while quantities last)
<b>Headrests</b>	4
<b>Waterfall</b>	One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer




# Jacuzzi J-485

## Operation/Seat Depths

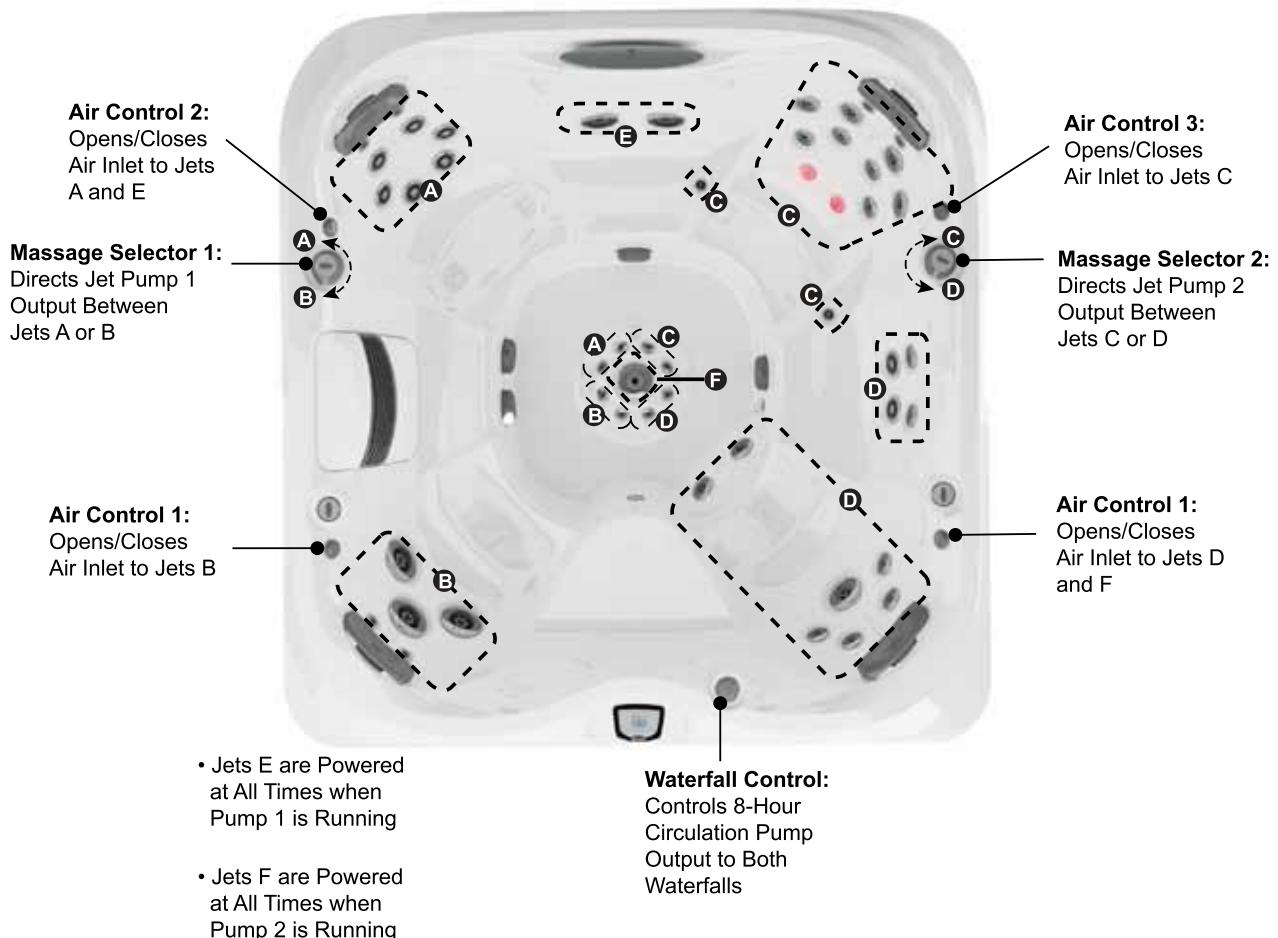

**47 Total Jets (plus 2 IR Therapy Lights)**

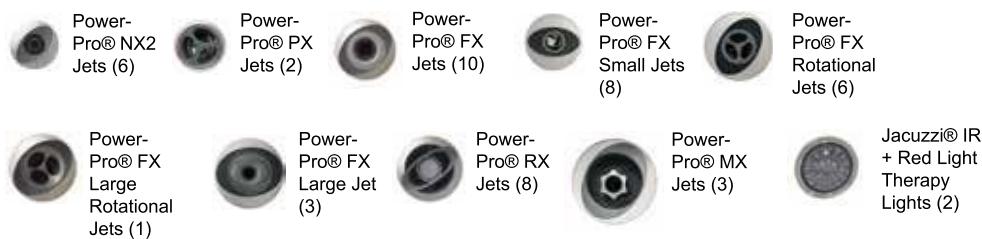


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.25" (64.14 cm)**  
**B = 23.00" (58.42 cm)**  
**C = 29.50" (74.93 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 29.25" (74.30 cm)**  
**F = 21.00" (53.34 cm)**

**G = 27.38" (69.55 cm)**  
**H = 17.25" (43.82 cm)**  
**I = 32.50" (82.55 cm)**



Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-485


## Dimensions

**TOP VIEW**

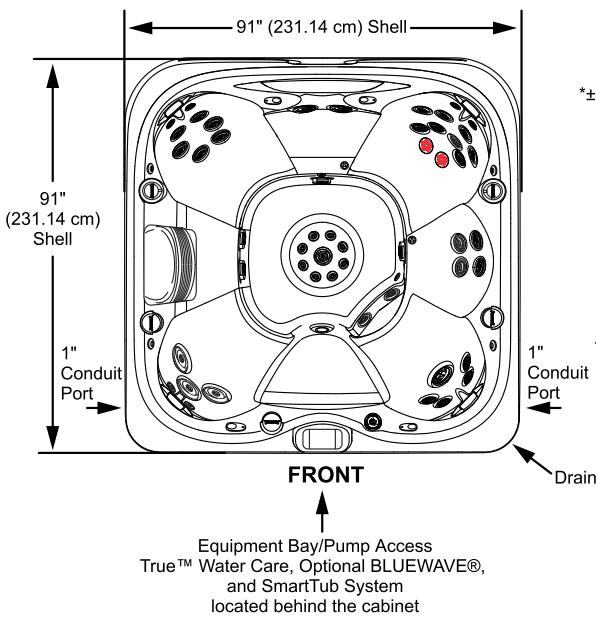

**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

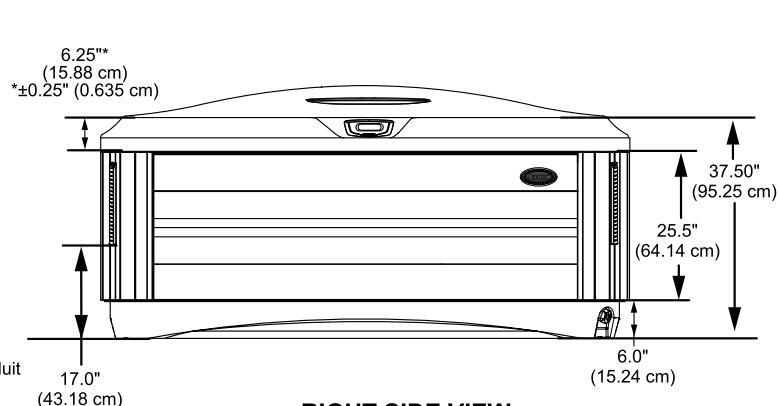


**RIGHT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

**FRONT**

**BACK**

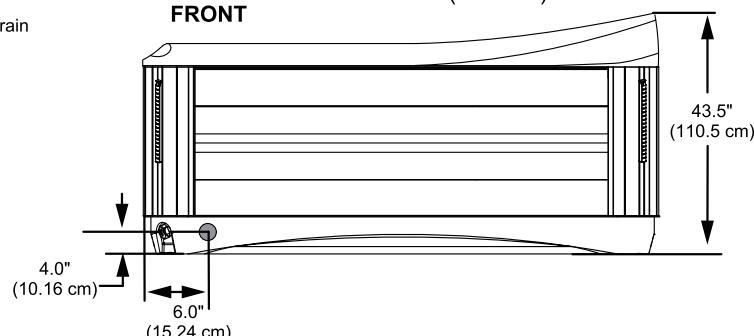


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**\*IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

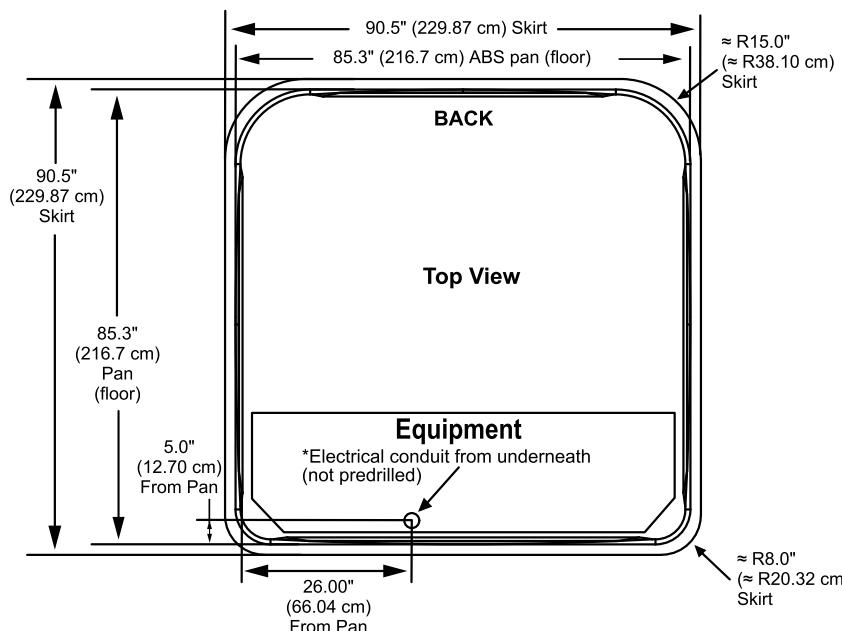

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-475

## Specifications

<b>Seating Capacity</b>	..... 6-7 Adults
<b>Dimensions</b>	..... 91" x 91" x 37.5" Front/43.5" Back, (231.14 cm x 231.14 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 79</b>
<b>Dry Weight</b>	..... 925 lbs (419.5 kg)
<b>Filled Weight (Average Fill)</b>	..... 4,595 lbs (2,084 kg)
<b>Water Capacity (Average Fill)</b>	..... 440 US gallons (1,666 Liters)
<b>Filled Weight (Spa Volume)</b>	..... 5,387 lbs (2,444 kg)
<b>Water Capacity (Spa Volume)</b>	..... 535 US gallons (2,025 Liters)
<b>Electronic Controls</b>	..... ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtra- tion cycles, heating modes and water temperature setting.
<b>Pump 1</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	..... North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	..... Yes, 8-Hour
<b>Total PowerPro® Jets</b>	..... 53 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	..... 2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Seat B Jets</b>	..... 2 PowerPro® NX2, 6 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
<b>Seat C Jets</b>	..... 2 PowerPro® FX Large
<b>Seat D Jets</b>	..... 2 PowerPro® NX2, 6 PowerPro® RX, 8 PowerPro® PX, 2 PowerPro® FX Large
<b>Seat E Jet</b>	..... 4 PowerPro® FX, 1 PowerPro® FX Large Rotational
<b>Footwell (F)</b>	..... 8 PowerPro® FX Small, 1 PowerPro® FX Large
<b>Massage Selectors</b>	..... 2
<b>Air Controls</b>	..... 4, On/Off rocker switch air controller
<b>Water Management System</b>	..... One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	..... <b>ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	..... Waterfall light, massage selectors, cupholders, underwater, indicator light, and exterior lights (standard)
<b>ProFinish™ Cabinet Colors</b>	..... Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	..... 4
<b>Waterfall</b>	..... One with independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Heater:</b>	..... North America (60 Hz): 5.5 kW, High Flow
<b>Export (50 Hz):</b>	..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	..... North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	..... SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	..... BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm head- phone jack port; 4 premium speakers, a powered subwoofer


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice




# Jacuzzi J-475

## Operation/Seat Depths

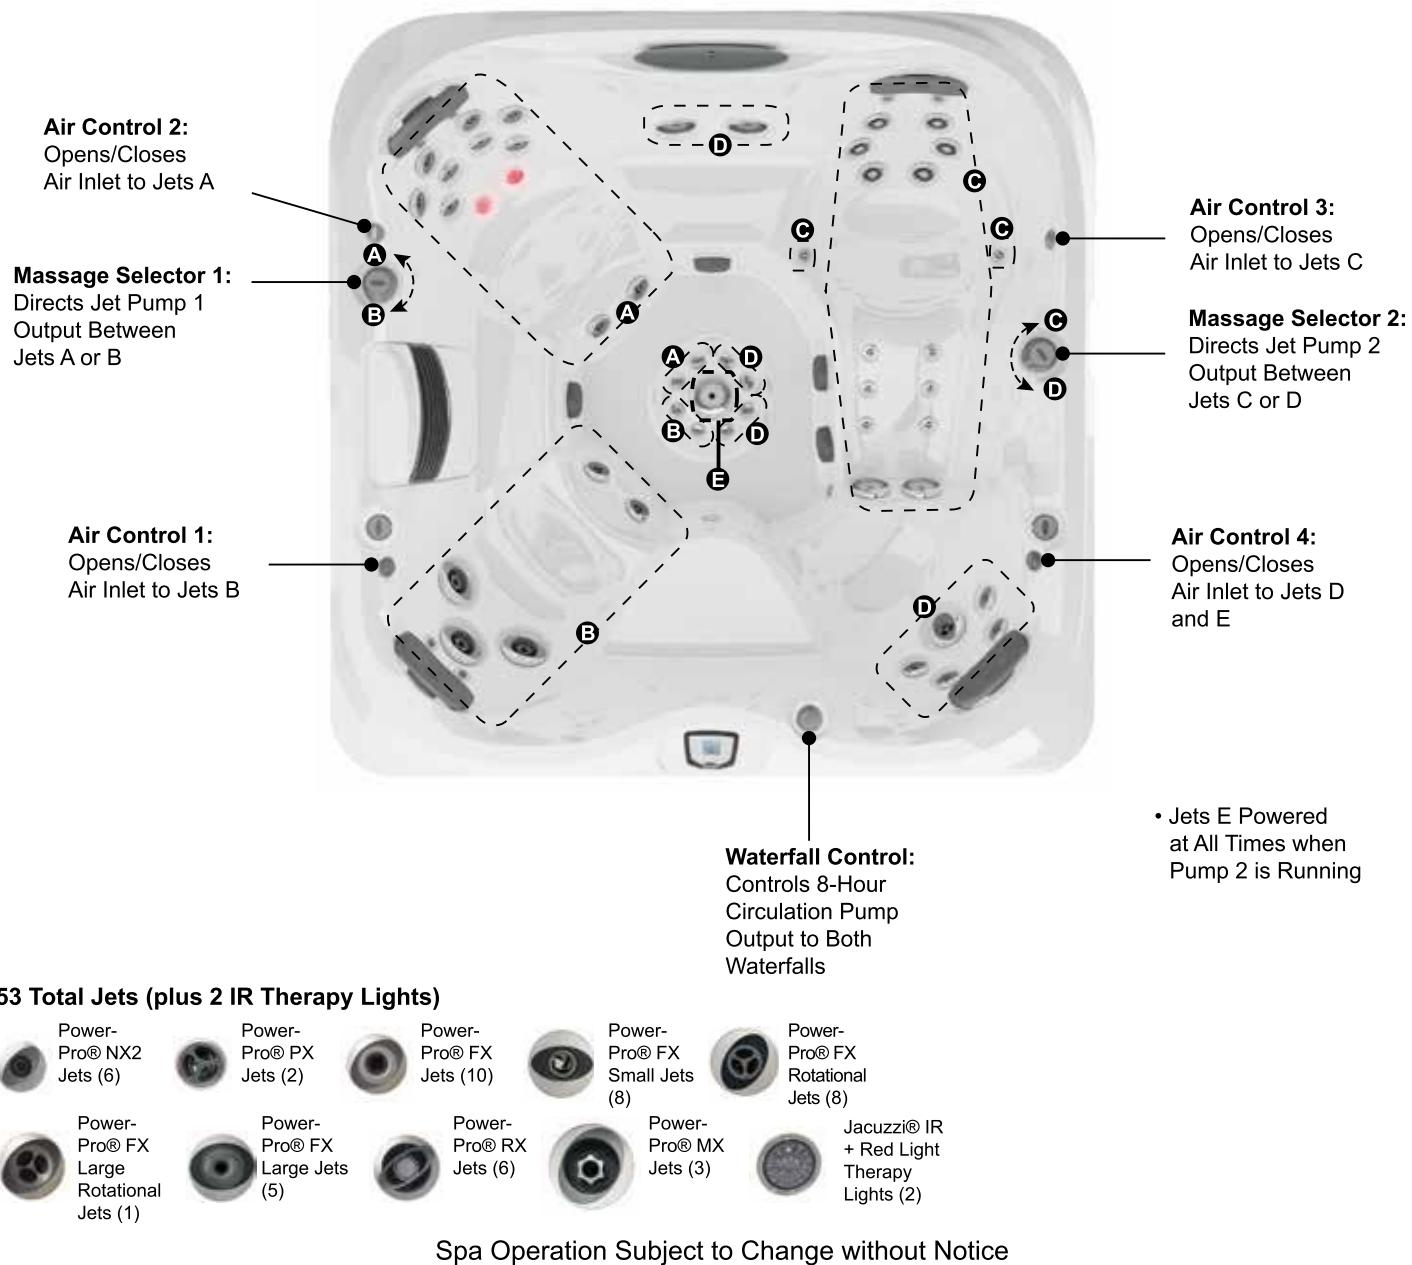

**A = 25.25" (64.14 cm)**  
**B = 23.00" (58.42 cm)**  
**C = 29.50" (74.93 cm)**  
**D = 23.25" (59.06 cm)**  
**E = 29.25" (74.30 cm)**  
**F = 25.25" (64.14 cm)**

**G = 17.25" (43.82 cm)**  
**H = 32.50" (82.55 cm)**  
**I = 19.75" (50.17 cm)**  
**J = 28.50" (72.39 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat.  
**Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-475

## Dimensions

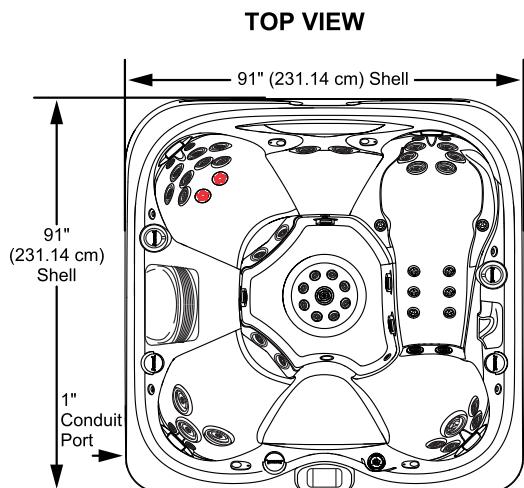

FRONT


Equipment Bay/Pump Access  
True™ Water Care System,  
Optional BLUEWAVE®,  
and SmartTub System  
located behind the cabinet

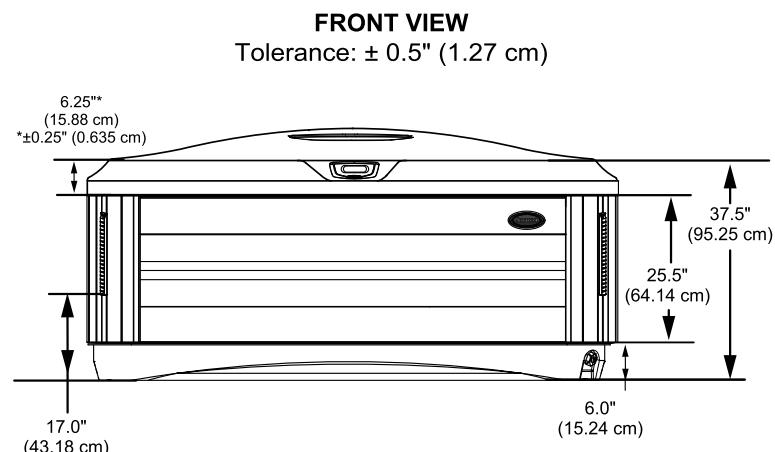

FRONT

RIGHT SIDE VIEW  
Tolerance:  $\pm 0.5"$  (1.27 cm)

BACK

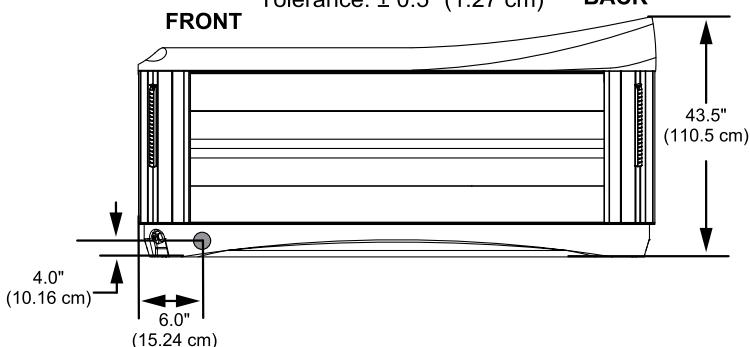


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**\*IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

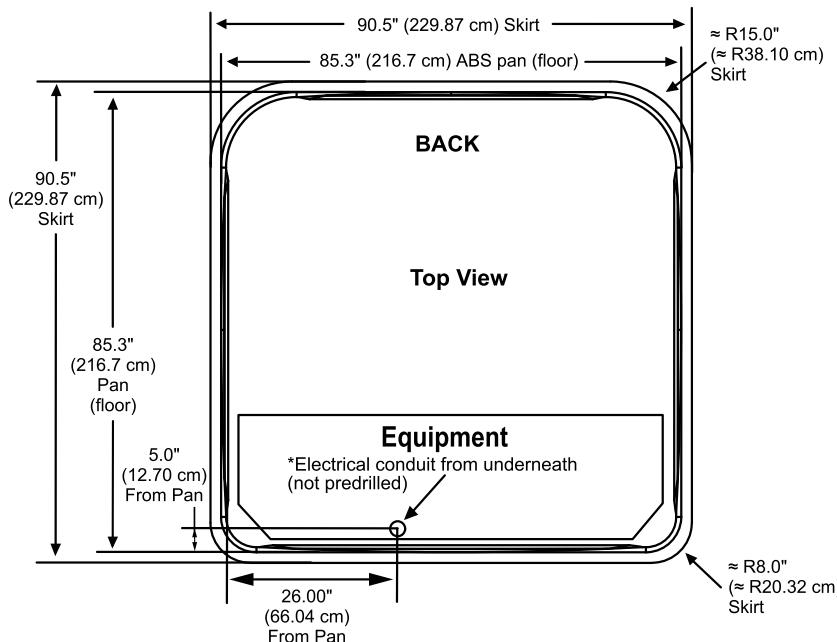

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-445


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 79</b>
<b>Dry Weight</b>	855 lbs (388 kg)
<b>Filled Weight (Average Fill)</b>	4,024 lbs (1,825 kg)
<b>Water Capacity (Average Fill)</b>	380 US gallons (1,438 Liters)
<b>Filled Weight (Spa Volume)</b>	4,525 lbs (2,052 kg)
<b>Water Capacity (Spa Volume)</b>	440 US gallons (1,666 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame Export (50 Hz): <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	43 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	2 PowerPro® RX
<b>Seat C Jets</b>	2 PowerPro® FX, 6 PowerPro® RX, 2 PowerPro® FX Rotational
<b>Seat D Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
<b>Seat F Jets</b>	4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	8 PowerPro® FX Small
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4, On/Off rocker switch air controller
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	<b>ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	One waterfall with light, one underwater light, cupholders, massage selector lights, indicator light, and exterior lights (standard)
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	4
<b>Waterfall</b>	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow
<b>Export (50 Hz):</b>	<b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, or 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Clean Water System, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer



# Jacuzzi J-445

## Operation/Seat Depths

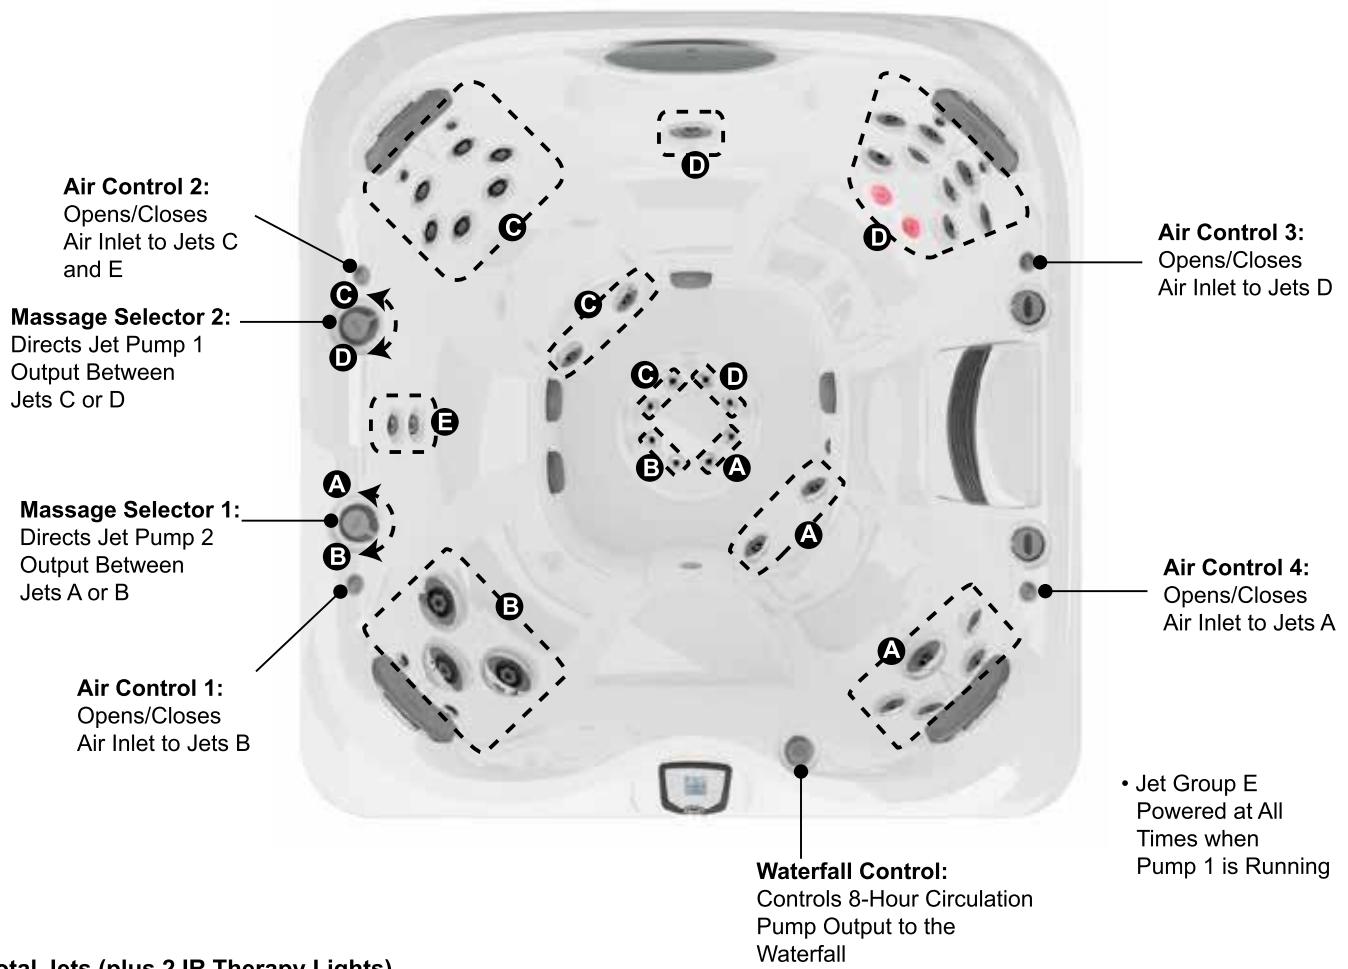

**43 Total Jets (plus 2 IR Therapy Lights)**




Spa Operation Subject to Change without Notice


## Seat Depths

**A = 25.50" (64.77 cm)**  
**B = 21.00" (53.34 cm)**  
**C = 30.00" (76.20 cm)**  
**D = 23.00" (58.42 cm)**  
**E = 29.00" (73.66 cm)**  
**F = 23.00" (58.42 cm)**

**G = 25.50" (64.77 cm)**  
**H = 18.00" (45.72 cm)**  
**I = 34.00" (86.36 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).

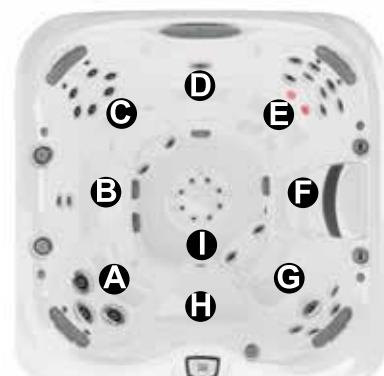

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-445

## Dimensions

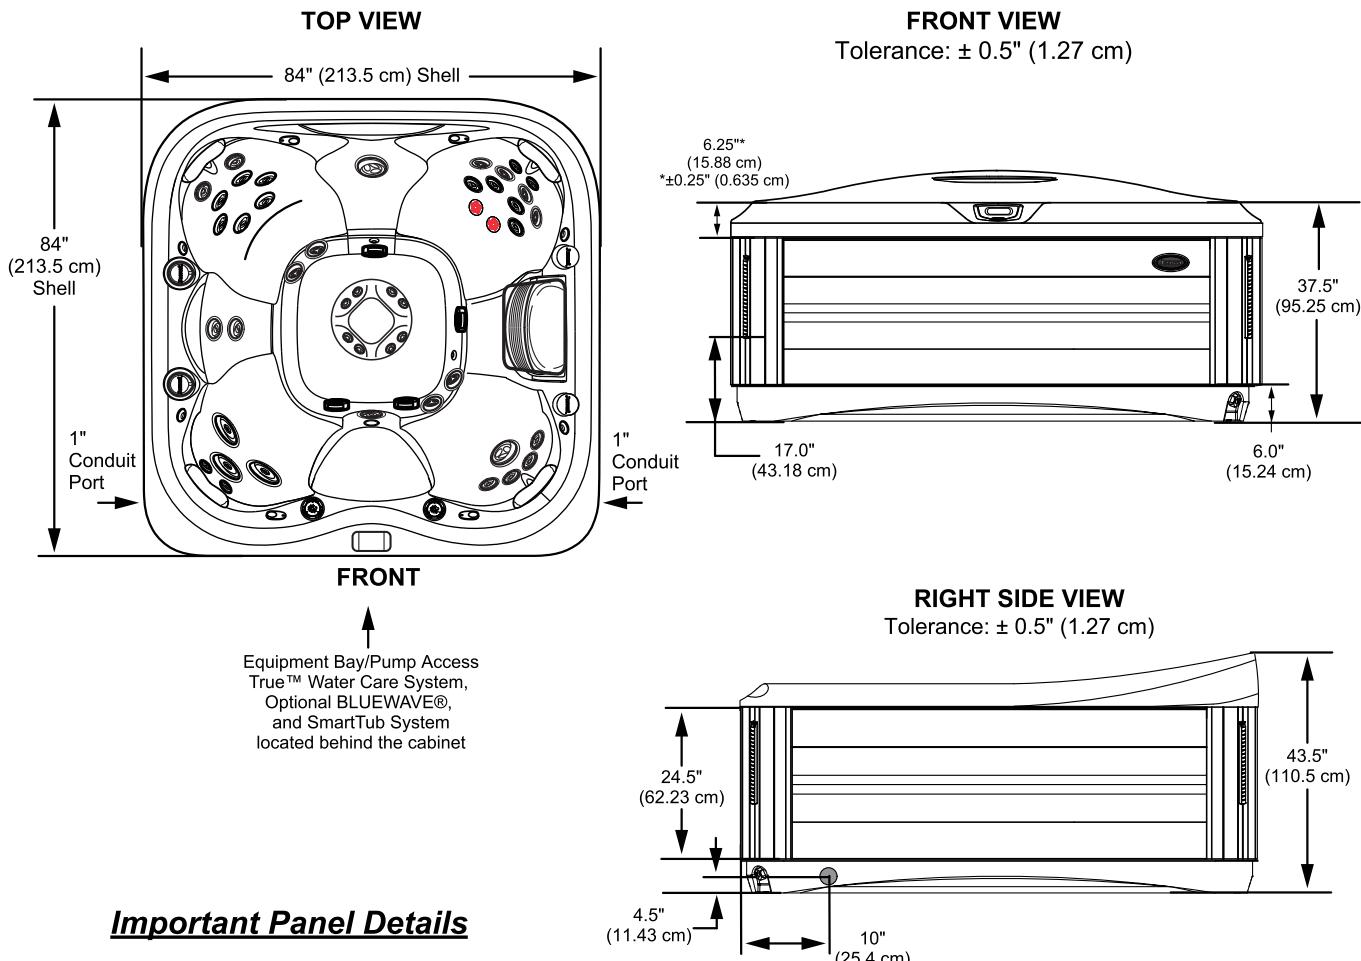


### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



**\*IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

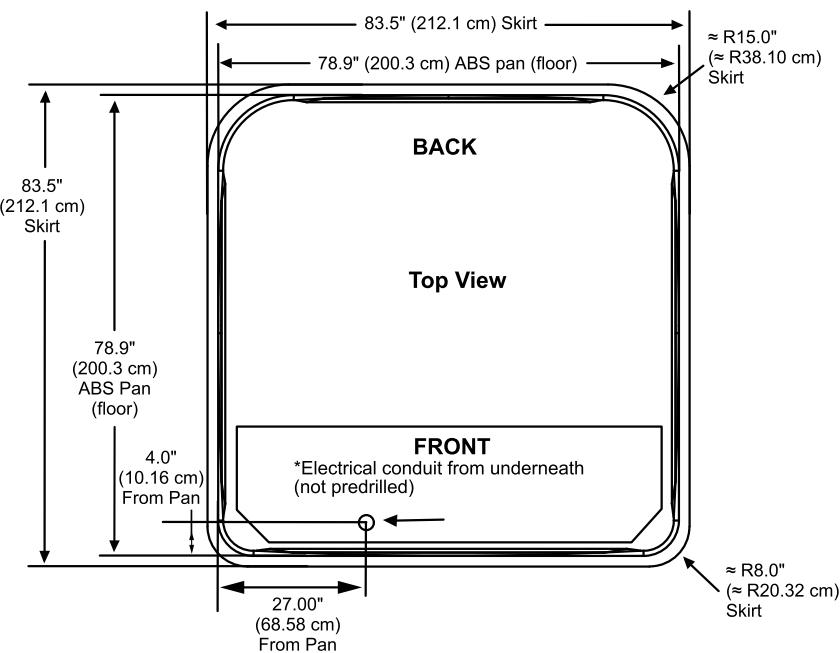

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-435

## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	84" x 84" x 37.5" Front/43.5" Back, (213.5 cm x 213.5 cm x 95.25 cm Front/110.5 cm Back); <b>For Complete Dimensions, See page 79</b>
<b>Dry Weight</b> .....822 lbs (373 kg)	
<b>Filled Weight (Average Fill)</b>	3,824 lbs (1,735 kg)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Filled Weight (Spa Volume)</b>	4,492 lbs (2,037 kg)
<b>Water Capacity (Spa Volume)</b>	440 US gallons (1,666 Liters)
<b>Electronic Controls</b>	ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 5.1 HP break, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-Hour
<b>Total PowerPro® Jets</b>	45 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	3 PowerPro® FX
<b>Seat B Jets</b>	2 PowerPro® NX2, 6 PowerPro® RX, 2 PowerPro® PX, 6 PowerPro® FX Small, 2 PowerPro® FX Rotational
<b>Seat C Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat D Jets</b>	2 PowerPro® NX2, 4 PowerPro® FX Rotational, 4 PowerPro® FX, 2 IR Therapy Lights
<b>Seat E Jets</b>	2 PowerPro® RX
<b>Seat F Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX Rotational
<b>Footwell (G)</b>	4 PowerPro® FX Small
<b>Massage Selectors</b>	2
<b>Air Controls</b>	3, On/Off rocker switch air controller
<b>Water Management System</b>	One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	<b>ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	One waterfall with light, one underwater light, cupholder, massage selector lights, indicator light, and exterior lights (standard)
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	3
<b>Waterfall</b>	One with Independent flow rate (on or off) adjustment; powered by 8-hour circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow
<b>Export (50 Hz):</b>	<b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@ 1x32A, 1x20A/1x16A, or 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System with Bluetooth capability and Aux 3.5 mm headphone jack port; 4 premium speakers, a powered subwoofer


\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice



# Jacuzzi J-435

## Operation/Seat Depths

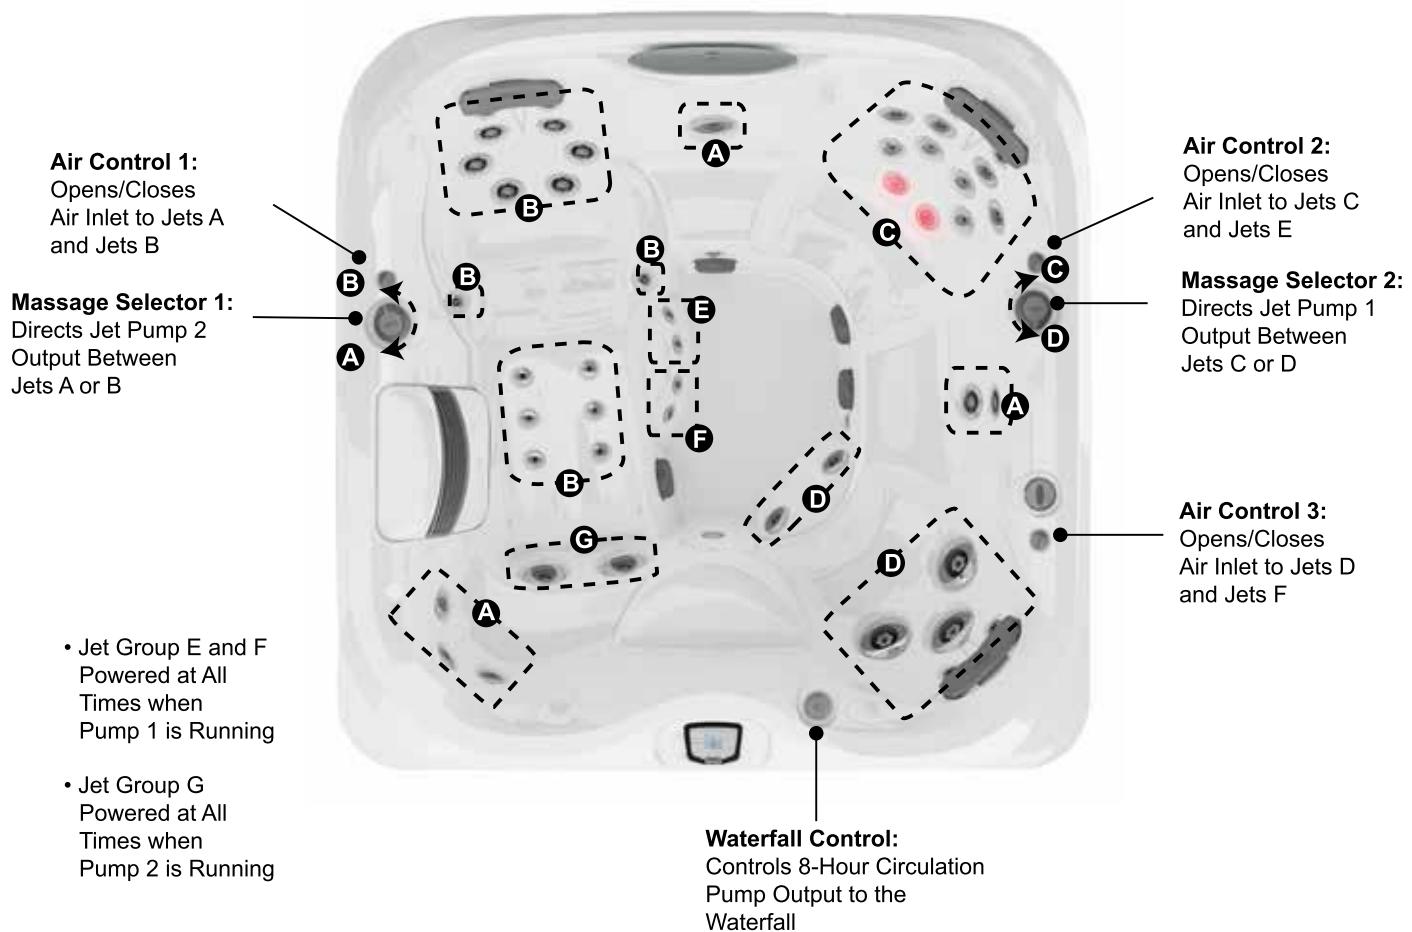

### 45 Total Jets (plus 2 IR Therapy Lights)




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 17.75" (45.09 cm)**  
**B = 27.75" (70.49 cm)**  
**C = 29.00" (73.66 cm)**  
**D = 23.00" (58.42 cm)**  
**E = 30.00" (76.20 cm)**  
**F = 23.50" (59.69 cm)**

**G = 25.50" (64.77 cm)**  
**H = 33.50" (85.09 cm)**  
**I = 20.50" (52.07 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5"** (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-435

## Dimensions

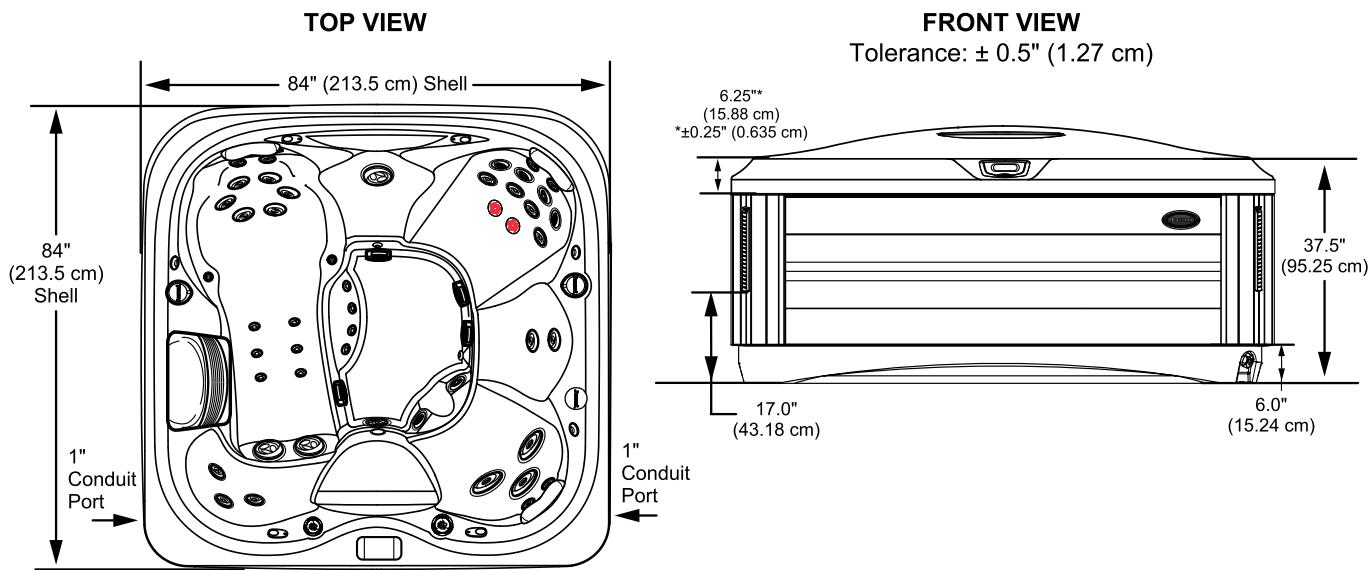


**FRONT**


Equipment Bay/Pump Access  
True™ Water Care System,  
Optional BLUEWAVE®,  
and SmartTub System  
located behind the cabinet

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

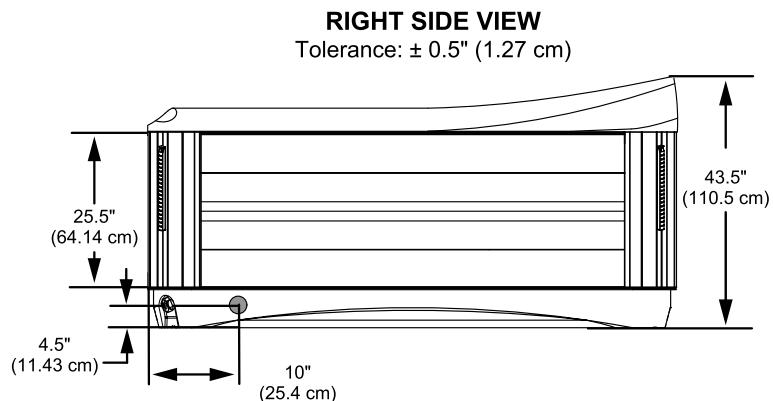

**\*IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

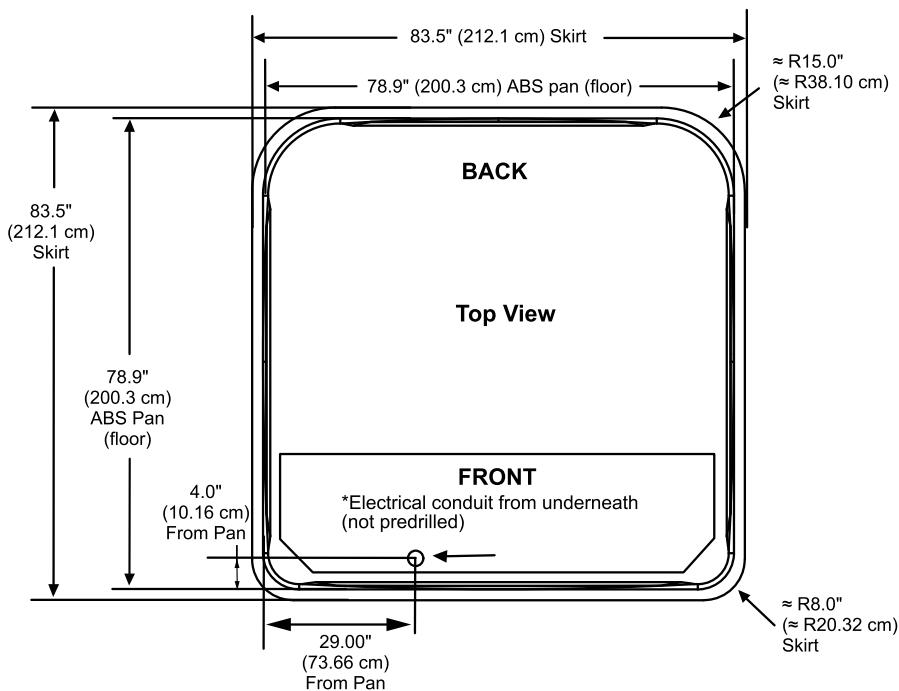


Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-LXL


## Specifications

<b>Seating Capacity</b>	.....5-6
<b>Dimensions</b>	.....89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); <b>For complete dimensions, see page 80</b>
<b>Dry Weight</b>	.....914 lbs (415 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,625 lbs (2,098 kg)
<b>Filled Weight (Average Fill)</b>	.....3,666 lbs (1,663 kg)
<b>Water Capacity (Spa Volume)</b>	.....445 US gallons (1,685 Liters)
<b>Water Capacity (Average Fill)</b>	.....330 US gallons (1,249 Liters)
<b>Electronic Controls</b>	.....ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Total PowerPro® Jets</b>	.....39 (Plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Rotational, 6 PowerPro® FX
<b>Seat B Jets</b>	.....4 PowerPro® RX
<b>Seat C Jets</b>	.....2 PowerPro® NX2, 7 PowerPro® FX, 2 IR Therapy Lights
<b>Seat D Jets</b>	.....2 PowerPro® FX Rotational
<b>Seat E Jets</b>	.....2 PowerPro® FX Large Rotational, 2 PowerPro® MX
<b>Seat F Jets</b>	.....2 PowerPro® NX2
<b>Footwell (G)</b>	.....2 PowerPro® FX, 2 PowerPro® MX
<b>Massage Selector</b>	.....1
<b>Air Controls</b>	.....3, On/Off rocker switch air controller
<b>Water Management System</b>	.....One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	..... <b>ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	.....Two underwater light with 4 color modes, waterfall lights, exterior corner lights
<b>Cabinet</b>	.....Modern Hardwood, Brushed Gray, Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Porcelain
<b>Headrests</b>	.....3
<b>Waterfalls</b>	.....One; Independent flow rate (on or off) adjustment powered by pump 1
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow
<b>Export (50 Hz):</b>	..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year True™ Water System, 2 Years Lights; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	.....N/A

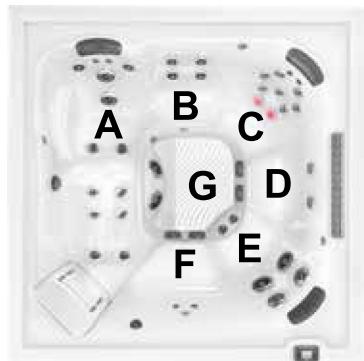

# Jacuzzi J-LXL

## Operation/Seat Depths

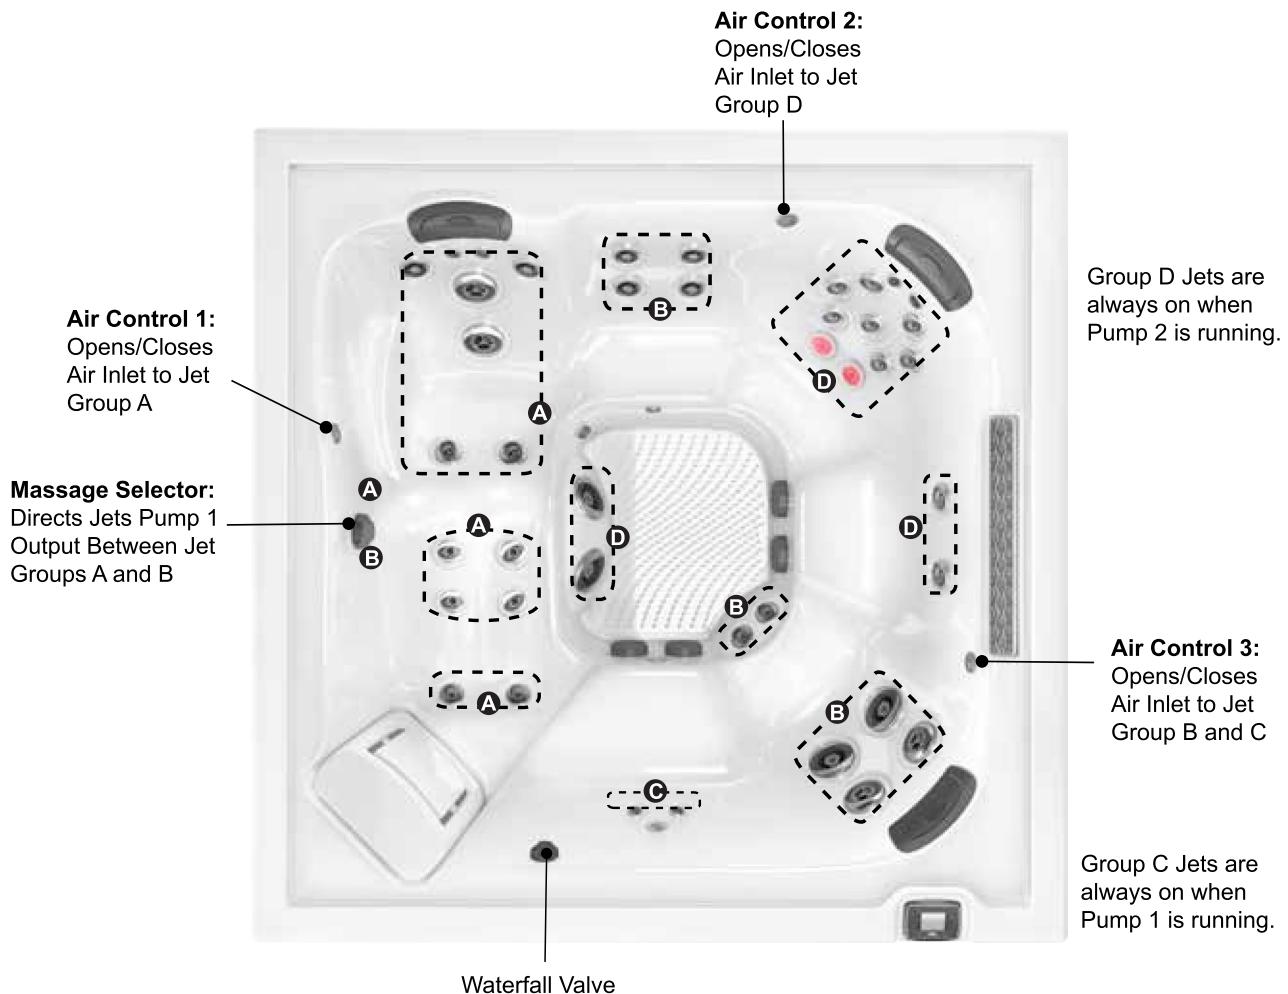

**39 Total Jets (plus 2 IR Therapy Lights)**




Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.00" (63.50 cm)**  
**B = 22.00" (55.88 cm)**  
**C = 27.00" (68.58 cm)**  
**D = 20.88" (53.02 cm)**  
**E = 26.25" (66.68 cm)**

**F = 18.38" (46.67 cm)**  
**G = 24.25" (61.60 cm)**  
**H = 31.00" (78.74 cm)**

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

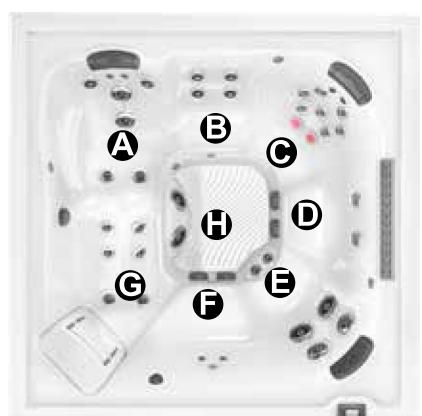


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-LXL

## Dimensions


**TOP VIEW**

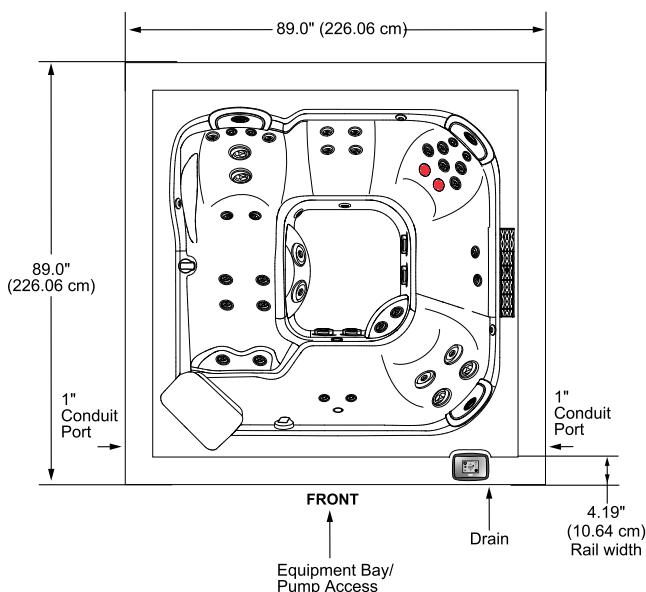


**FRONT/BACK SIDE VIEW**

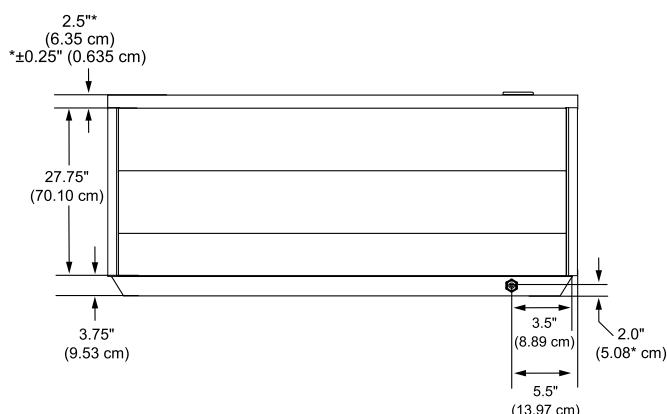

**RIGHT SIDE VIEW**

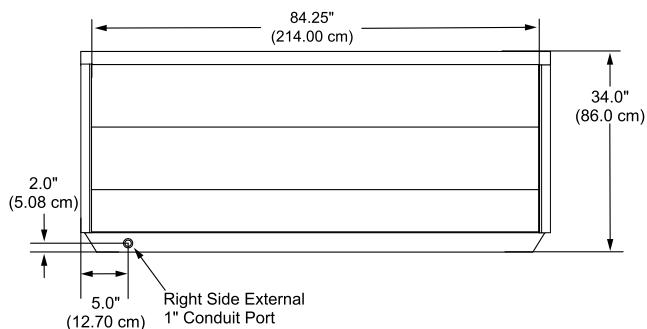

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

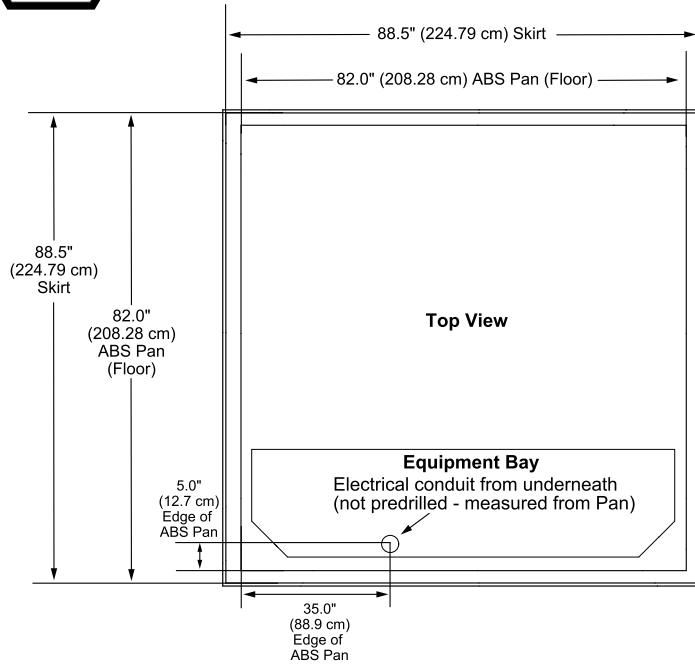


Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-LX


## Specifications

<b>Seating Capacity</b>	.....6-7
<b>Dimensions</b>	.....89" x 89" x 34" (226.06 cm x 226.06 cm x 86 cm); <b>For complete dimensions, see page 80</b>
<b>Dry Weight</b>	.....855 lbs (388 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,525 (2,052 kg)
<b>Filled Weight (Average Fill)</b>	.....3,607 lbs (1,636 kg)
<b>Water Capacity (Spa Volume)</b>	.....440 US gallons (1,666 Liters)
<b>Water Capacity (Average Fill)</b>	.....330 US gallons (1,249 Liters)
<b>Electronic Controls</b>	.....ProTouch™ 2 LCD control panel, user interface displays temperature, time, cycles and fingertip jet control. Offers customizing of pre-programmed filtration cycles, heating modes and water temperature setting.
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 5.1 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Total PowerPro® Jets</b>	.....41 (plus 2 IR Therapy Lights)
<b>Seat A Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® RX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX
<b>Seat B Jets</b>	.....2 PowerPro® FX Large Rotational, 2 PowerPro® MX, 2 PowerPro® FX
<b>Seat C Jets</b>	.....4 PowerPro® RX
<b>Seat D Jets</b>	.....2 PowerPro® NX2, 9 PowerPro® FX, 2 IR Therapy Lights
<b>Seat E Jets</b>	.....3 PowerPro® FX
<b>Seat F Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® RX, 1 PowerPro® FX Large Rotational, 2 PowerPro® FX
<b>Seat G Jets</b>	.....2 PowerPro® NX2
<b>Massage Selector</b>	.....1
<b>Air Controls</b>	.....4, On/Off rocker switch air controller
<b>Water Management System</b>	.....One ProClarity® 40 ft <sup>2</sup> filter cartridge and 1 ProClarity® depth load filter on 8-hour circulation pump; one ProCatch® bag with ProClear® 60 ft <sup>2</sup> filter; Floating Weir; True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	..... <b>ClearRay Active Oxygen® System</b>
<b>LED Lighting</b>	.....Two underwater light with 4 color modes, waterfall lights, exterior corner lights
<b>Cabinet</b>	.....Modern Hardwood, Brushed Gray, Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Porcelain
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....One; Independent flow rate (on or off) adjustment powered by pump 1
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow
<b>Export (50 Hz):</b>	..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A ..... <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, or 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 1 Year True™ Water System, 2 Years Lights; ..... <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	.....N/A

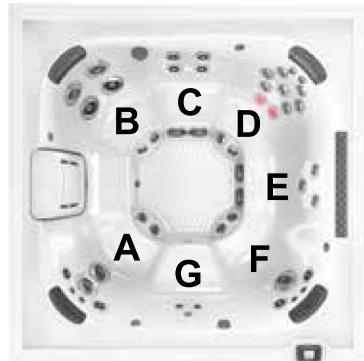

# Jacuzzi J-LX

## Operation/Seat Depths

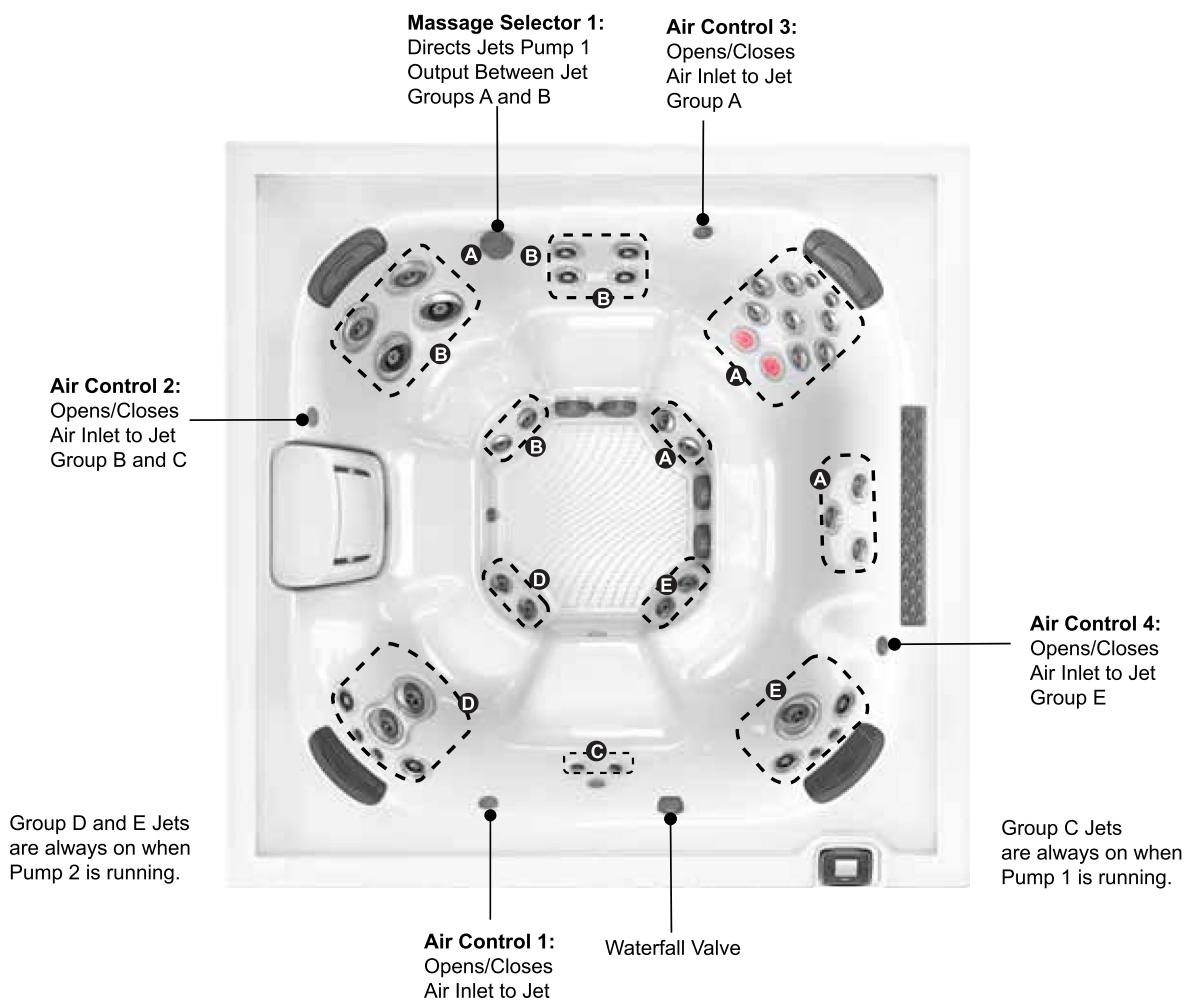

**41 Total Jets (plus 2 IR Therapy Lights)**



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 24.25" (61.60 cm)**  
**B = 21.13" (53.66 cm)**  
**C = 26.13" (66.36 cm)**  
**D = 20.50" (52.07 cm)**  
**E = 26.81" (68.10 cm)**

**F = 25.00" (63.50 cm)**  
**G = 26.31" (66.83 cm)**  
**H = 18.00" (45.72 cm)**  
**I = 31.00" (78.74 cm)**

Listed dimensions represent distance from top of the deck to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-LX

## Dimensions


**TOP VIEW**

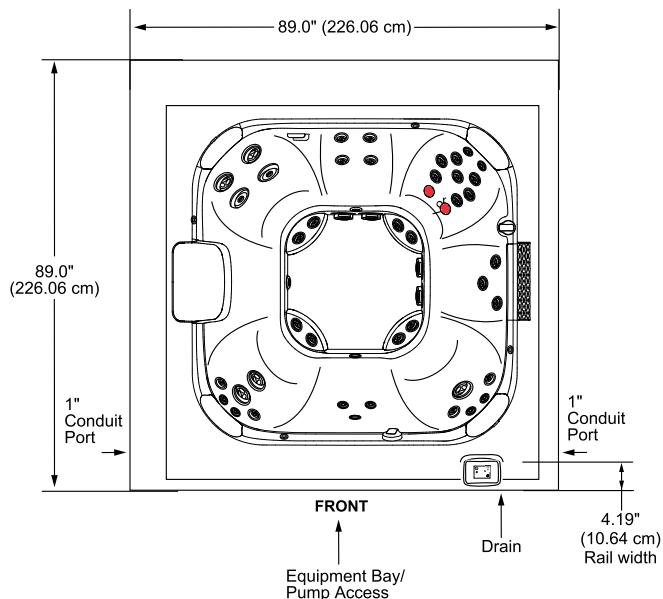

**FRONT/BACK SIDE VIEW**

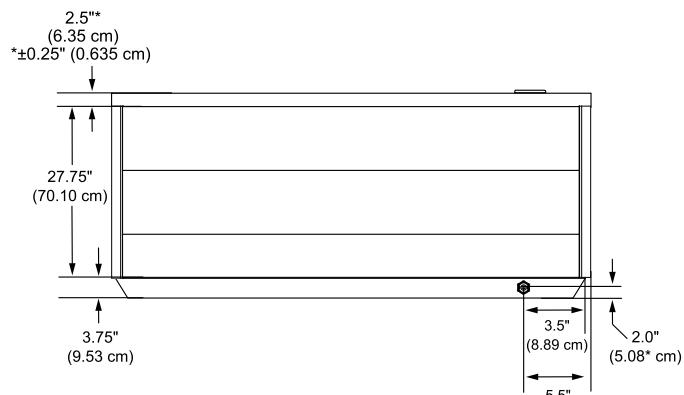


**RIGHT SIDE VIEW**

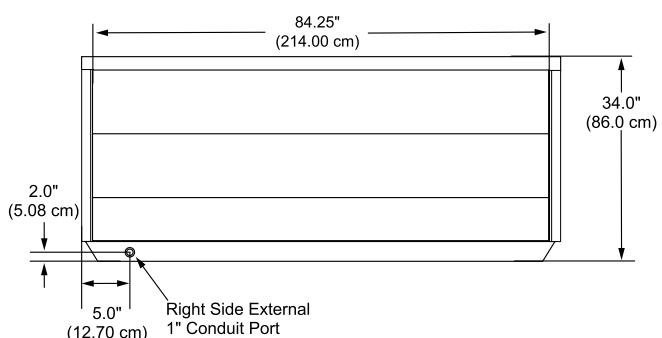

**STOP**

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

**STOP**

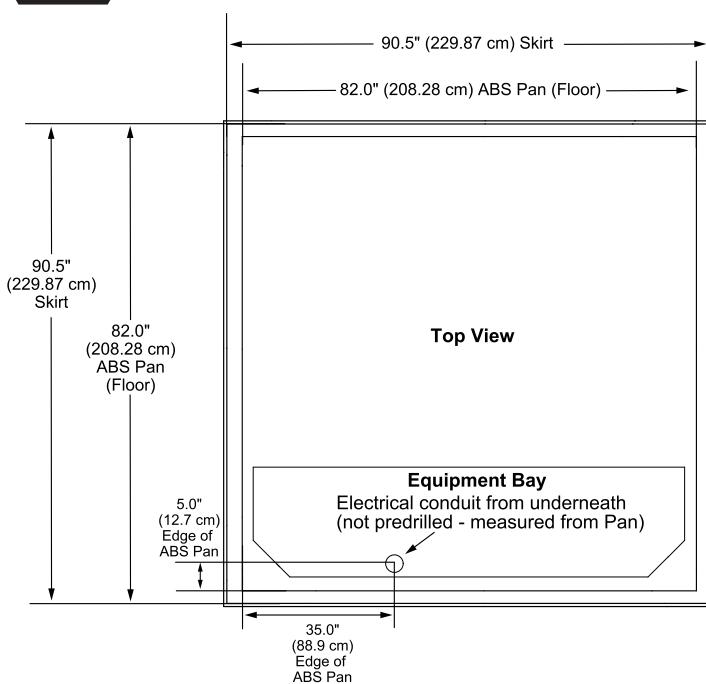

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)


# Jacuzzi J-385

## Specifications

<b>Seating Capacity</b>	.....6-7
<b>Dimensions</b>	.....91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); <b>For complete dimensions, see page 81</b>
<b>Dry Weight</b>	.....850 lbs (386 kg)
<b>Filled Weight (Spa Volume)</b>	.....5,771 lbs (2,618 kg)
<b>Filled Weight (Average Fill)</b>	.....4,686 lbs (2,126 kg)
<b>Water Capacity (Spa Volume)</b>	.....590 US gallons (2,233 Liters)
<b>Water Capacity (Average Fill)</b>	.....460 US gallons (1,741 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz): 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....51
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....1 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Seat C Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX Rotational, 4 PowerPro® FX, 2 PowerPro® FX Large
<b>Seat D Jets</b>	.....2 PowerPro® FX Large Rotational
<b>Seat E Jets (Standard model)</b>	.....10 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® BX
<b>Seat E Jets (optional IR Therapy)</b>	.....8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational, 2 PowerPro® BX
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® NX2, 3 PowerPro® MX
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker switch air controller
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and a subwoofer

\*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice

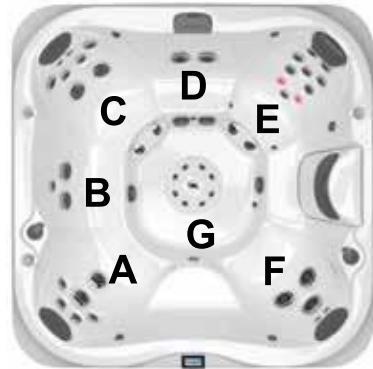

Shown with the optional  
IR Therapy Lights

# Jacuzzi J-385

## Operation/Seat Depths

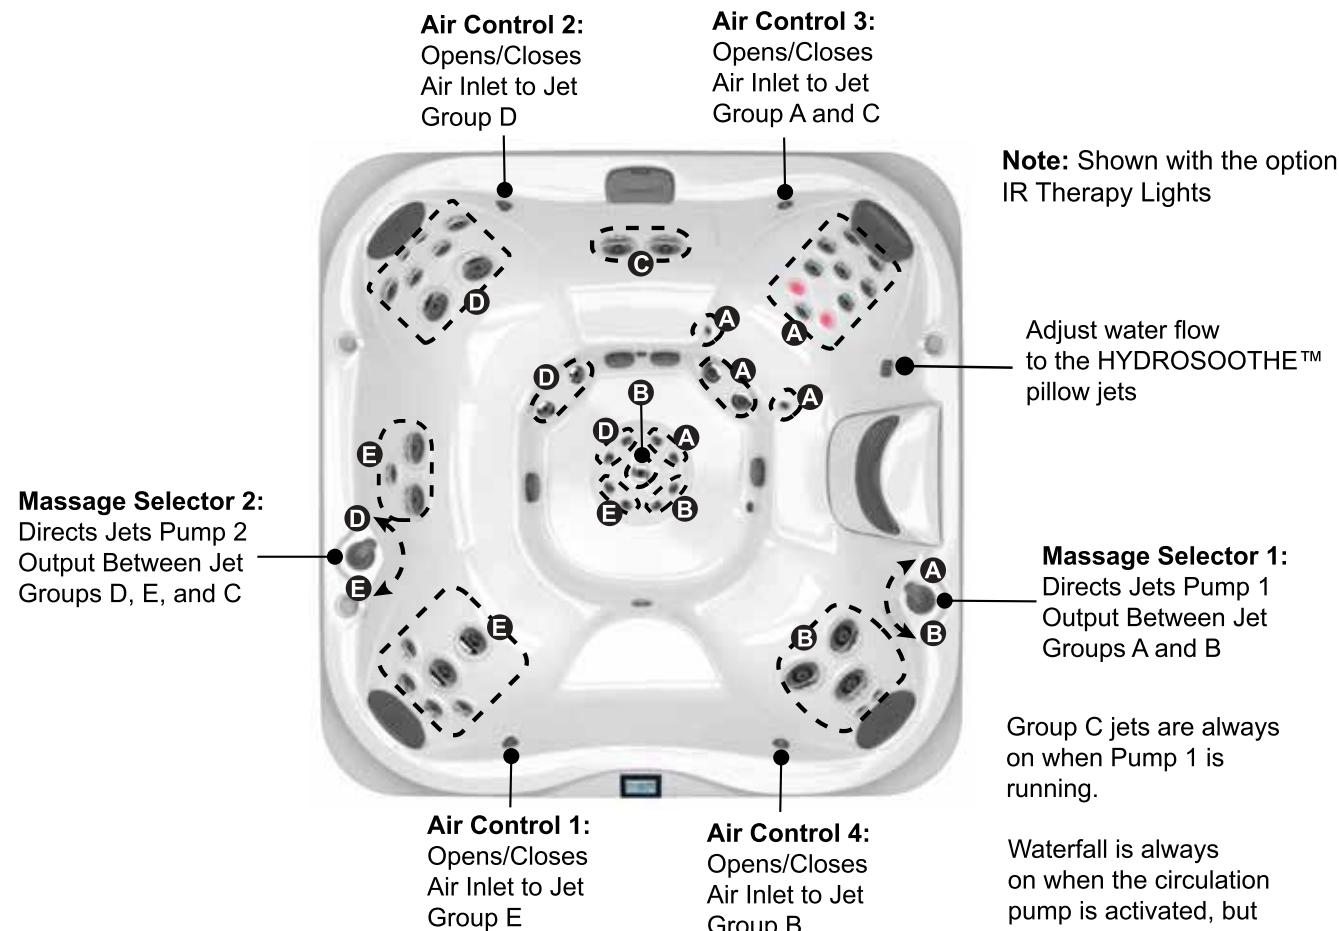

**51 Total Jets**



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 26.50" (67.31 cm)**

**B = 25.00" (63.50 cm)**

**C = 26.75" (67.95 cm)**

**D = 23.25" (59.06 cm)**

**E = 28.25" (71.76 cm)**

**F = 27.13" (68.90 cm)**

**G = 17.00" (43.18 cm)**

**H = 33.25" (84.46 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat.  
Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-385

## Dimensions

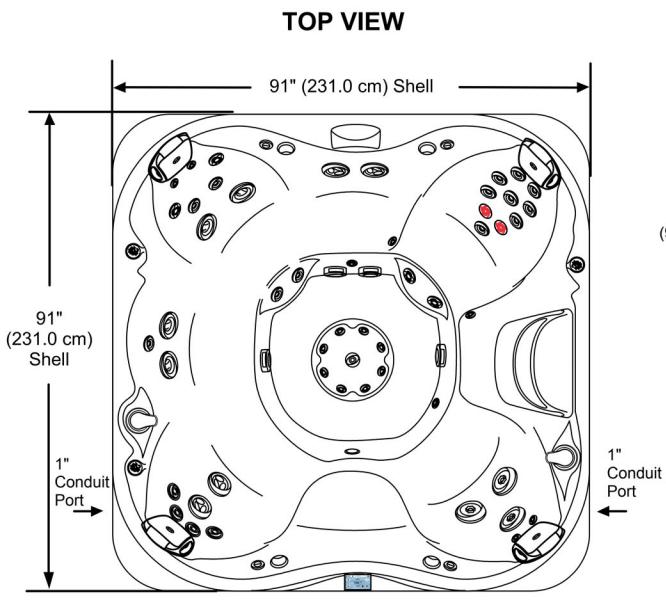


**FRONT**


Equipment Bay/Pump Access  
ClearRay Active Oxygen,  
Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

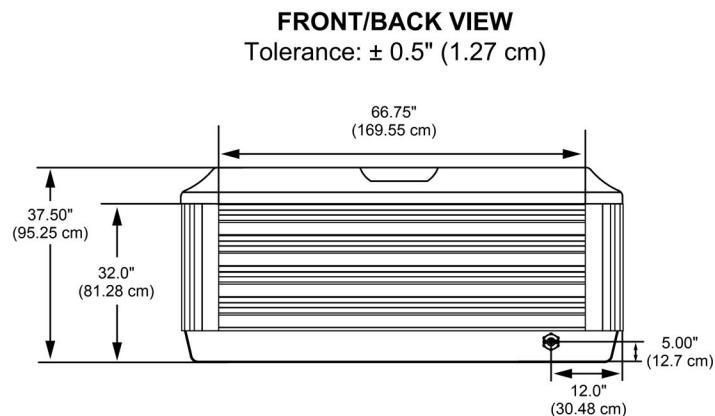

**LEFT SIDE VIEW**  
Tolerance:  $\pm 0.5"$  (1.27 cm)

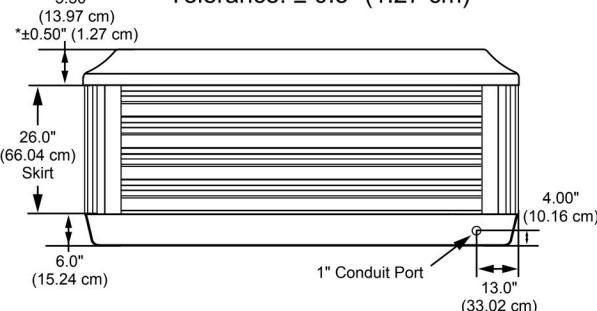


**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

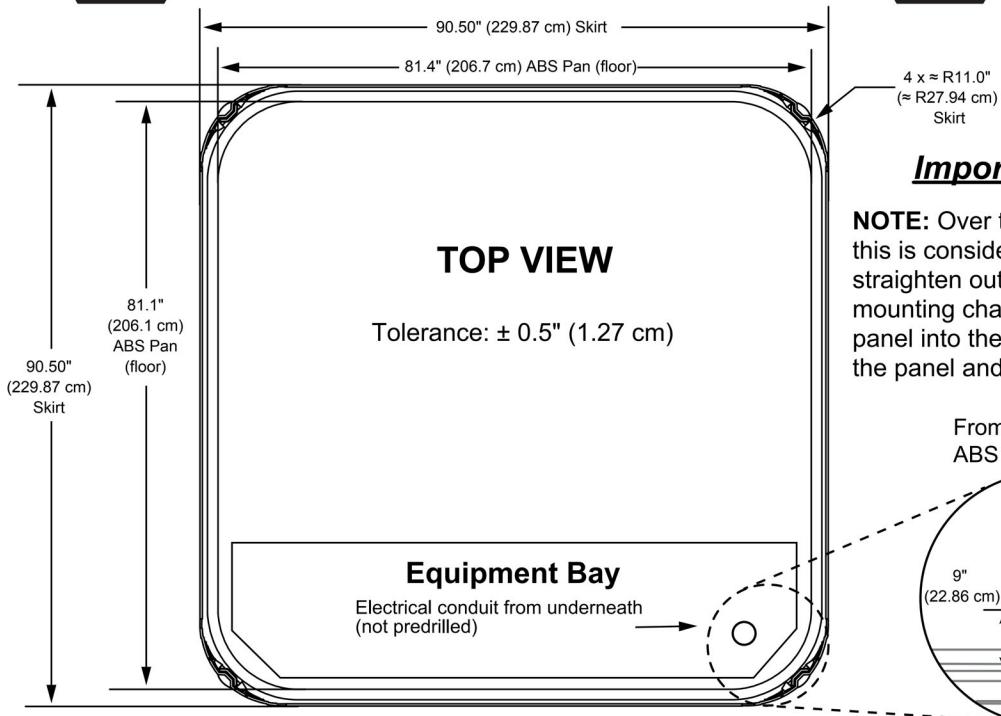

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the  
ABS pan




Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-375

## Specifications


<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	91" x 91" x 37.50" (231 cm x 231 cm x 95.25 cm); <b>For complete dimensions, see page 81</b>
<b>Dry Weight</b>	830 lbs (376 kg)
<b>Filled Weight (Spa Volume)</b>	5,667 lbs (2,571 kg)
<b>Filled Weight (Average Fill)</b>	4,541 lbs (2,060 kg)
<b>Water Capacity (Spa Volume)</b>	580 US gallons (2,196 Liters)
<b>Water Capacity (Average Fill)</b>	445 US gallons (1,685 Liters)
<b>Electronic Controls</b>	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater</b>	North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz) 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	52
<b>Seat A Jets</b>	2 PowerPro® NX2, 2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX
<b>Seat B Jets</b>	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
<b>Seat C Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat D Jets (Standard model)</b>	10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat D Jets (optional IR Therapy)</b>	8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
<b>Seat D HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat E Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX, 2 PowerPro® FX
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	4, On/Off rocker switch air controller
<b>Water Management System</b>	Two 60 ft <sup>2</sup> Filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	One underwater prolite with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	4
<b>Waterfalls</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

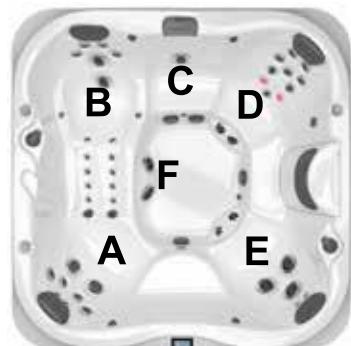

Shown with the optional  
IR Therapy Lights

# Jacuzzi J-375

## Operation/Seat Depths

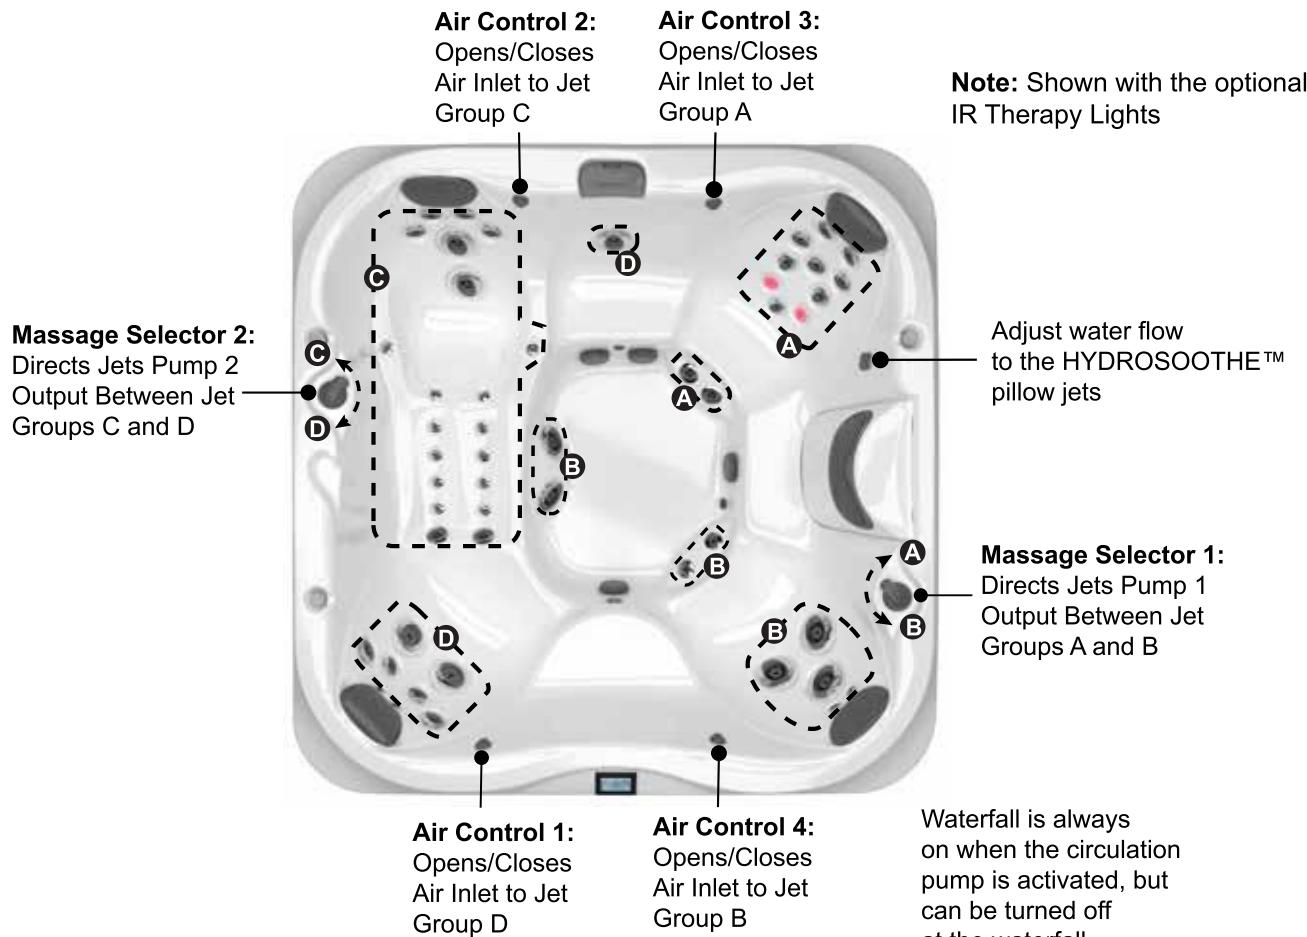

**52 Total Jets**



Spa Operation Subject to Change without Notice

## Seat Depths

**A = 26.50" (67.31 cm)**  
**B = 27.50" (69.85 cm)**  
**C = 23.50" (59.69 cm)**  
**D = 28.25" (71.76 cm)**  
**E = 27.25" (69.22 cm)**

**F = 17.00" (43.18 cm)**  
**G = 34.00" (86.36 cm)**


Listed dimensions represent distance from top of acrylic to lowest point in seat.  
 Tolerance  $\pm 0.5"$  (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-375


## Dimensions

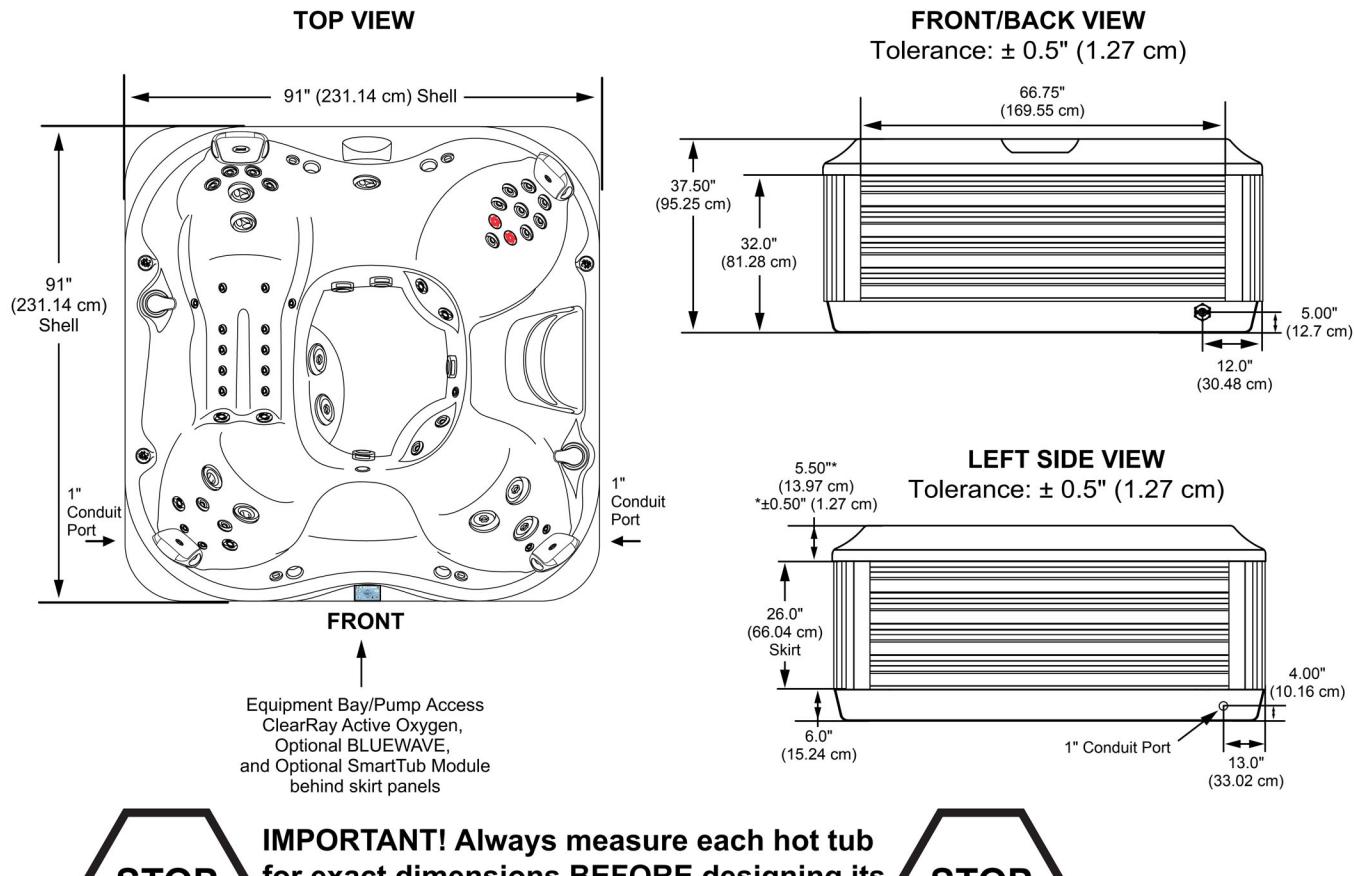

**STOP**

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

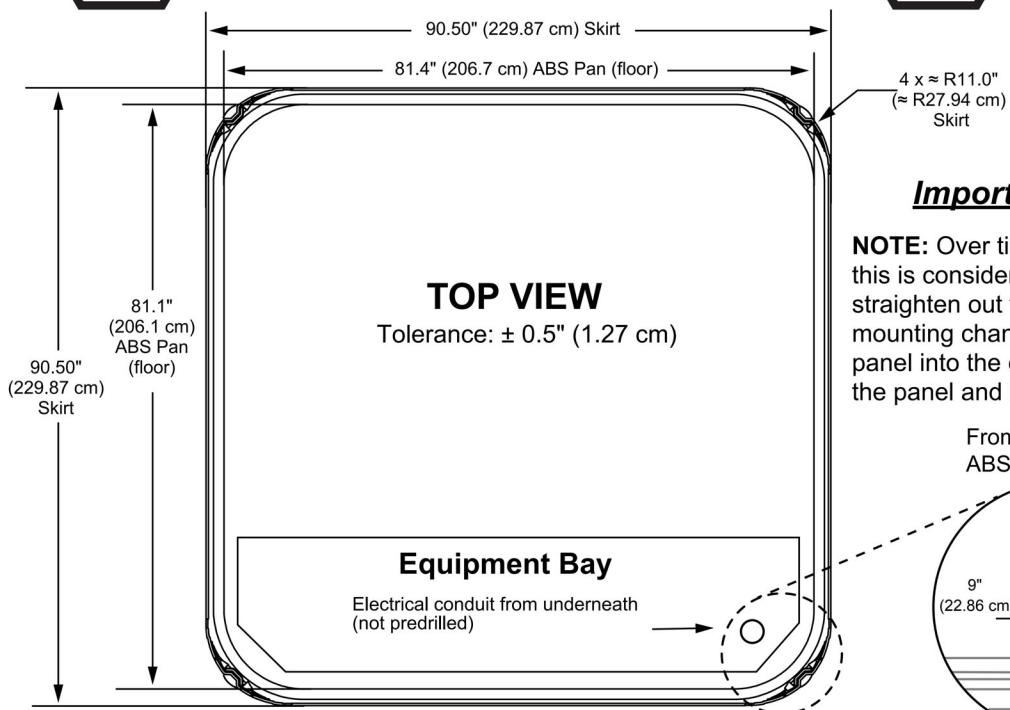

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-365

## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	.....805 lbs (365 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,975 lbs (2,257 kg)
<b>Filled Weight (Average Fill)</b>	.....4,099 lbs (1,859 kg)
<b>Water Capacity (Spa Volume)</b>	.....500 US gallons (1,893 Liters)
<b>Water Capacity (Average Fill)</b>	.....395 US gallons (1,495 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-Hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz) 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....46
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....1 PowerPro® FX Large
<b>Seat C Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX, 3 PowerPro® MX
<b>Seat D Jets</b>	.....1 PowerPro® FX Large Rotational
<b>Seat E Jets (Standard model)</b>	.....10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat E Jets (optional IR Therapy)</b>	.....8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® NX2, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Large
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfalls</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

\*(See Warranty Document for Specific Details)

Dimensions/Specifications are Subject to Change Without Notice




Show with the optional  
IR Therapy Lights

# Jacuzzi J-365

## Operation/Seat Depths

**Note:** Shown with the optional IR Therapy Lights

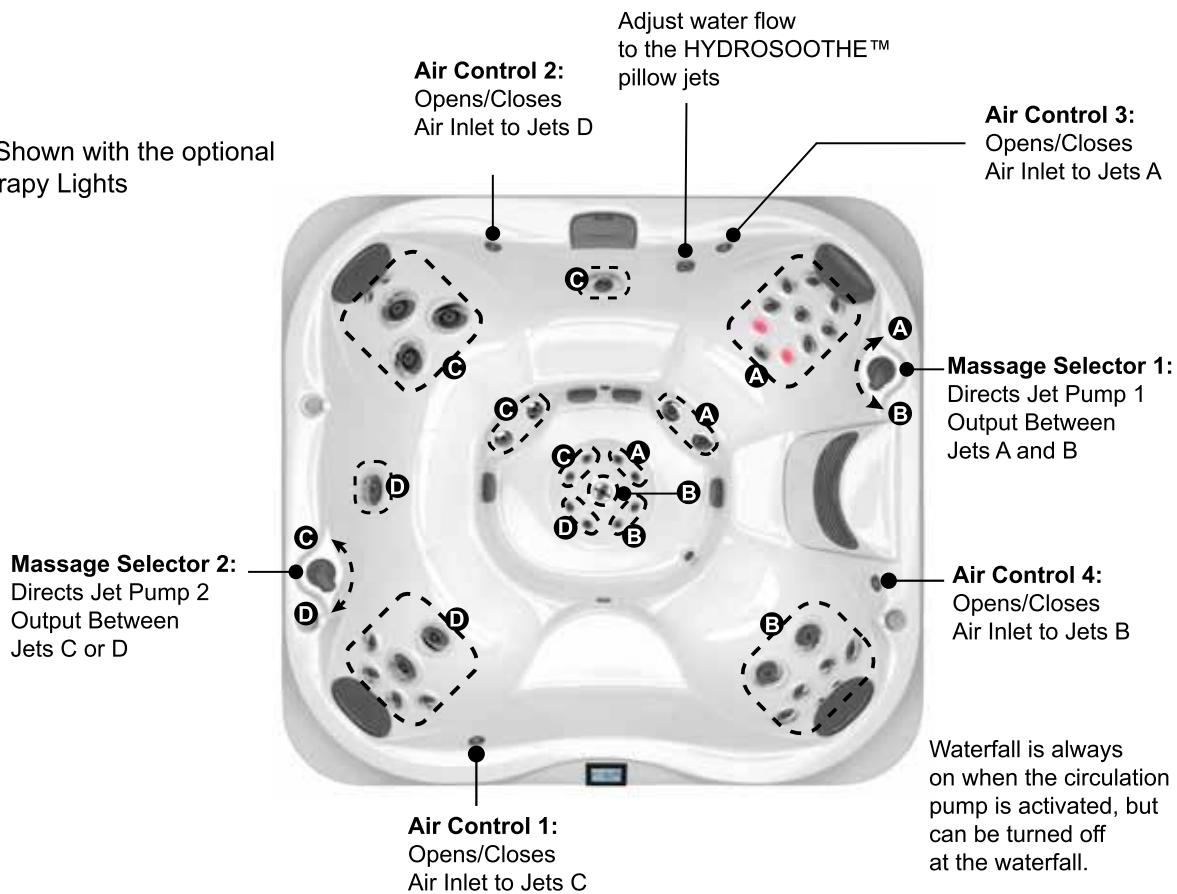

### 46 Total Jets



Spa Operation Subject to Change without Notice

## Seat Depths

- A = 26.50" (67.47 cm)**
- B = 25.25" (64.14 cm)**
- C = 25.25" (64.14 cm)**
- D = 23.75" (60.33 cm)**
- E = 28.25" (71.76 cm)**

- F = 27.25" (69.22 cm)**
- G = 17.50" (44.45 cm)**
- H = 33.75" (85.73 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-365


## Dimensions

**TOP VIEW**

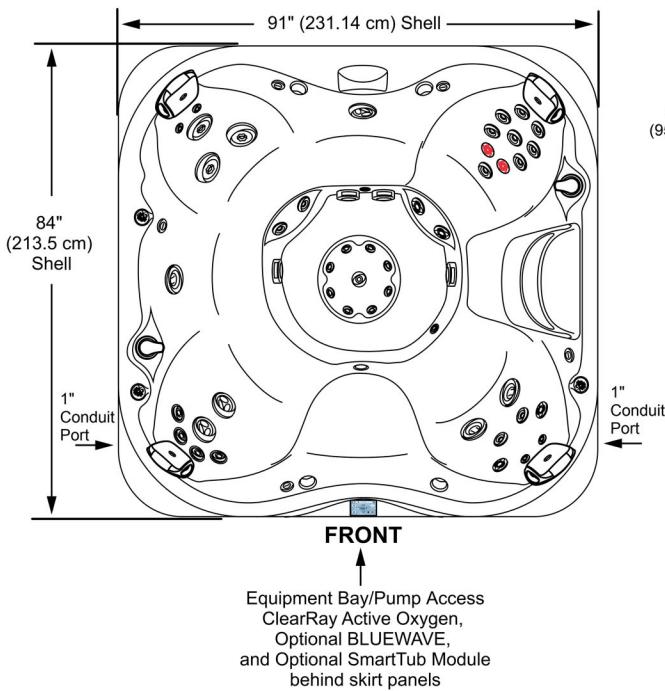


**FRONT/BACK VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

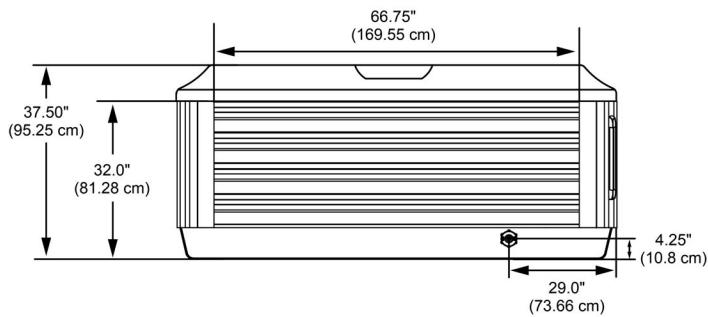

**LEFT SIDE VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

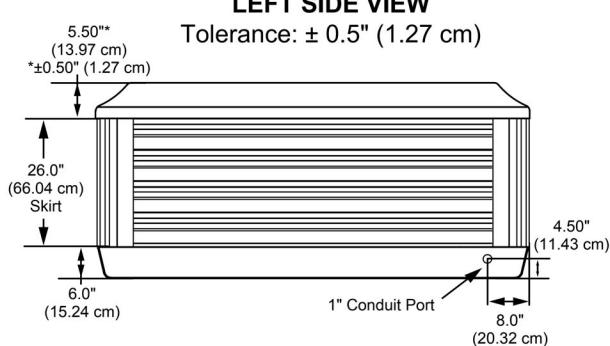


**STOP**

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

**STOP**


**TOP VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

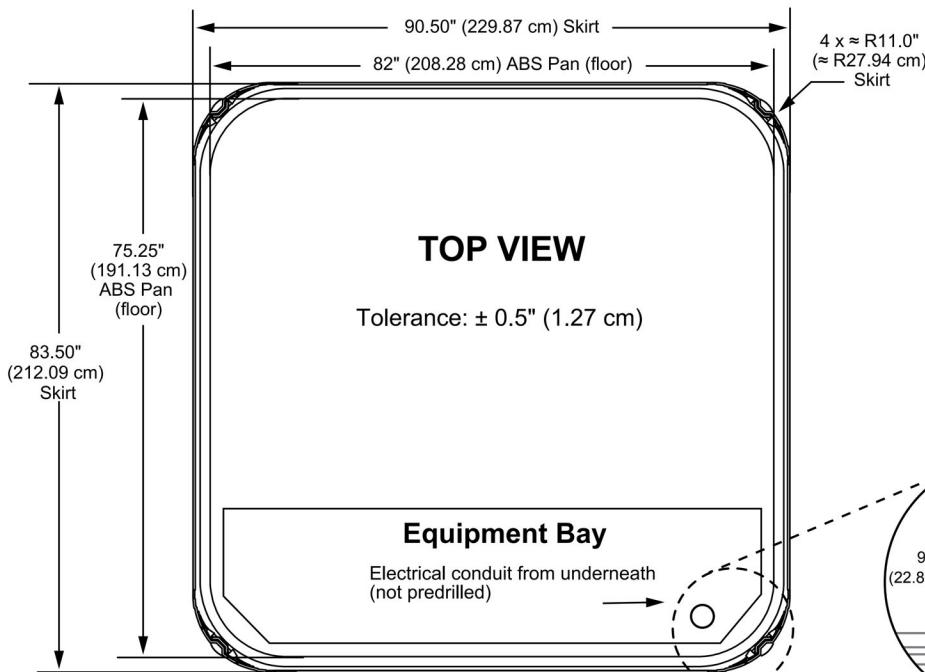

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-355

## Specifications

<b>Seating Capacity</b>	5-6 Adults
<b>Dimensions</b>	84" x 91" x 37.50" (213.5 cm x 231 cm x 95.25 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	813 lbs (369 kg)
<b>Filled Weight (Spa Volume)</b>	4,900 lbs (1,855 kg)
<b>Filled Weight (Average Fill)</b>	3,815 lbs (1,731 kg)
<b>Water Capacity (Spa Volume)</b>	490 US gallons (1,855 Liters)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Electronic Controls</b>	Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	Yes, 8-hour
<b>Heater</b>	North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz): 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	44
<b>Seat A Jets</b>	2 PowerPro® NX2, 3 PowerPro® MX
<b>Seat B Jets</b>	2 PowerPro® FX Large
<b>Seat C Jets (Standard model)</b>	10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat C Jets (optional IR Therapy)</b>	8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
<b>Seat C HYDROSOOTHE™ Jets</b>	2 PowerPro® FX Directional with independent flow rate valve
<b>Seat D Jets</b>	1 PowerPro® FX Large Rotational
<b>Seat E Jets</b>	4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 12 PowerPro® BX, 2 PowerPro® FX Rotational
<b>Footwell (F)</b>	2 PowerPro® MX
<b>Massage Selectors</b>	2
<b>Air Controls</b>	3, On/Off rocker style
<b>Water Management System</b>	Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	3
<b>Waterfalls</b>	One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements</b>	North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer




Shown with the optional  
IR Therapy Lights

# Jacuzzi J-355

## Operation/Seat Depths

**Note:** Shown with the optional IR Therapy Lights

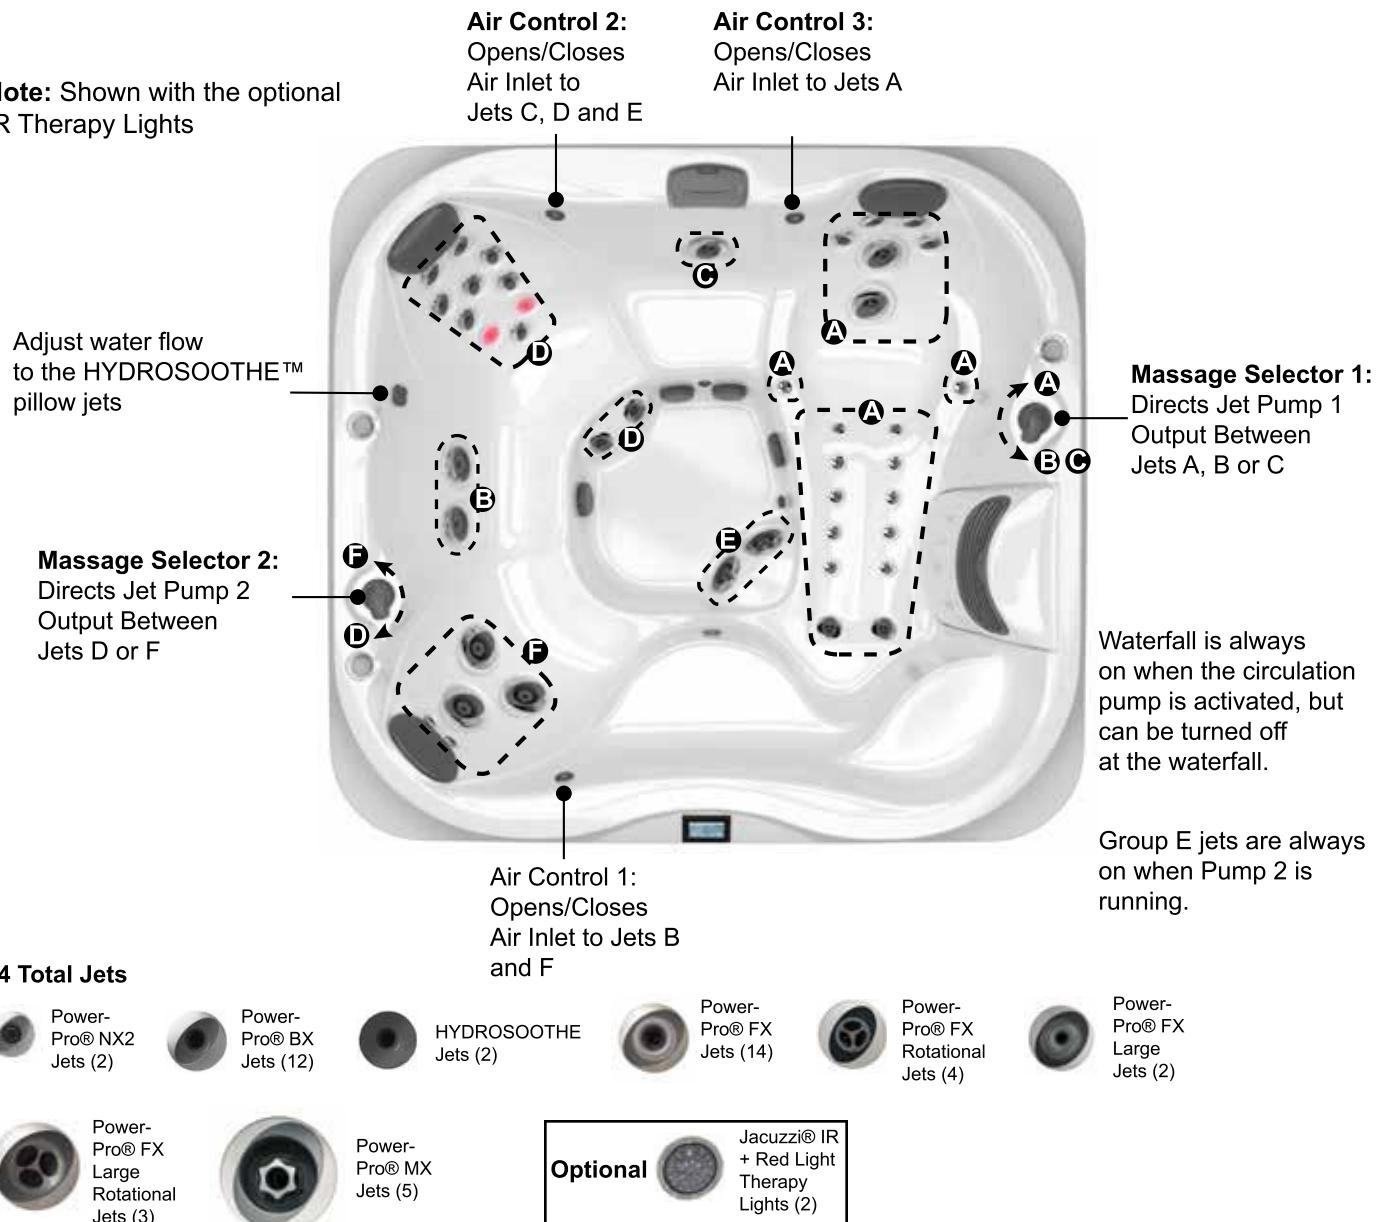

Spa Operation Subject to Change without Notice

## Seat Depths

- A = 25.25" (64.14 cm)**
- B = 26.50" (67.31 cm)**
- C = 28.75" (73.02 cm)**
- D = 21.25" (53.98 cm)**
- E = 27.00" (68.58 cm)**

- F = 9.25" (23.50 cm)**
- G = 13.50" (34.29 cm)**
- H = 33.25" (84.45 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-355


## Dimensions

**TOP VIEW**

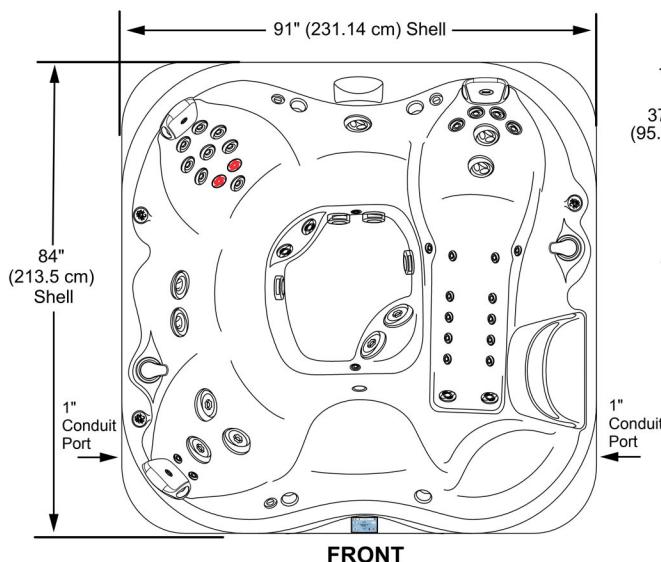


Equipment Bay/Pump Access  
ClearRay Active Oxygen,  
Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

**FRONT/BACK VIEW**

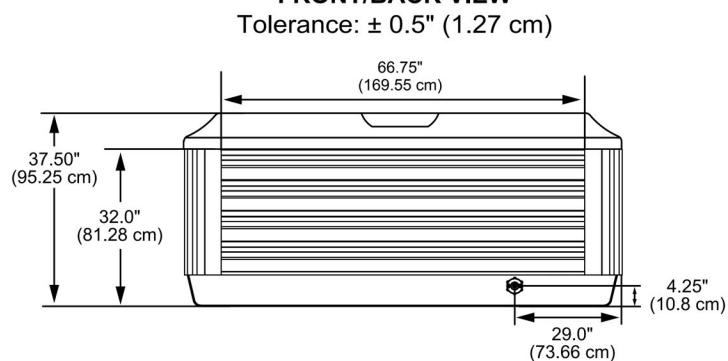

**LEFT SIDE VIEW**  
Tolerance:  $\pm 0.5"$  (1.27 cm)

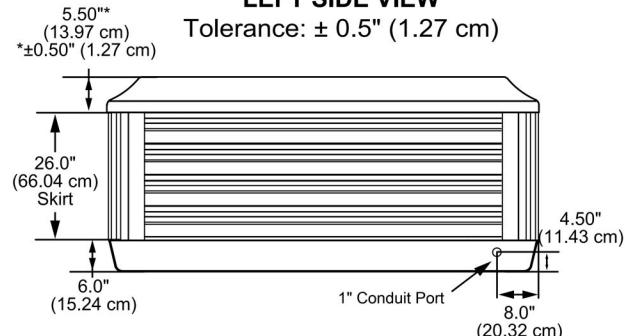


**STOP**

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.


**STOP**

**TOP VIEW**

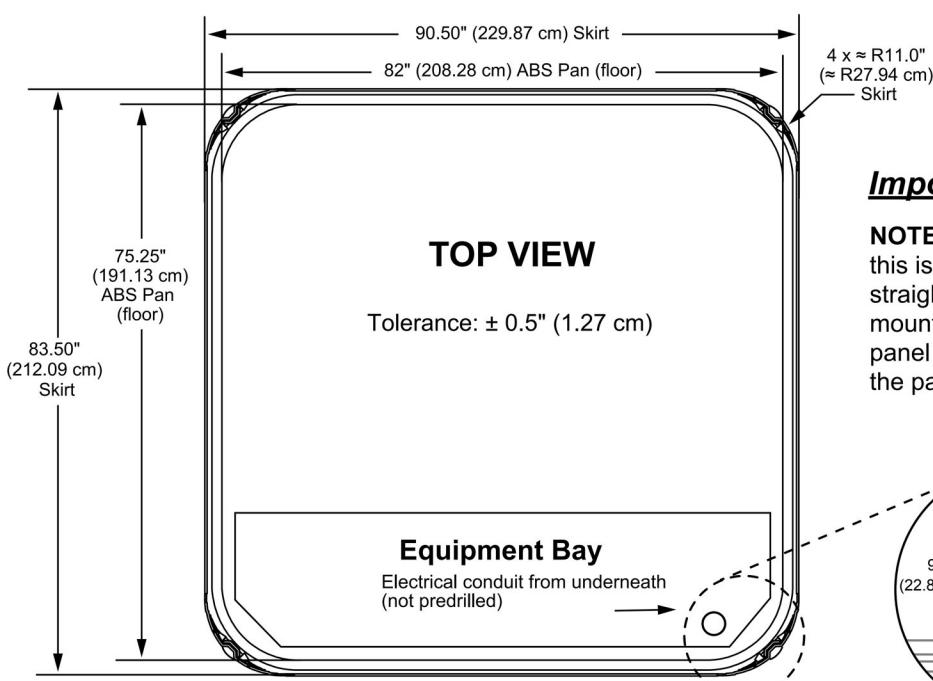

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.




From the edge of

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-345

## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	.....777 lbs (352 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,488 lbs (2,036 kg)
<b>Filled Weight (Average Fill)</b>	.....3,654 lbs (1,306 kg)
<b>Water Capacity (Spa Volume)</b>	.....445 US gallons (1,685 Liters)
<b>Water Capacity (Average Fill)</b>	.....345 US gallons (1,306 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater</b>	.....North America (60 Hz): 5.5kW High Flow <b>Export (50 Hz) 2.7kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....41
<b>Seat A Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational, 2 PowerPro® FX Small
<b>Seat B Jets</b>	.....2 PowerPro® FX
<b>Seat C Jets</b>	.....3 PowerPro® MX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Small
<b>Seat D Jets</b>	.....1 PowerPro® FX Large Rotational
<b>Seat E Jets (Standard model)</b>	.....10 PowerPro® FX, 2 PowerPro® FX Small
<b>Seat E Jets (optional IR Therapy)</b>	.....8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Small
<b>Seat E HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat F Jets</b>	.....2 PowerPro® FX Large, 2 PowerPro® FX Rotational, 2 PowerPro® FX, 2 PowerPro® FX Small
<b>Footwell (G)</b>	.....8 PowerPro® FX Small, 1 PowerPro® FX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....4, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years for Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

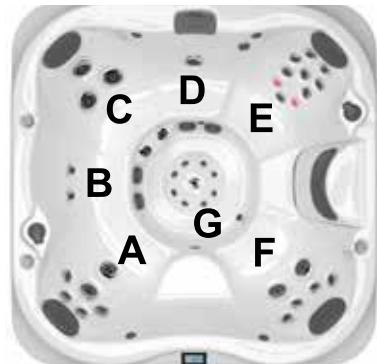


Shown with the optional  
IR Therapy Lights

# Jacuzzi J-345

## Operation/Seat Depths

**Note:** Shown with the optional IR Therapy Lights

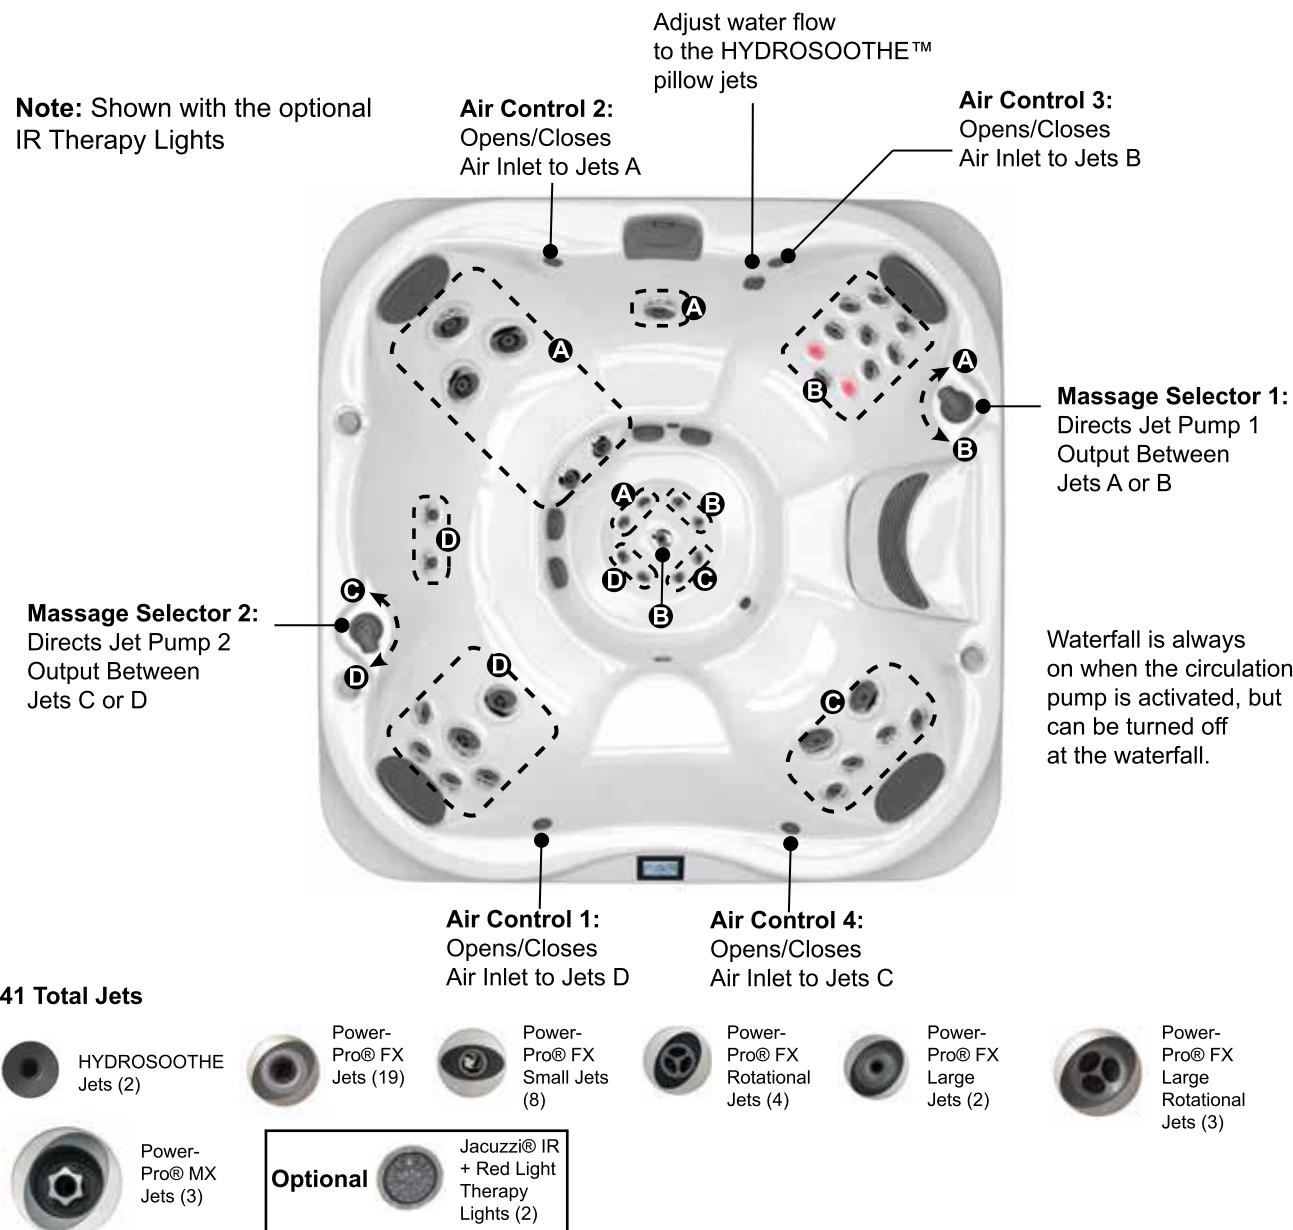

Spa Operation Subject to Change without Notice

## Seat Depths

<b>A = 25.25" (64.1 cm)</b>	<b>F = 25.13" (63.8 cm)</b>
<b>B = 25.25" (64.1 cm)</b>	<b>G = 16.75" (42.5 cm)</b>
<b>C = 25.13" (63.8 cm)</b>	<b>H = 33.50" (85.1 cm)</b>
<b>D = 23.50" (59.7 cm)</b>	
<b>E = 28.50" (72.4 cm)</b>	

Listed dimensions represent distance from top of acrylic to lowest point in seat.  
Tolerance  $\pm 0.5"$  (1.27 cm).




Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-345

## Dimensions


**TOP VIEW**

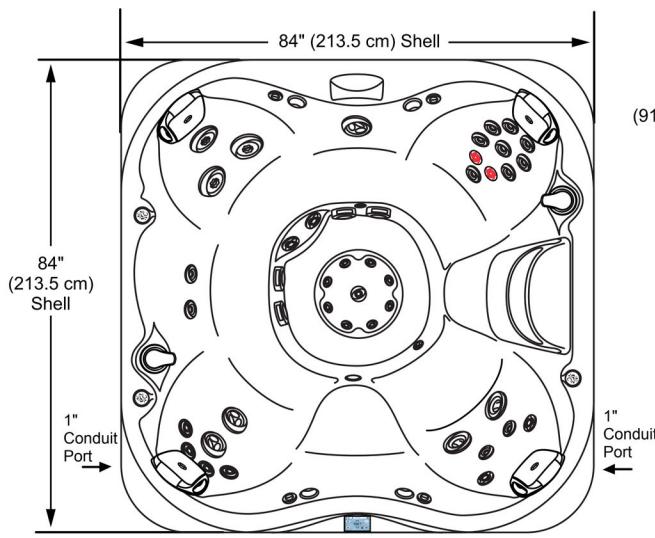


**FRONT**

Equipment Bay/Pump Access  
ClearRay Active Oxygen,  
Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

**FRONT/BACK VIEW**

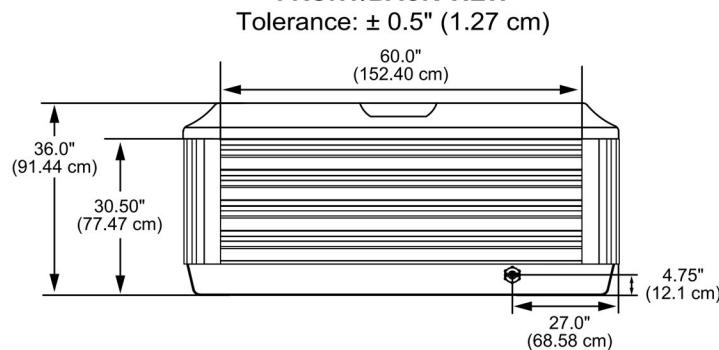


**LEFT SIDE VIEW**

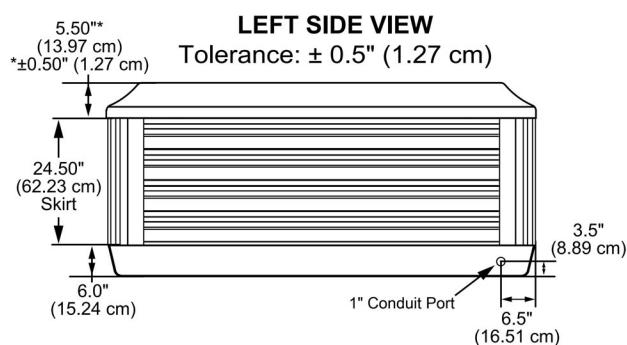

**STOP**


**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

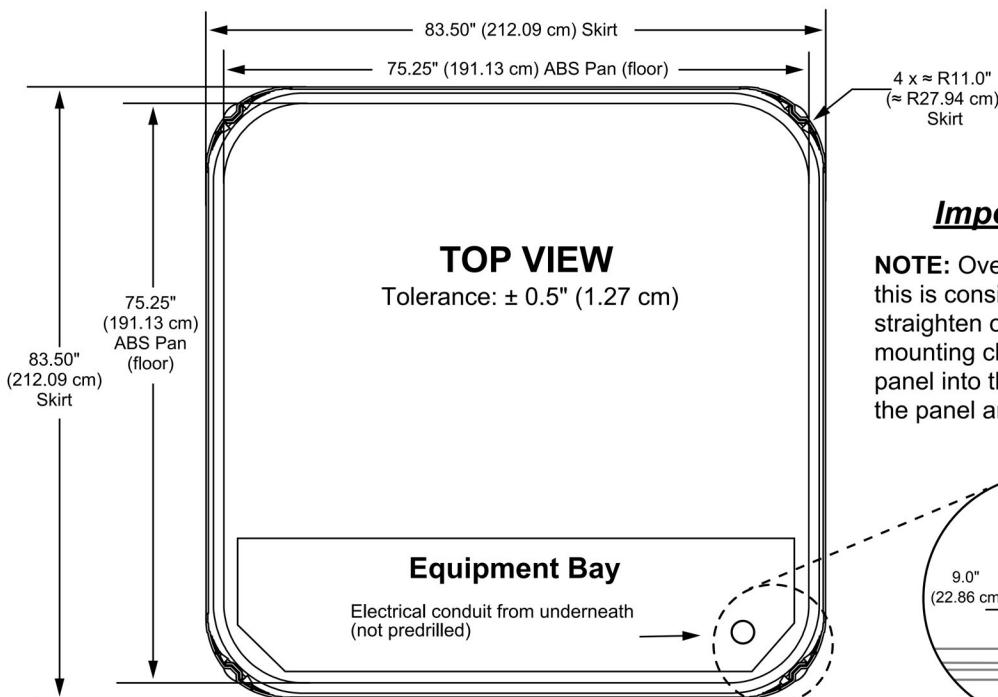

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.



From the edge of  
the ABS pan

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-335

## Specifications

<b>Seating Capacity</b>	.....5-6 Adults
<b>Dimensions</b>	.....84" x 84" x 36" (213.5 cm x 213.5 cm x 91.44 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	.....764 lbs (347 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,684 lbs (2,125 kg)
<b>Filled Weight (Average Fill)</b>	.....3,683 lbs (1,671 kg)
<b>Water Capacity (Spa Volume)</b>	.....450 US gallons (1,703 Liters)
<b>Water Capacity (Average Fill)</b>	.....350 US gallons (1,325 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater</b>	.....North America (60 Hz): 5.5 kW High Flow <b>Export (50 Hz): 2.7 kW High Flow</b>
<b>Total PowerPro® Jets</b>	.....42
<b>Seat A Jets</b>	.....2 PowerPro® FX Large Rotational
<b>Seat B Jets</b>	.....4 PowerPro® FX, 1 PowerPro® FX Large Rotational, 12 PowerPro® BX
<b>Seat C Jets</b>	.....1 PowerPro® FX Large Rotational
<b>Seat D Jets (Standard model)</b>	.....10 PowerPro® FX, 2 PowerPro® FX Rotational
<b>Seat D Jets (optional IR Therapy)</b>	.....8 PowerPro® FX, 2 IR Therapy Lights, 2 PowerPro® FX Rotational
<b>Seat D HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat E Jets</b>	.....2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Footwell (F)</b>	.....2 PowerPro® MX
<b>Massage Selectors</b>	.....2
<b>Air Controls</b>	.....3, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option) <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, cup holders, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A, or 60A <b>Export (50 Hz): 220-240 VAC@1x32A, 1x20A/1x16A, 3x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System), 2 IR Therapy Lights
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

\*(See Warranty Document for Specific Details)


Dimensions/Specifications are Subject to Change Without Notice



Shown with the optional  
IR Therapy Lights

# Jacuzzi J-335

## Operation/Seat Depths

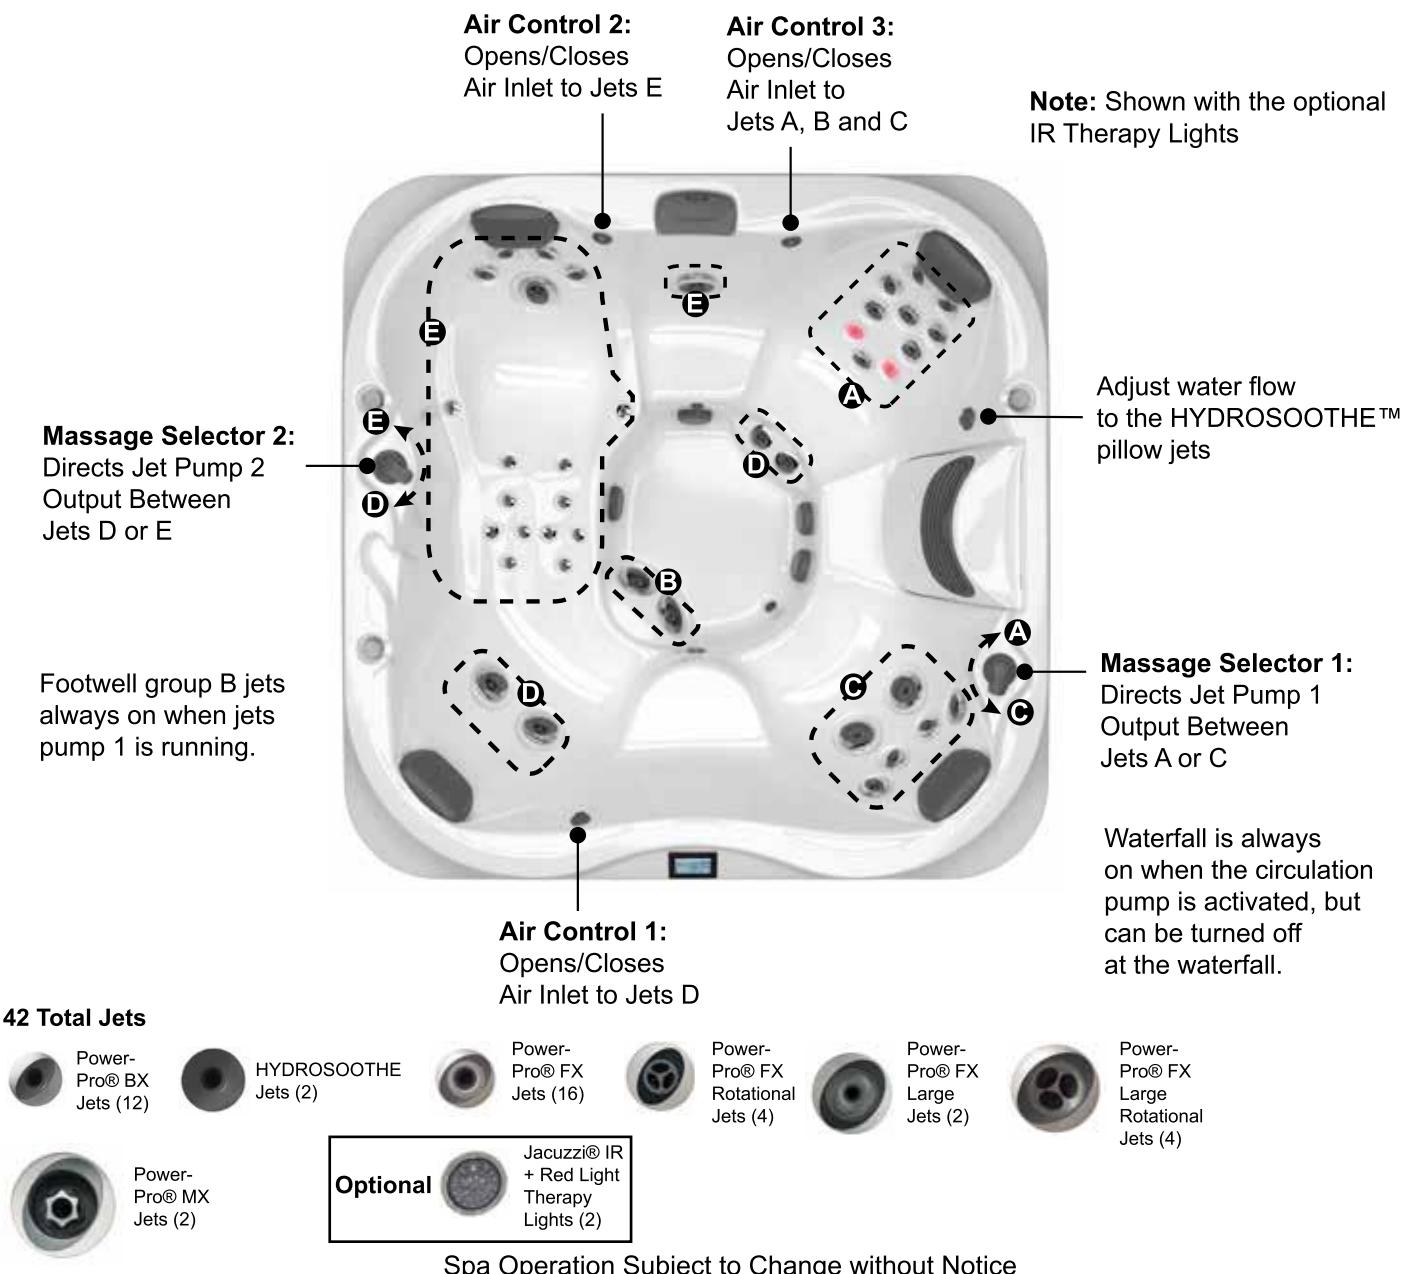

## Seat Depths

**A = 25.75" (65.4 cm)**  
**B = 27.50" (69.9 cm)**  
**C = 23.50" (59.7 cm)**  
**D = 28.25" (71.8 cm)**  
**E = 22.75" (57.8 cm)**

**F = 25.50" (64.8 cm)**  
**G = 16.75" (42.5 cm)**  
**H = 33.50" (85.1 cm)**




Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm$  0.5" (1.27 cm).



Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-335

## Dimensions

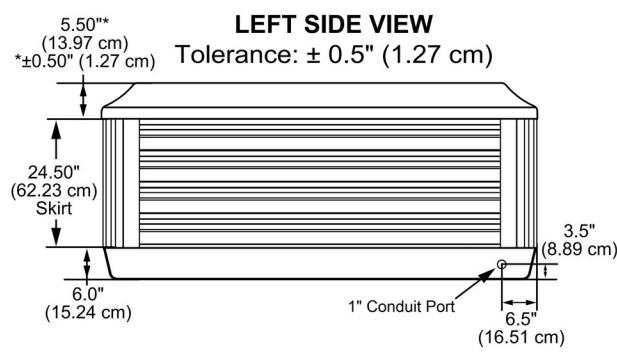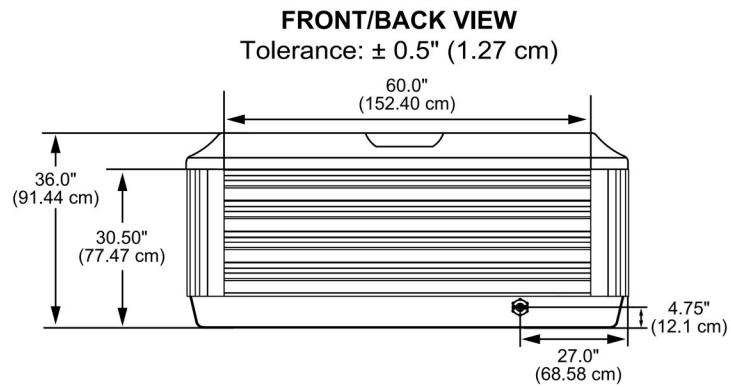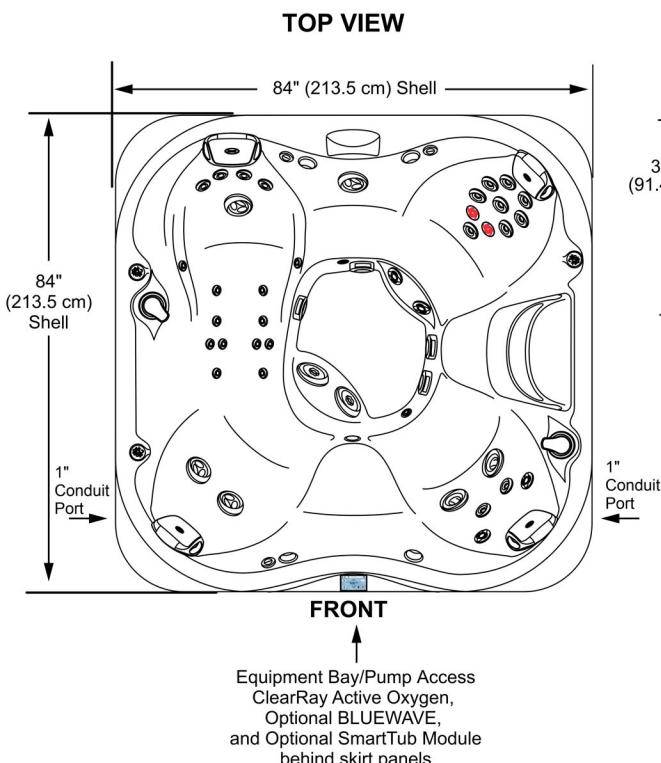

**STOP** **STOP**


**IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.**

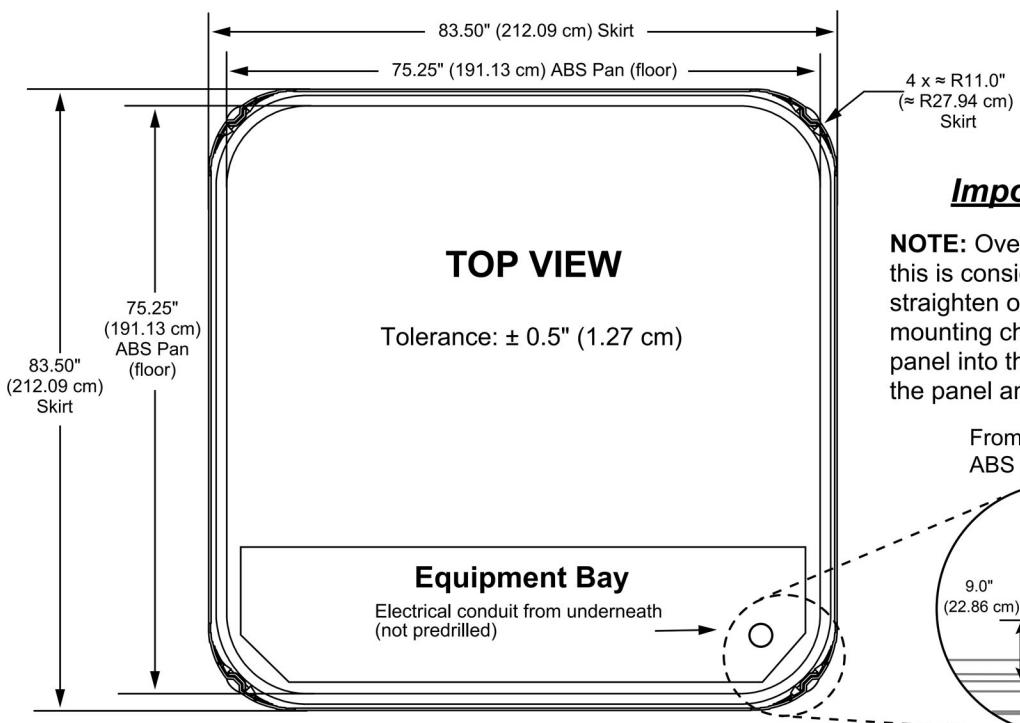

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan




Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-325


## Specifications

<b>Seating Capacity</b>	.....4-5 Adults
<b>Dimensions</b>	.....84" x 76" x 33.50" (213.5 cm x 193 cm x 85.09 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	.....619 lbs (281 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,372 lbs (1,983 kg)
<b>Filled Weight (Average Fill)</b>	.....3,413 lbs (1,548 kg)
<b>Water Capacity (Spa Volume)</b>	.....450 US gallons (1,703 Liters)
<b>Water Capacity (Average Fill)</b>	.....335 US gallons (1,268 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1 (Convertible)</b>	.....North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
<b>(3-Wire 240V)</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
<b>Export (50 Hz):</b>	<b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater (Convertible)</b>	.....North America (60 Hz): 1 kW/4.0 kW Low Flow
<b>(3-Wire 240V)</b>	.....North America (60 Hz): 4.0 kW Low Flow
<b>Export (50 Hz)</b>	<b>2.7 kW Low Flow</b>
<b>Total PowerPro® Jets</b>	.....23
<b>Seat A Jets</b>	.....2 PowerPro® FX, 2 PowerPro® FX Rotational, 2 PowerPro® FX Large
<b>Seat B Jets</b>	.....1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large
<b>Seat C Jets</b>	.....4 PowerPro® FX, 2 PowerPro® FX Large Rotational
<b>Seat C HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat D Jets</b>	.....2 PowerPro® FX Large Rotational
<b>Footwell (E)</b>	.....4 PowerPro® FX Small
<b>Massage Selectors</b>	.....1
<b>Air Controls</b>	.....4, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option)
<b>Export (50 Hz):</b>	<b>ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and exterior light
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): Convertible: 1kW/4kW; 3-Wire 240V 5.5 kW, High Flow
<b>Export (50 Hz):</b>	<b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A, North America (60 Hz): 3-Wire 240V@30A, 40A <b>Export (50 Hz): 220-240 VAC@1x16A or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD Breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

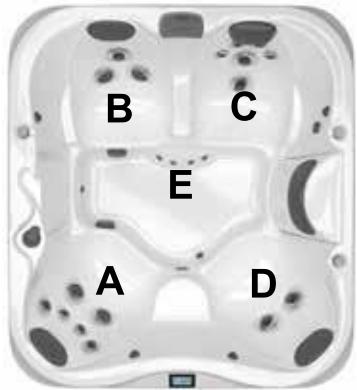

# Jacuzzi J-325

## Operation/Seat Depths

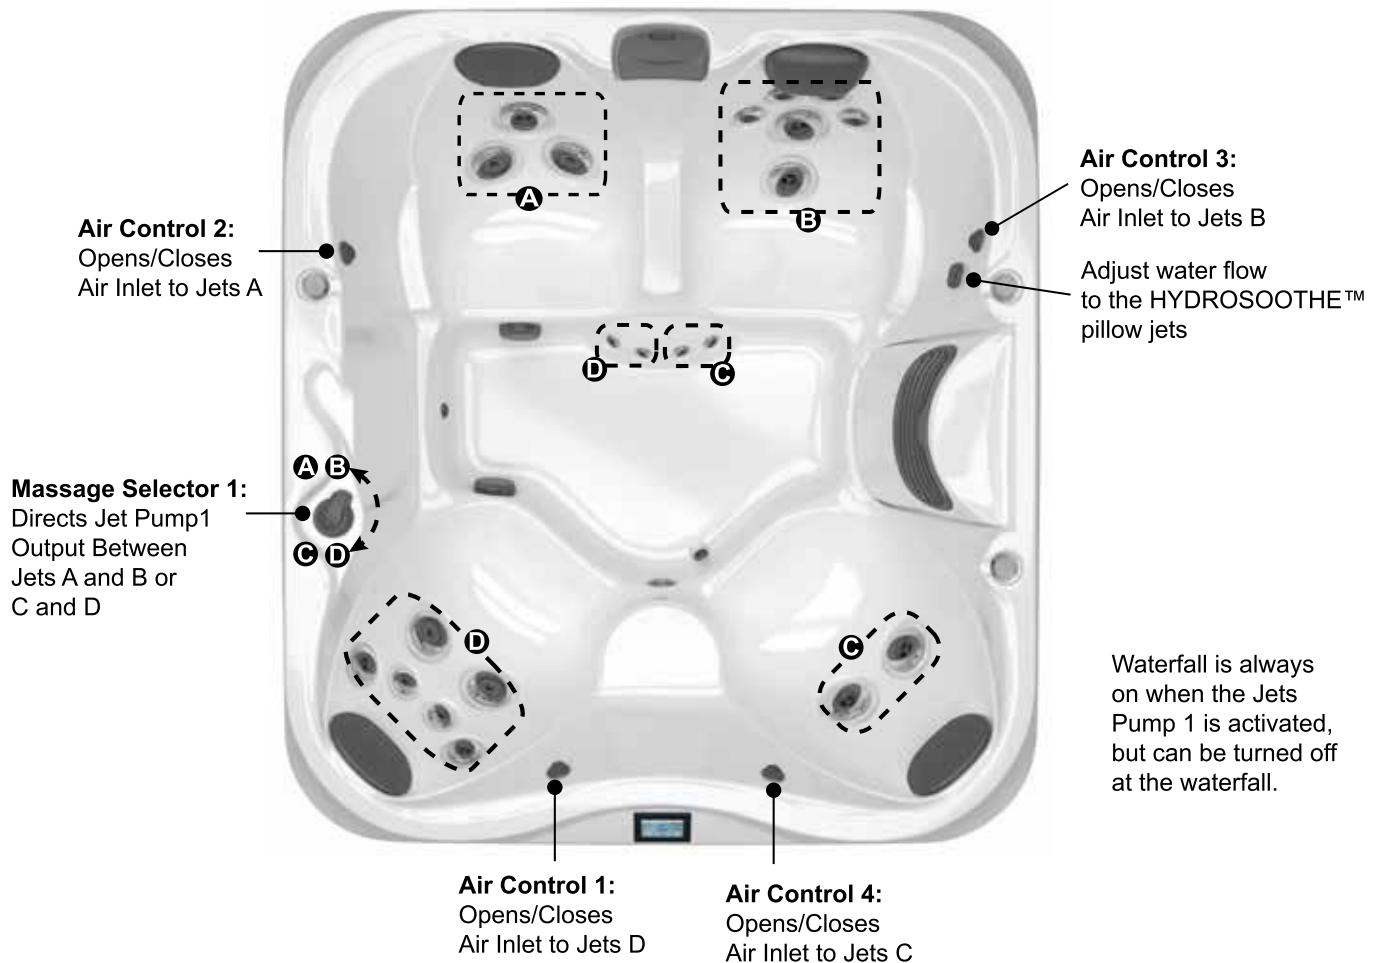

23 Total Jets



Spa Operation Subject to Change without Notice

### Seat Depths

**A = 27.38" (69.5 cm)**

**B = 27.38" (69.5 cm)**

**C = 27.38" (69.5 cm)**


**D = 25.75" (65.4 cm)**

**E = 16.63" (42.2 cm)**

**F = 31.25" (79.4 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat.




Tolerance  $\pm 0.5"$  (1.27 cm).

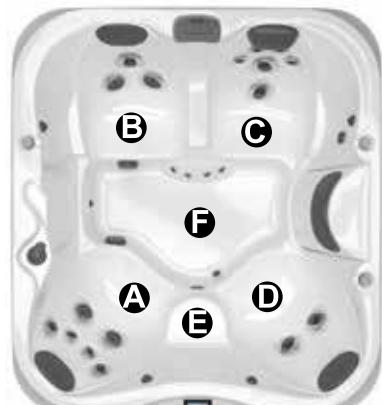

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-325


## Dimensions

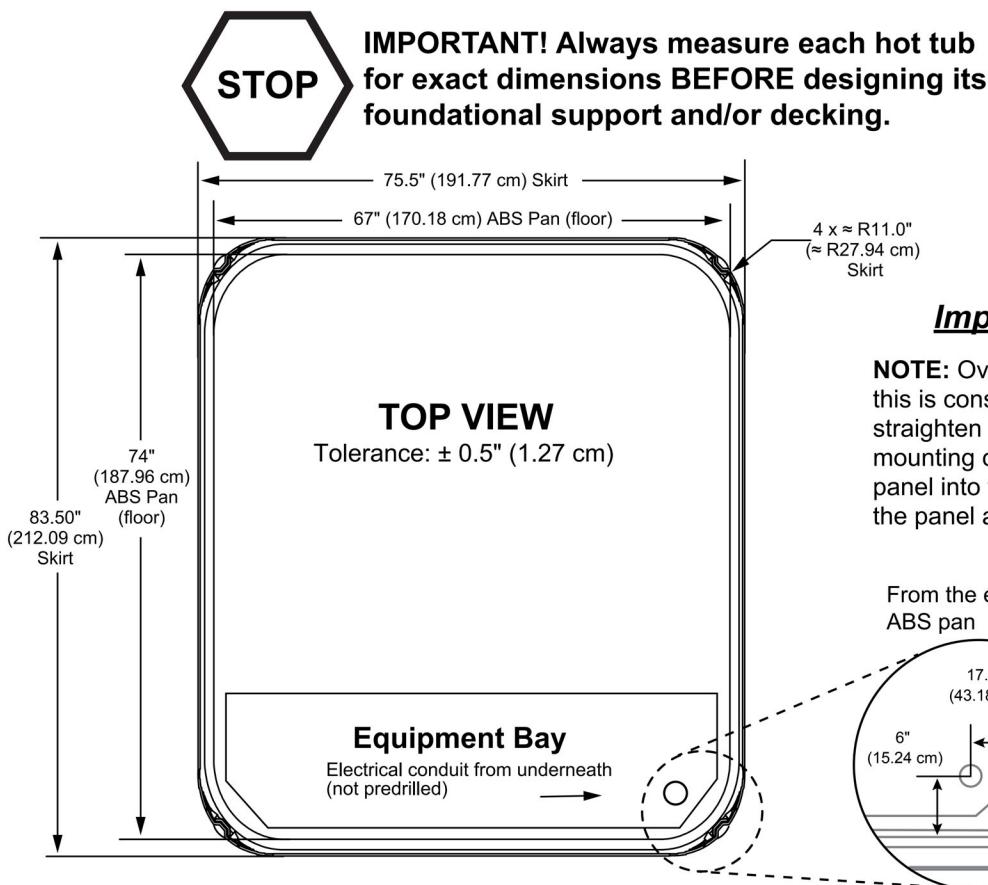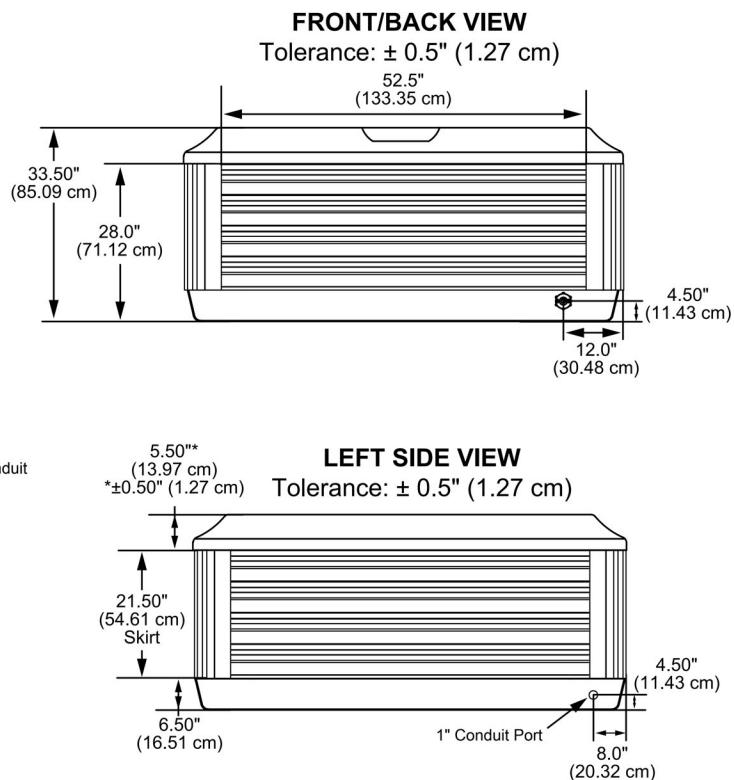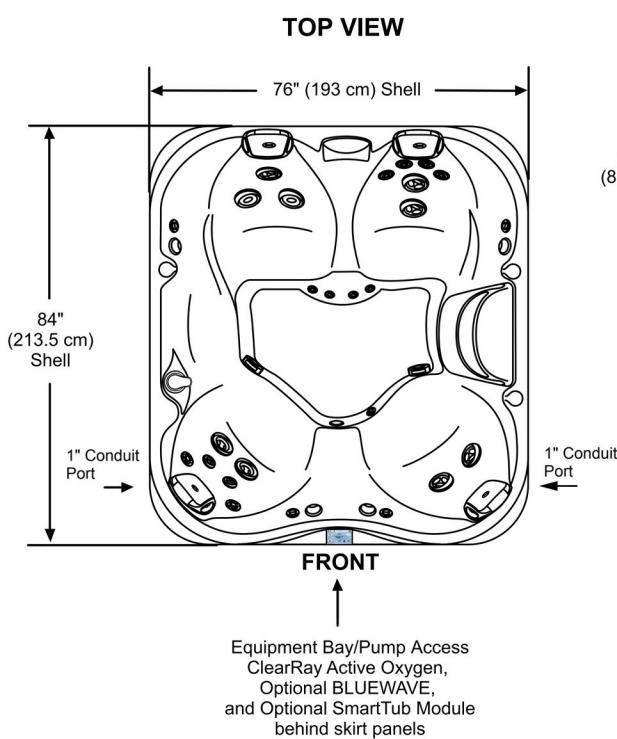

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

From the edge of the ABS pan




Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-315


## Specifications

<b>Seating Capacity</b>	.....2-3 Adults
<b>Dimensions</b>	.....66" x 76" x 31.75" (168 cm x 193 cm x 80.65 cm); <b>For Complete Dimensions, See page 81</b>
<b>Dry Weight</b>	.....531 lbs (241 kg)
<b>Filled Weight (Spa Volume)</b>	.....2,866 lbs (1,300 kg)
<b>Filled Weight (Average Fill)</b>	.....2,282 lbs (1,035 kg)
<b>Water Capacity (Spa Volume)</b>	.....280 US gallons (1,060 Liters)
<b>Water Capacity (Average Fill)</b>	.....210 US gallons (795 Liters)
<b>Electronic Controls</b>	.....Solid state electronic touchscreen controls, programmable temperature, filtration, and heat cycles
<b>Pump 1 (Convertible)</b>	.....North America (60 Hz): 1-Speed, 2.5 HP brake, 1.5 HP continuous, 56 Frame
(3-Wire 240V)	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame
Export (50 Hz):	..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....Yes, 8-hour
<b>Heater (Convertible)</b>	.....North America (60 Hz): 1 kW/4.0 kW Low Flow
(3-Wire 240V)	.....North America (60 Hz): 4.0 kW Low Flow
Export (50 Hz)	..... <b>2.7 kW Low Flow</b>
<b>Total PowerPro® Jets</b>	.....23
<b>Seat A Jets</b>	.....2 PowerPro® FX Rotational, 2 PowerPro® FX
<b>Seat B Jets</b>	.....6 PowerPro® FX, 2 PowerPro® FX Large Rotational, 6 PowerPro® BX
<b>Seat B HYDROSOOTHE™ Jets</b>	.....2 PowerPro® FX Directional with independent flow rate valve
<b>Seat C Jets</b>	.....1 PowerPro® FX Large Rotational, 2 PowerPro® FX Large Rotational
<b>Massage Selectors</b>	.....1
<b>Air Controls</b>	.....3, On/Off rocker style
<b>Water Management System</b>	.....Two 60 ft <sup>2</sup> filter cartridges; filter 1 on 8-hour circulation pump; filter 2 on jets pump 1; Factory installed ClearRay Active Oxygen® System; <b>Optional</b> True™ Water System (Must order with SmartTub® option)
Export (50 Hz):	..... <b>ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....One underwater light with 4 color modes, one colored waterfall light, 2 HYDROSOOTHE pillow lights, and exterior lights
<b>ProFinish™ Cabinet Colors</b>	.....Modern Hardwood, Brushed Gray, and Smoked Ebony
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....3
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the circulation pump
<b>Heater:</b>	.....North America (60 Hz): Convertible: 1kW/4kW; 3-Wire 240V 5.5 kW, High Flow
Export (50 Hz):	..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A North America (60 Hz): 3-Wire 240V@30A, 40A Export (50 Hz): <b>220-240 VAC@1x16A, or 2x16A, or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 1 Year Stereo; <b>Export (50 Hz): 10 Years Shell, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 2 Years Jets, 2 Years Lights, 2 Years Stereo</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module (Must order with the True™ Water System)
<b>Audio System (Optional)</b>	.....BLUEWAVE® Spa Stereo System (Bluetooth/Aux compatible) with four speakers and subwoofer

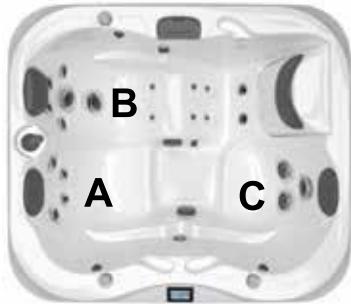

# Jacuzzi J-315

## Operation/Seat Depths

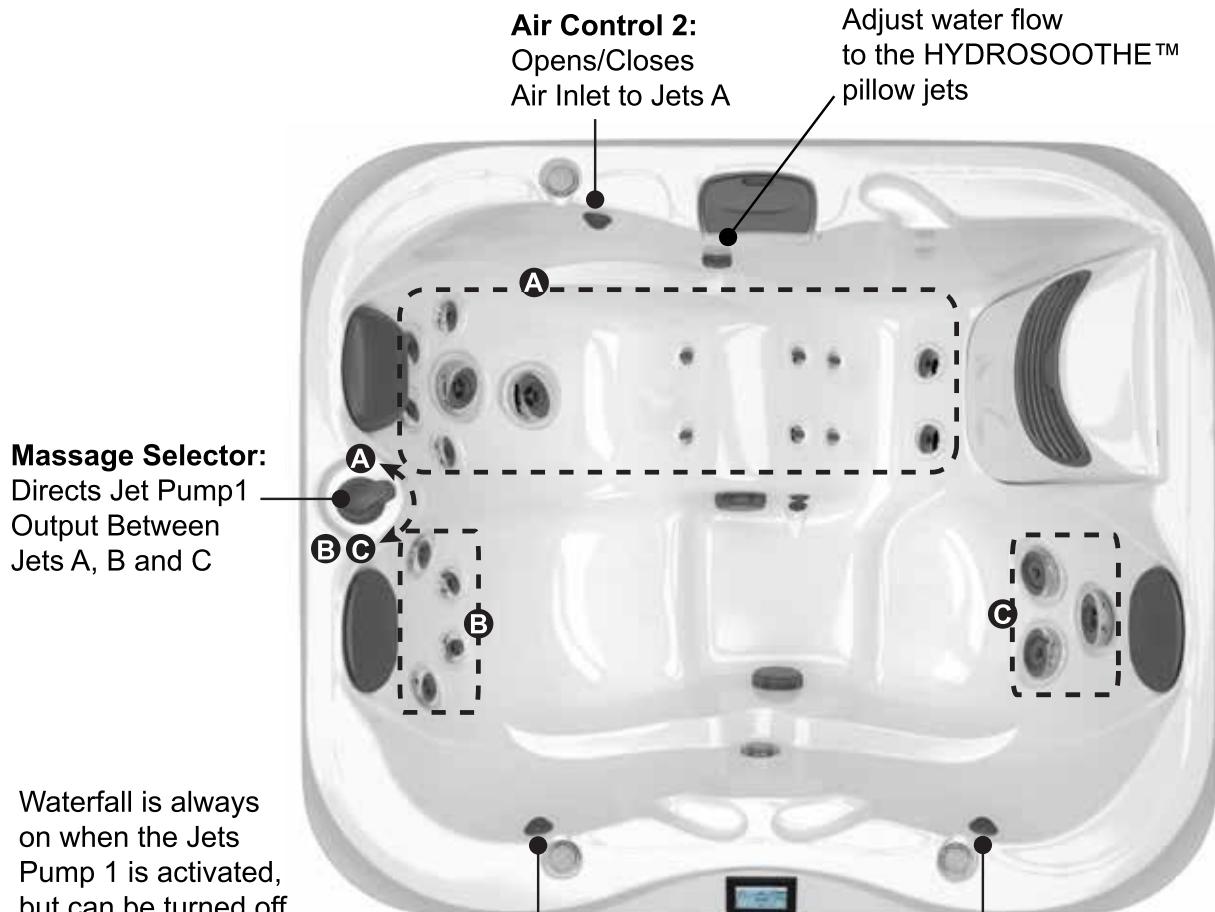

**23 Total Jets**




Spa Operation Subject to Change without Notice

## Seat Depths

- A = 27.50" (69.9 cm)**
- B = 26.25" (66.7 cm)**
- C = 27.88" (70.8 cm)**
- D = 26.75" (69.4 cm)**
- E = 27.50" (69.9 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

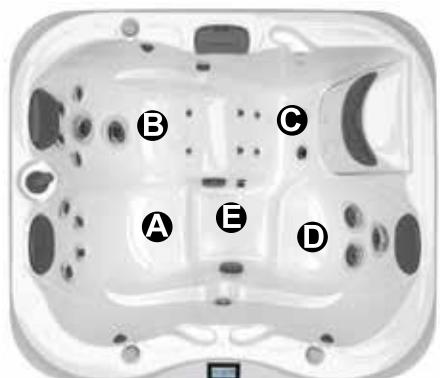


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-315

## Dimensions


**TOP VIEW**

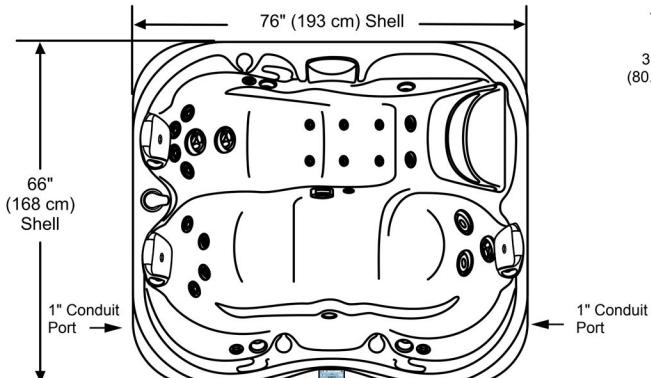


**FRONT**

Equipment Bay/Pump Access  
ClearRay Active Oxygen,  
Optional BLUEWAVE,  
and Optional SmartTub Module  
behind skirt panels

**FRONT/BACK VIEW**

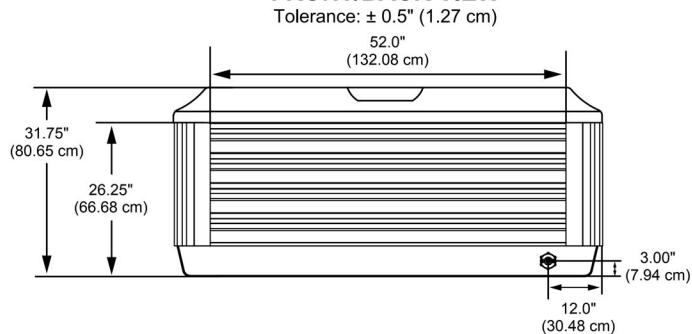

**LEFT SIDE VIEW**

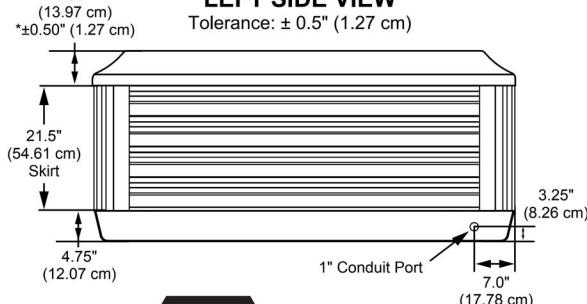


**STOP**

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

### Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal.  
The panels will straighten out when reinstalled into the mounting  
channel. Place one end of the panel into the channel first then flatten  
the panel and insert the other end.

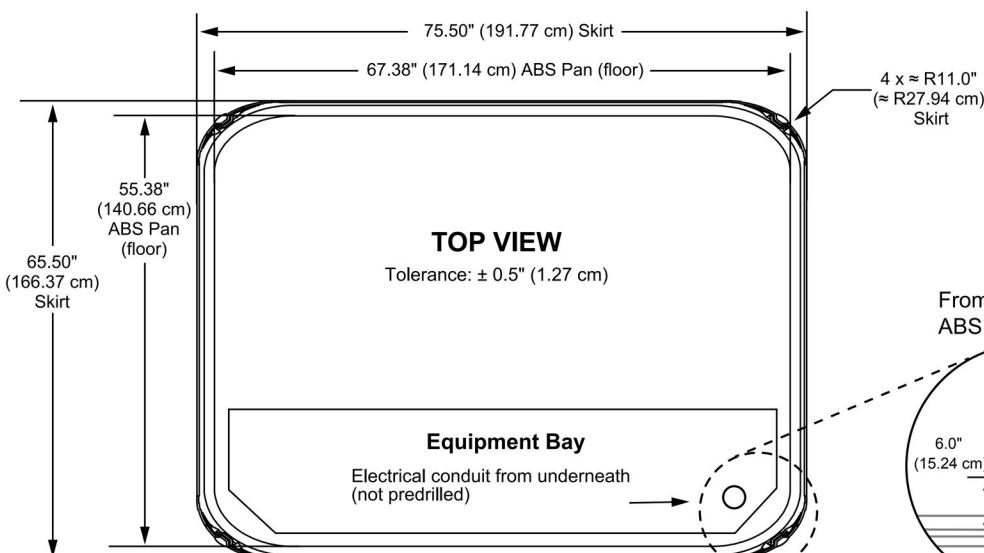


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-285

## Specifications

<b>Seating Capacity</b>	..... 6-7 Adults
<b>Dimensions</b>	..... 89" x 89" x 36" (226 cm x 226 cm x 91 cm); <b>For Complete Dimensions, See page 82</b>
<b>Dry Weight</b>	..... 777 lbs (352 kg)
<b>Filled Weight (Spa Volume)</b>	..... 4,905 lbs (2,225 kg)
<b>Filled Weight (Average Fill)</b>	..... 3,821 lbs (1,733 kg)
<b>Water Capacity (Spa Volume)</b>	... 495 US gallons (1,874 Liters)
<b>Water Capacity (Average Fill)</b>	... 365 US gallons (1,382 Liters)
<b>Electronic Controls</b>	..... Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	..... North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): ..... 2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	..... North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): ..... 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	..... No
<b>Total Jets</b>	..... 42
<b>Seat A Jets</b>	..... 2 SL Directional, 4 SL3R Rotational
<b>Seat B Jets</b>	..... 2 SL5 Directional
<b>Seat C Jets</b>	..... 2 SL Directional, 1 SL3 Directional, 8 SLR Rotational
<b>Seat D Jets</b>	..... 1 SL5 Directional
<b>Seat E Jets</b>	..... 2 SL Directional, 6 SL3 Directional
<b>Seat F Jets</b>	..... 4 SL3R Rotational, 2 SL5R Rotational
<b>Footwell (G)</b>	..... 8 SL Directional
<b>Massage Selectors</b>	..... None
<b>Air Controls</b>	..... 2
<b>Water Management System</b>	..... One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz): ..... ClearRay® UV-C System</b>
<b>LED Lighting</b>	..... LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	..... Smoked, Charcoal
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	..... 4
<b>Waterfall</b>	..... One independent flow rate (on or off) adjustment; powered by the pump 1
<b>Heater:</b>	..... North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): ..... High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	..... North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	..... SmartTub® Module
<b>Audio System (Optional)</b>	..... N/A



# Jacuzzi J-285

## Operation/Seat Depths



Group A Jets are always on when Pump 1 is running.

Group B Jets are always on when Pump 2 is running.

**42 Total Jets**




Spa Operation Subject to Change without Notice

### Seat Depths

**A = 26.00" (66.04 cm)**  
**B = 21.75" (55.25 cm)**  
**C = 25.00" (63.50 cm)**  
**D = 21.63" (54.93 cm)**  
**E = 27.00" (68.58 cm)**  
**F = 18.00" (45.72 cm)**

**G = 23.25" (59.06 cm)**  
**H = 17.25" (43.82 cm)**  
**I = 30.00" (76.20 cm)**

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

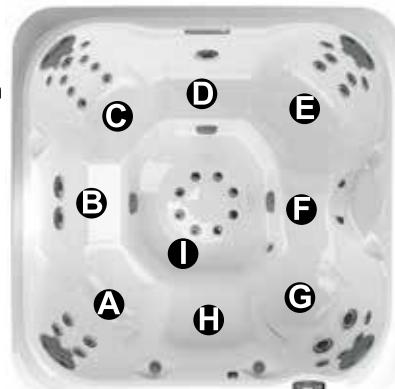


Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-285


## Dimensions

**Top View**

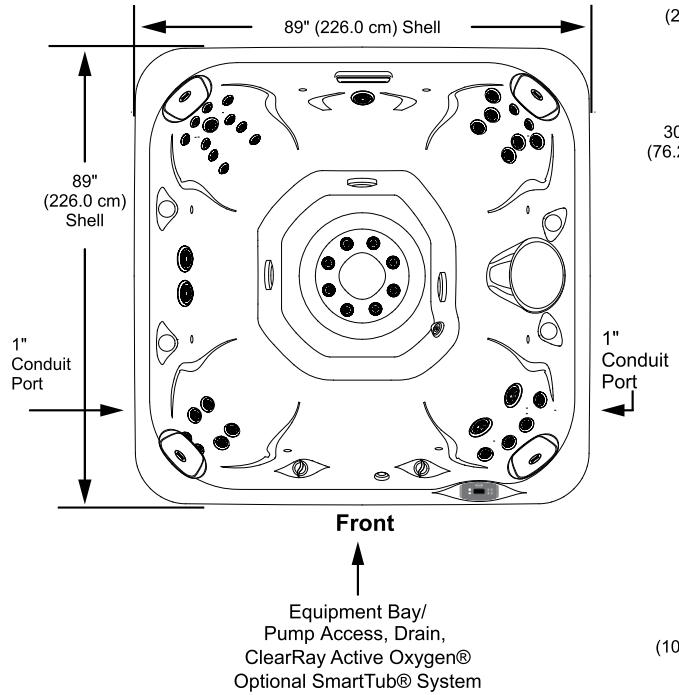


**FRONT VIEW**

Tolerance:  $\pm 0.5"$  (1.27 cm)

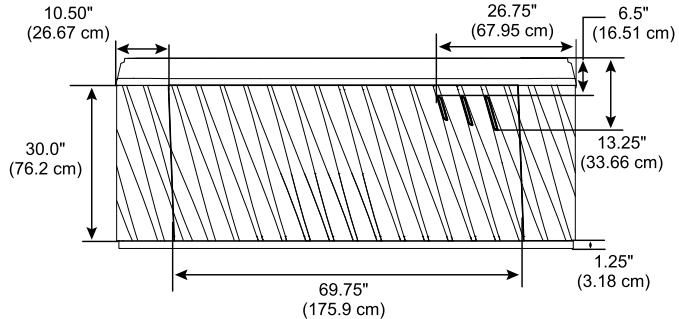

**RIGHT SIDE VIEW**


Tolerance:  $\pm 0.5"$  (1.27 cm)

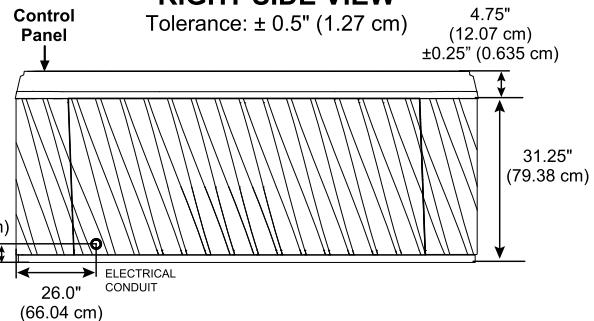

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.



Cabinet Radius:  
≈ 10.0" (20.32 cm)

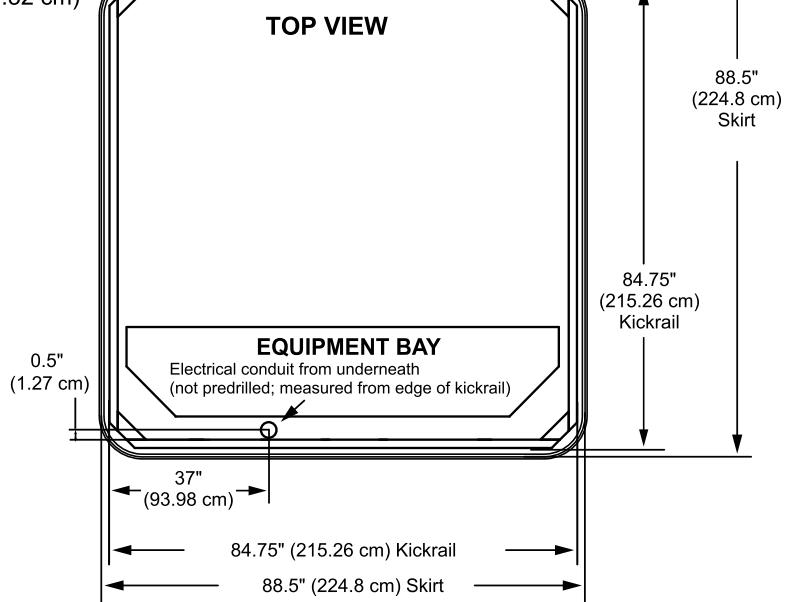


Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-275


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	89" x 89" x 36" (226 cm x 226 cm x 91 cm); For Complete Dimensions, See page 82
<b>Dry Weight</b>	774 lbs (351 kg)
<b>Filled Weight (Spa Volume)</b>	4,861 lbs (2,205 kg)
<b>Filled Weight (Average Fill)</b>	3,776 lbs (1,713 kg)
<b>Water Capacity (Spa Volume)</b>	490 US gallons (1,855 Liters)
<b>Water Capacity (Average Fill)</b>	360 US gallons (1,363 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> <b>2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	No
<b>Total Jets</b>	38
<b>Seat A Jets</b>	4 SL3R Rotational, 2 SL5R Rotational
<b>Seat B Jets</b>	2 SL3R Rotational
<b>Seat C Jets</b>	6 SL Directional, 8 SL3 Directional, 2 SLR Rotational
<b>Seat D Jet</b>	1 SL5 Directional
<b>Seat E Jets</b>	8 SL Directional, 2 SLR Rotational, 1 SL3 Directional
<b>Footwell (F)</b>	2 SL3 Directional
<b>Massage Selectors</b>	None
<b>Air Controls</b>	2
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz):</b> <b>ClearRay® UV-C System</b>
<b>LED Lighting</b>	LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	Smoked, Charcoal
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	3
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow
<b>Waterfall</b>	One independent flow rate (on or off) adjustment; powered by the pump 1 <b>Export (50 Hz):</b> <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz):</b> <b>230 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz):</b> <b>5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	SmartTub® Module
<b>Audio System (Optional)</b>	N/A

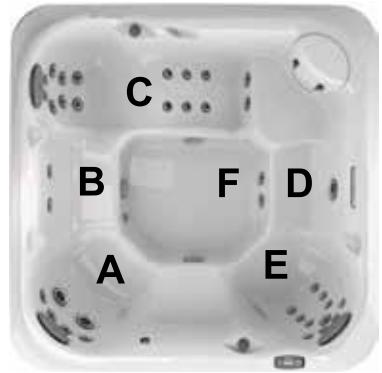

# Jacuzzi J-275

## Operation/Seat Depths

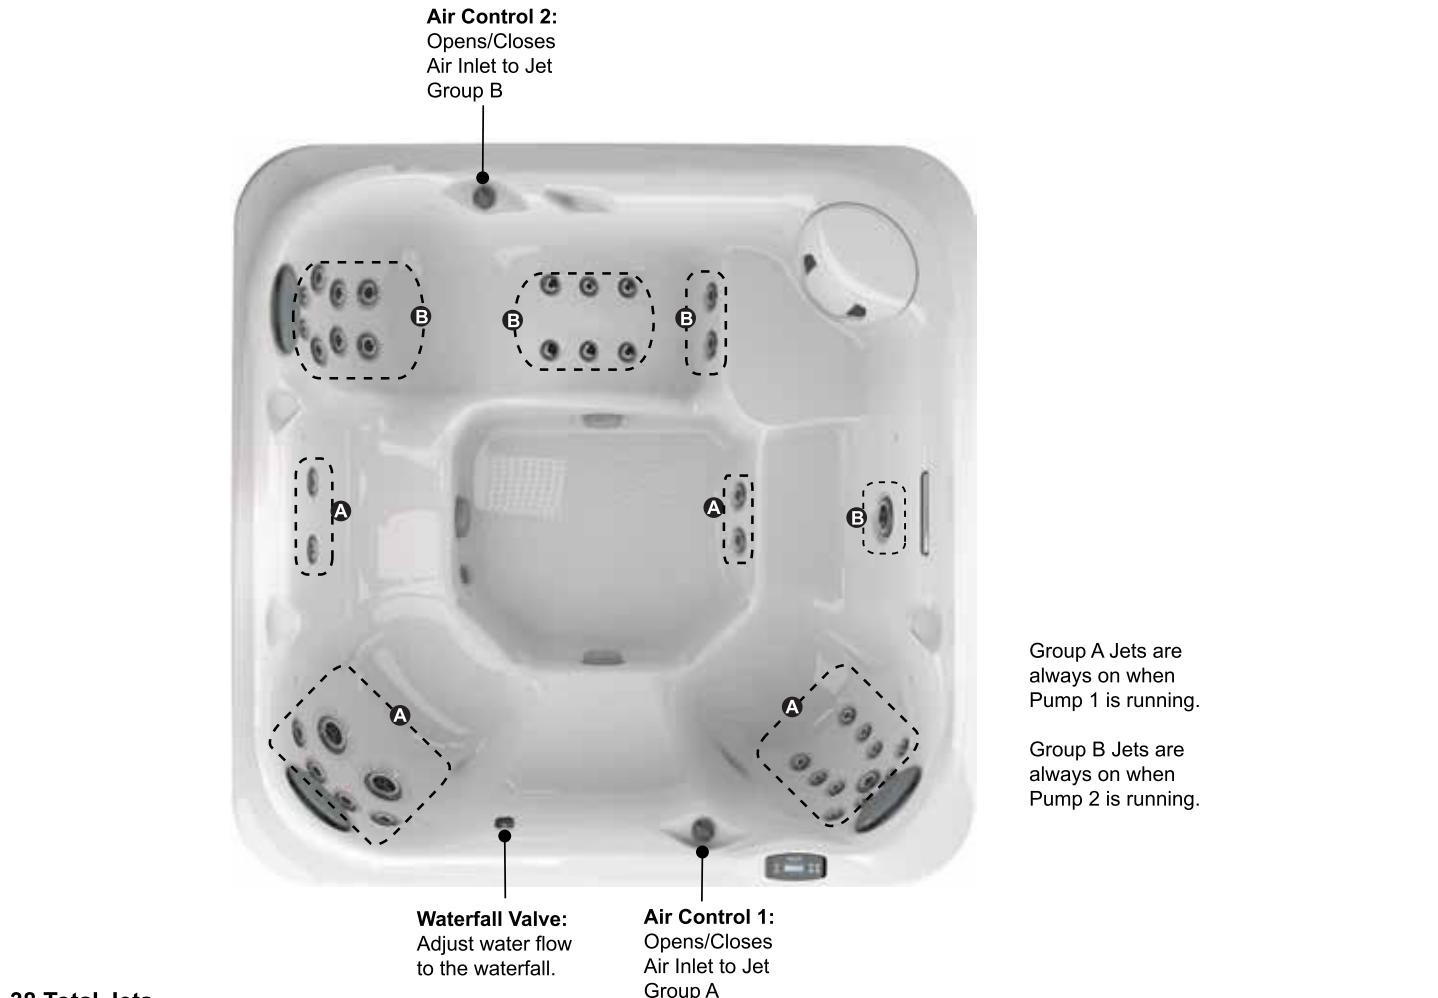


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 24.50"** (62.23 cm)  
**B = 21.50"** (54.61 cm)  
**C = 24.75"** (62.87 cm)  
**D = 25.50"** (64.77 cm)  
**E = 17.50"** (44.45 cm)  
**F = 21.38"** (54.29 cm)

**G = 25.75"** (65.41 cm)  
**H = 17.25"** (43.82 cm)  
**I = 30.00"** (76.20 cm)

Listed dimensions represent distance from top of acrylic to lowest point in seat. Tolerance  $\pm 0.5"$  (1.27 cm).

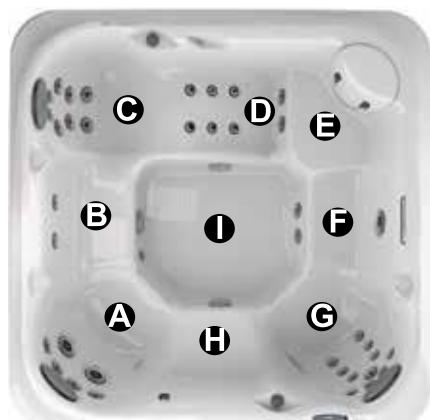


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-275

## Dimensions


**Top View**

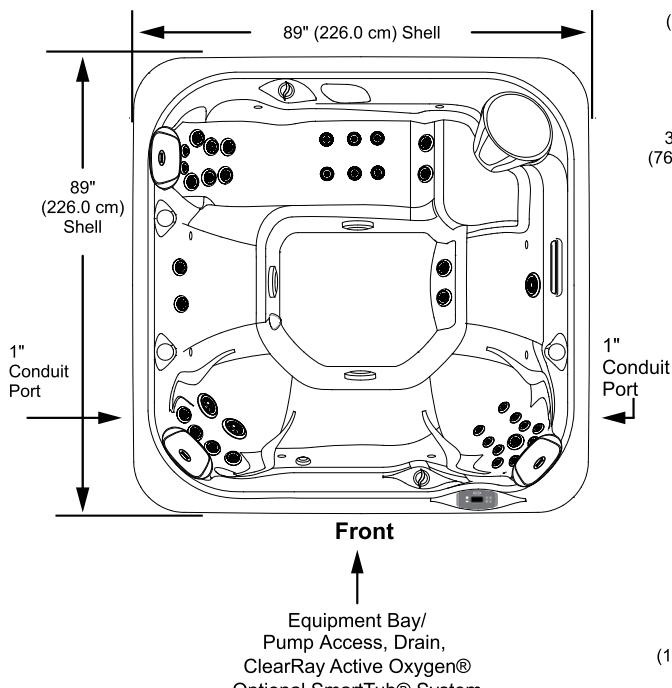

**FRONT VIEW**

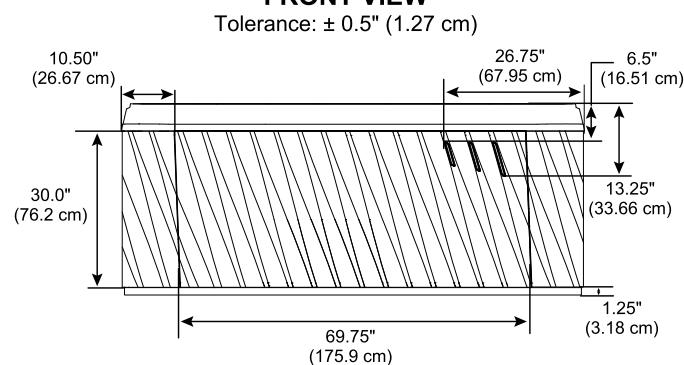

**RIGHT SIDE VIEW**

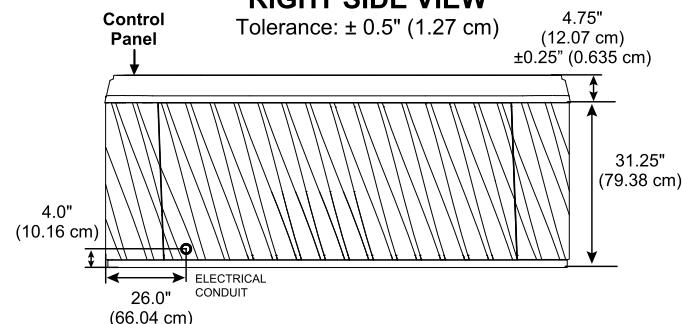


**STOP**

**IMPORTANT! Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.**

**STOP**

Cabinet Radius:  
≈ 10.0" (20.32 cm)

**TOP VIEW**

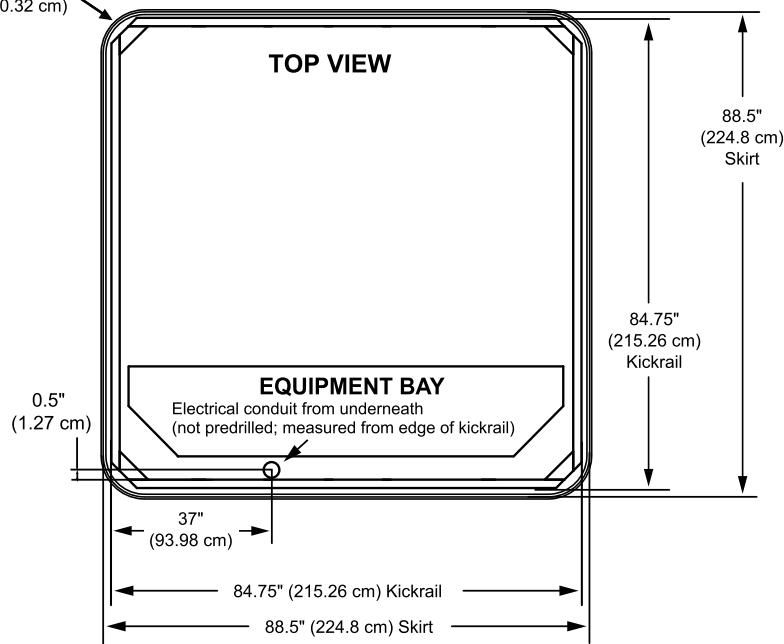

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-245

## Specifications

<b>Seating Capacity</b>	.....6-7 Adults
<b>Dimensions</b>	.....84" x 84" x 36" (213 cm x 213 cm x 91 cm); For Complete Dimensions, See page 82
<b>Dry Weight</b>	.....717 lbs (325 kg)
<b>Filled Weight (Spa Volume)</b>	.....4,345 lbs (1,971 kg)
<b>Filled Weight (Average Fill)</b>	.....3,386 lbs (1,536 kg)
<b>Water Capacity (Spa Volume)</b>	... 435 US gallons (1,647 Liters)
<b>Water Capacity (Average Fill)</b>	... 320 US gallons (1,211 Liters)
<b>Electronic Controls</b>	.....Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	.....North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	.....North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz):</b> ..... <b>1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	.....No
<b>Total Jets</b>	.....37
<b>Seat A</b>	.....2 SL Directional, 8 SLR Rotational, 1 SL3 Directional
<b>Seat B</b>	.....1 SL3R Rotational
<b>Seat C</b>	.....2 SL Directional, 6 SL3 Directional
<b>Seat D</b>	.....2 SL3R Rotational
<b>Seat E</b>	.....2 SL3 Directional, 1 SL5R Rotational
<b>Seat F</b>	.....2 SL Directional, 4 SL3R Rotational
<b>Footwell (G)</b>	.....4 SL Directional
<b>Massage Selectors</b>	.....None
<b>Air Controls</b>	.....2
<b>Water Management System</b>	.....One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz):</b> ..... <b>ClearRay® UV-C System</b>
<b>LED Lighting</b>	.....LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	.....Smoked, Charcoal
<b>Acrylic Colors</b>	.....Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	.....4
<b>Waterfall</b>	.....One independent flow rate (on or off) adjustment; powered by the pump 1
<b>Heater:</b>	.....North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz):</b> ..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	.....North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz):</b> <b>220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual)</b> <b>or suitably rated circuit breaker to comply with local electrical codes.</b> <b>Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	.....North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	.....SmartTub® Module
<b>Audio System (Optional)</b>	.....N/A



# Jacuzzi J-245

## Operation/Seat Depths



Air Control 1:  
Opens/Closes  
Air Inlet to Jet  
Group A

Waterfall Valve:  
Adjust water flow  
to the waterfall.

Air Control 2:  
Opens/Closes  
Air Inlet to Jet  
Group B

SL Jets (10)

SLR Jets (8)

SL3 Jets (10)

SL3R Jets (8)

SL5R Jet (1)

Group A Jets are  
always on when  
Pump 1 is running.

Group B Jets are  
always on when  
Pump 2 is running.


Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.88" (65.72 cm)**  
**B = 20.63" (52.39 cm)**  
**C = 26.75" (67.95 cm)**  
**D = 21.63" (54.93 cm)**  
**E = 24.63" (62.55 cm)**  
**F = 18.25" (46.36 cm)**

**G = 23.38" (59.37 cm)**  
**H = 17.13" (43.50 cm)**  
**I = 30.00" (76.20 cm)**


Listed dimensions  
represent distance from  
top of acrylic to lowest  
point in seat. Tolerance  
 $\pm 0.5"$  (1.27 cm).

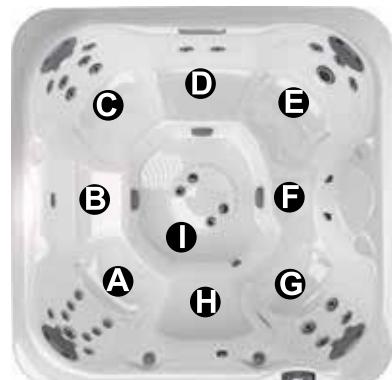

Dimensions/Specifications are Subject to Change Without Notice

# Jacuzzi J-245


## Dimensions

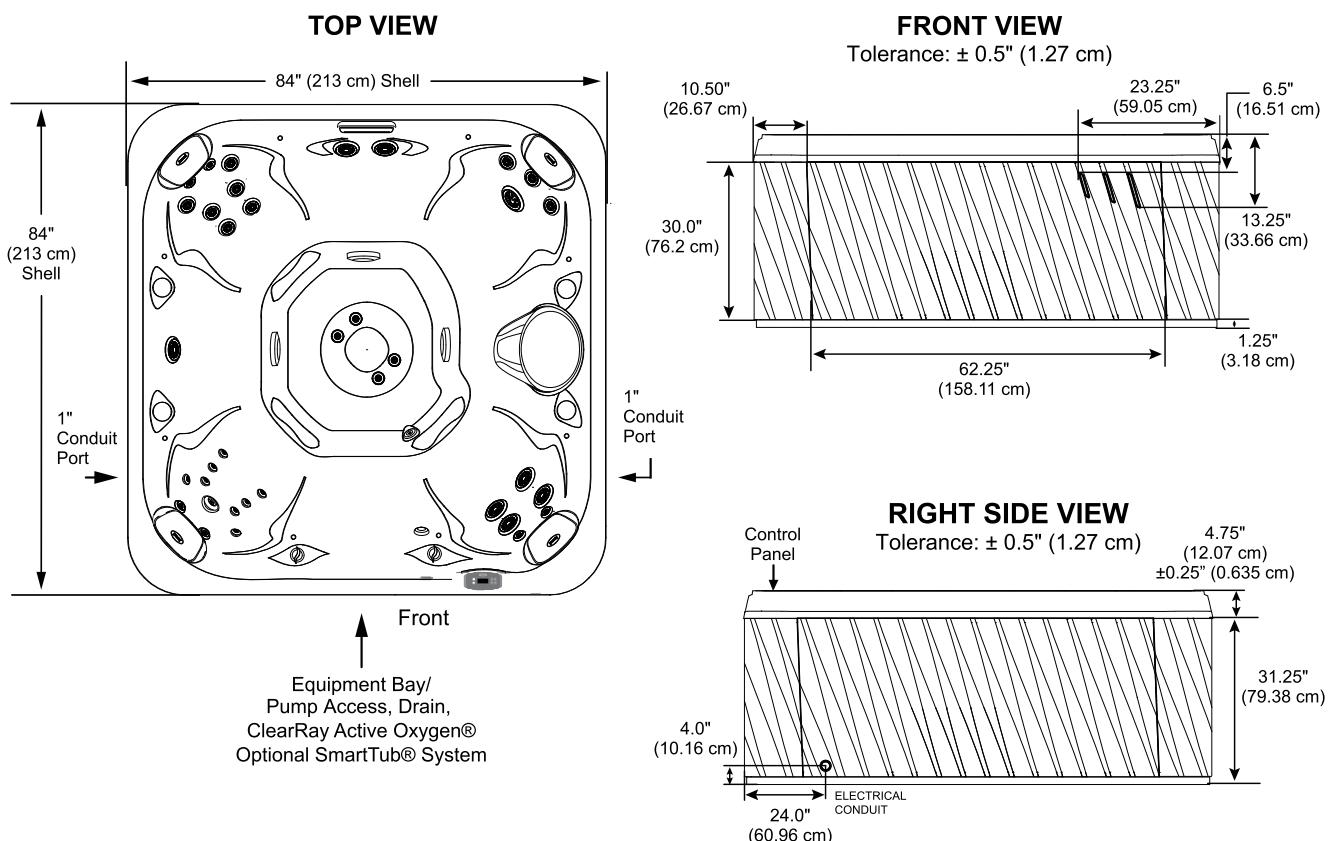

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.



Cabinet Radius:  
 $\approx 10.0"$  (25.4 cm)

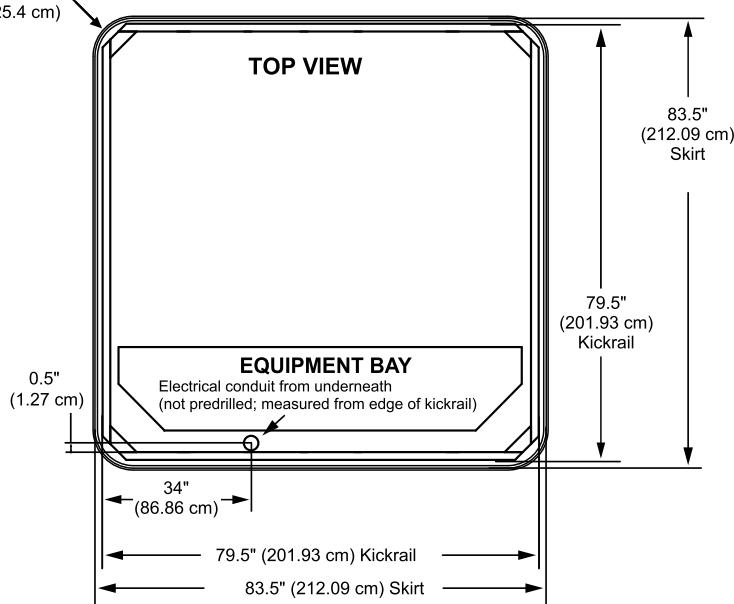


Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Jacuzzi J-235

## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	84" x 84" x 36" (213 cm x 213 cm x 91 cm); <b>For Complete Dimensions, See page 82</b>
<b>Dry Weight</b>	726 lbs (329 kg)
<b>Filled Weight (Spa Volume)</b>	4,229 lbs (1,918 kg)
<b>Filled Weight (Average Fill)</b>	3,270 lbs (1,483 kg)
<b>Water Capacity (Spa Volume)</b>	420 US gallons (1,590 Liters)
<b>Water Capacity (Average Fill)</b>	305 US gallons (1,155 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 4.5 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>
<b>Pump 2</b>	North America (60 Hz): 1-Speed, 4.8 HP brake, 2.5 HP continuous, 56 Frame <b>Export (50 Hz): 1-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	No
<b>Total Jets</b>	34
<b>Seat A Jets</b>	4 SL3R Rotational, 2 SL5R Rotational
<b>Seat B Jets</b>	2 SL3R Rotational
<b>Seat C Jets</b>	2 SLR Rotational, 2 SL Directional, 8 SL3 Directional
<b>Seat D Jet</b>	1 SL3R Rotational
<b>Seat E Jets</b>	2 SLR Rotational, 8 SL Directional, 1 SL3 Directional
<b>Footwell (G)</b>	2 SL3 Directional
<b>Massage Selectors</b>	None
<b>Air Controls</b>	2
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	Smoked, Charcoal
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	3
<b>Waterfall</b>	One independent flow rate (on or off) adjustment; powered by the pump 1
<b>Heater:</b>	North America (60 Hz): 5.5 kW, High Flow <b>Export (50 Hz): High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 240 VAC@40A, 50A or 60A <b>Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	SmartTub® Module
<b>Audio System (Optional)</b>	N/A

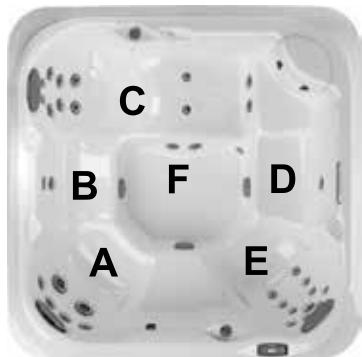

# Jacuzzi J-235

## Operation/Seat Depths



Group A Jets are always on when Pump 1 is running.

Group B Jets are always on when Pump 2 is running.

**34 Total Jets**



SL Jets (6)



SLR Jets (8)



SL3 Jets (11)



SL3R Jets (7)



SL5R Jets (2)

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 23.25" (59.06 cm)**

**B = 20.75" (52.71 cm)**

**C = 24.88" (63.18 cm)**

**D = 25.50" (64.77 cm)**

**E = 17.50" (44.45 cm)**

**F = 21.50" (54.61 cm)**


**G = 25.63" (65.09 cm)**

**H = 17.00" (43.18 cm)**

**I = 30.00" (76.20 cm)**

Listed dimensions

represent distance from  
top of acrylic to lowest  
point in seat. Tolerance  
 $\pm 0.5"$  (1.27 cm).

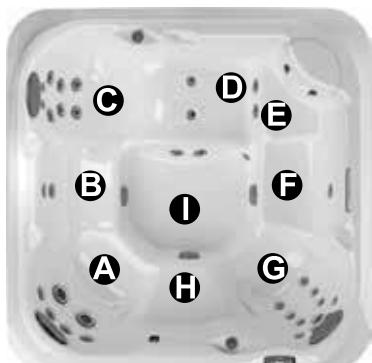


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-235

## Dimensions


**TOP VIEW**

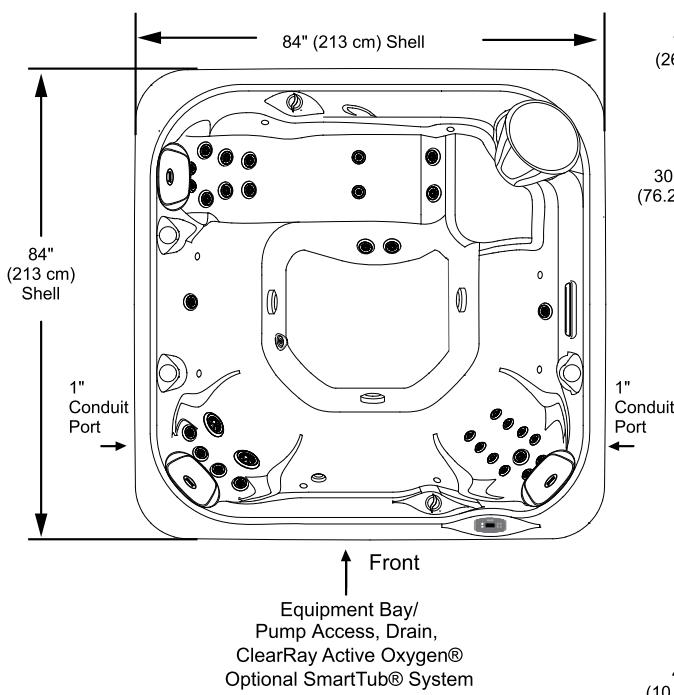

**FRONT VIEW**

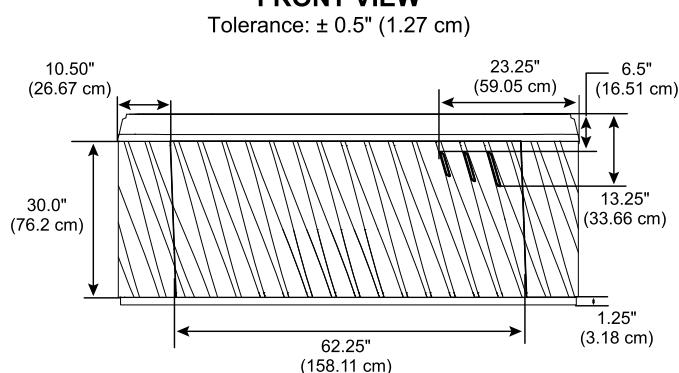

**RIGHT SIDE VIEW**

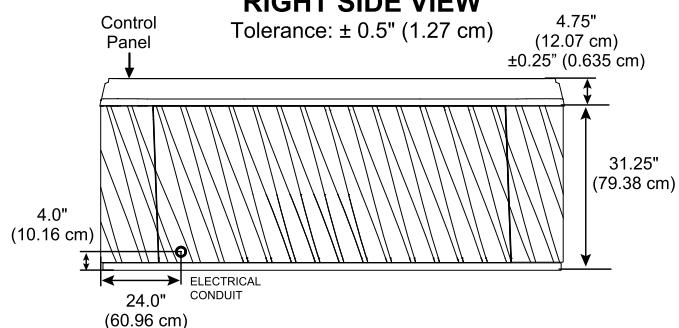


**STOP**

**IMPORTANT! Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.**

**STOP**

Cabinet Radius:  
≈ 10.0" (25.4 cm)

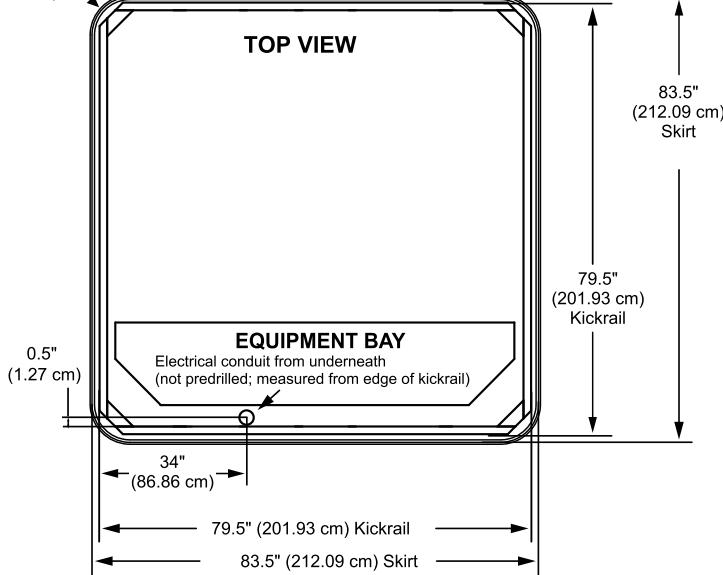

Dimensions/specifications subject to change without notice. Tolerance: ± 0.5" (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-225

## Specifications

<b>Seating Capacity</b>	4-5 Adults
<b>Dimensions</b>	80" x 80" x 33" (203 cm x 203 cm x 84 cm); <b>For Complete Dimensions, See page 82</b>
<b>Dry Weight</b>	619 lbs (281 kg)
<b>Filled Weight (Spa Volume)</b>	3,805 lbs (1,726 kg)
<b>Filled Weight (Average Fill)</b>	2,954 lbs (1,340 kg)
<b>Water Capacity (Spa Volume)</b>	382 US gallons (1,446 Liters)
<b>Water Capacity (Average Fill)</b>	280 US gallons (1,060 Liters)
<b>Electronic Controls</b>	Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame <b>Export (50 Hz): 2-Speed, 2.0 HP continuous</b>
<b>Circulation Pump</b>	No
<b>Total Jets</b>	26
<b>Seat A Jets</b>	3 SL3 Directional, 1 SL5R Rotational
<b>Seat B Jets</b>	1 SLR Rotational, 1 SL3 Directional, 8 SL Directional
<b>Seat C Jet</b>	1 SL3R Rotational
<b>Seat D Jets</b>	6 SL3 Directional
<b>Seat E Jets</b>	4 SL3R Rotational
<b>Massage Selectors</b>	None
<b>Air Controls</b>	2
<b>Water Management System</b>	One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz): ClearRay® UV-C System</b>
<b>LED Lighting</b>	LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	Smoked, Charcoal
<b>Acrylic Colors</b>	Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	4
<b>Heater:</b>	North America (60 Hz): 120V 1kW or 240V 4.0 kW, High Flow
<b>Export (50 Hz):</b>	<b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A <b>Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	SmartTub® Module
<b>Audio System (Optional)</b>	N/A



# Jacuzzi J-225

## Operation/Seat Depths



Jets are always on when the Jets Pump 1 is running.

**Air Control 1:**  
Opens/Closes  
Air Inlet to Jet  
Group A

**Air Control 2:**  
Opens/Closes  
Air Inlet to Jet  
Group B

26 Total Jets



SL Jets (8)



SLR Jets (2)



SL3 Jets (10)



SL3R Jets (5)



SL5R Jets (1)

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 23.50" (59.69 cm)**

**F = 21.50" (54.61 cm)**

Listed dimensions  
represent distance from  
top of acrylic to lowest  
point in seat. Tolerance  
 $\pm 0.5"$  (1.27 cm).

**B = 21.00" (53.34 cm)**

**G = 26.00" (66.04 cm)**

**C = 27.25" (69.22 cm)**

**H = 17.50" (44.45 cm)**

**D = 21.88" (55.56 cm)**

**I = 28.00" (71.12 cm)**

**E = 23.88" (60.64 cm)**




Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-225

## Dimensions


**TOP VIEW**

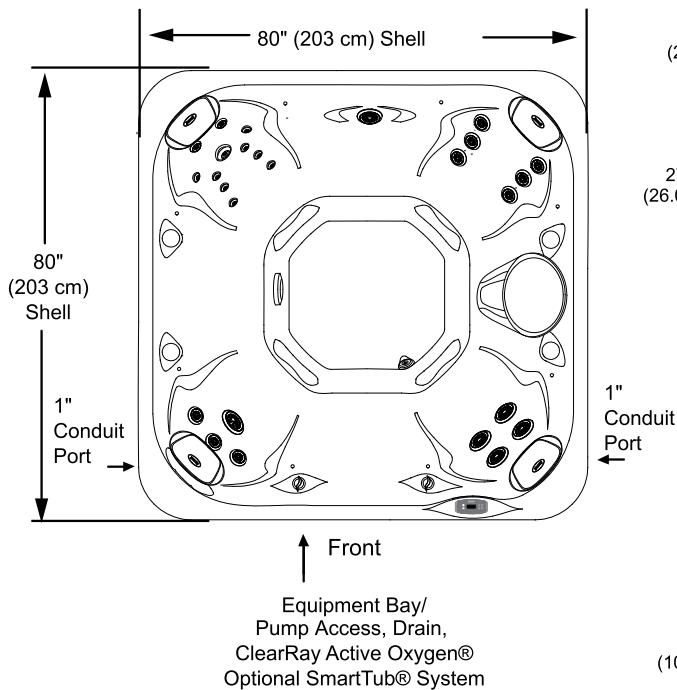

**FRONT VIEW**

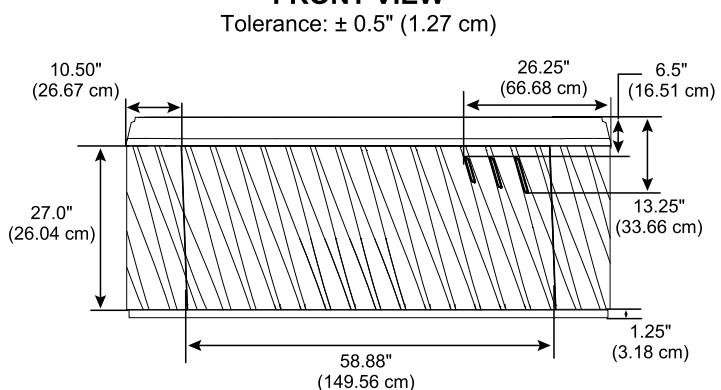

**RIGHT SIDE VIEW**

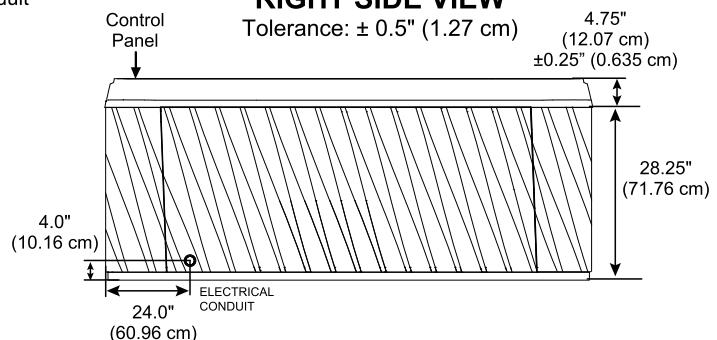


**STOP**

**IMPORTANT! Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.**

**STOP**

Cabinet Radius:  
≈ 10.0" (25.4 cm)

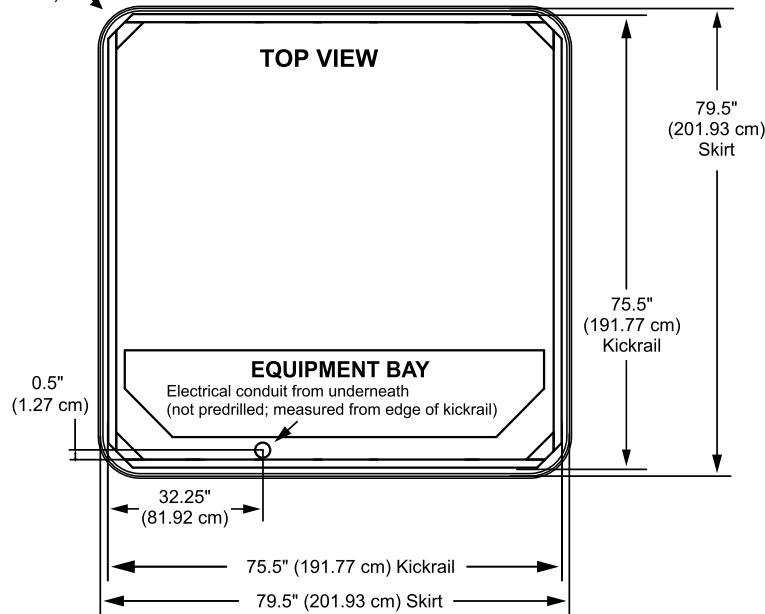


Dimensions/specifications subject to change without notice. Tolerance ±0.5" (1.27 cm)

# Jacuzzi J-215

## Specifications

<b>Seating Capacity</b>	..... 2-3 Adults
<b>Dimensions</b>	..... 69" x 80" x 33" (175 cm x 203 cm x 84 cm); <b>For Complete Dimensions, See page 82</b>
<b>Dry Weight</b>	..... 517 lbs (235 kg)
<b>Filled Weight (Spa Volume)</b>	..... 2,936 lbs (1,332 kg)
<b>Filled Weight (Average Fill)</b>	..... 2,251 lbs (1,021 kg)
<b>Water Capacity (Spa Volume)</b>	... 290 US gallons (1,098 Liters)
<b>Water Capacity (Average Fill)</b>	... 205 US gallons (776 Liters)
<b>Electronic Controls</b>	..... Solid state electronic controls with LED readout, programmable temperature, filtration, and heat cycles
<b>Pump 1</b>	..... North America (60 Hz): 2-Speed, 2.5 HP brake, 1.5 HP continuous, 48 Frame <b>Export (50 Hz): ..... 2-Speed, 2.0 HP continuous on the completes</b>
<b>Circulation Pump</b>	..... No
<b>Total Jets</b>	..... 21
<b>Seat A Jets</b>	..... 6 SLR Rotational
<b>Seat B Jets</b>	..... 1 SLR Rotational, 8 SL Directional
<b>Seat C Jets</b>	..... 4 SL3R Rotational
<b>Footwell (D) Jets</b>	..... 2 SLR Rotational
<b>Massage Selectors</b>	..... None
<b>Air Controls</b>	..... 1
<b>Water Management System</b>	..... One 50 ft <sup>2</sup> filter cartridge on jets pump 1, ClearRay Active Oxygen® System <b>Export (50 Hz): ..... ClearRay® UV-C System</b>
<b>LED Lighting</b>	..... LED Lighting System (Interior Surround); Standard Exterior Light
<b>Cabinet Colors</b>	..... Smoked, Charcoal
<b>Acrylic Colors</b>	..... Platinum, Silver Pearl, Monaco, Midnight, Porcelain (while quantities last)
<b>Headrests</b>	..... 3
<b>Heater:</b>	..... North America (60 Hz): 120V 1kW or 240V 4.0 kW, High Flow
<b>Export (50 Hz):</b>	..... <b>High Flow, 2.7 kW</b>
<b>Electrical Requirements:</b>	..... North America (60 Hz): 120V@15A (GFCI cord) 240 VAC@30A or 40A <b>Export (50 Hz): 220-240 VAC@1x16A, 1x32A or 2 out of 3-phase (see manual) or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs; two GFCI RCD breakers are required for this configuration.</b>
<b>Warranty*</b>	..... North America (60 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls; 1 Year Cabinet, 1 Year Jets <b>Export (50 Hz): 5 Years Shell, 3 Years Shell Surface, 3 Years Plumbing Component Leaks, 3 Years Equipment and Controls, 1 Year Cabinet, 1 Year Jets</b>
<b>Special Features (Optional)</b>	..... SmartTub® Module
<b>Audio System (Optional)</b>	..... N/A

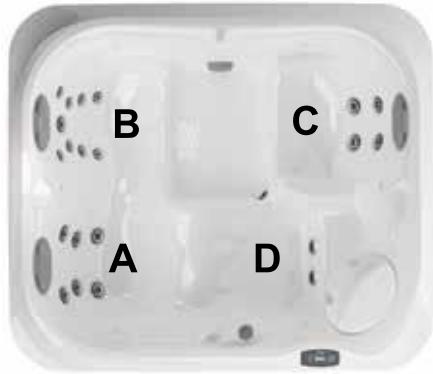

# Jacuzzi J-215

## Operation/Seat Depths



Air Control 1:  
Opens/Closes  
Air Inlet to Jets A

Jets are always on  
when the Jets Pump 1  
is running.

21 Total Jets



SL Jets (8)



SLR Jets (9)



SL3R Jets (4)

Spa Operation Subject to Change without Notice

## Seat Depths

**A = 25.13" (63.82 cm)**

**D = 18.00" (45.72 cm)**


Listed dimensions  
represent distance from  
top of acrylic to lowest  
point in seat. Tolerance  
 $\pm 0.5"$  (1.27 cm).

**B = 26.00" (66.04 cm)**

**E = 25.75" (65.41 cm)**

**C = 23.50" (59.69 cm)**

**F = 27.63" (70.17 cm)**

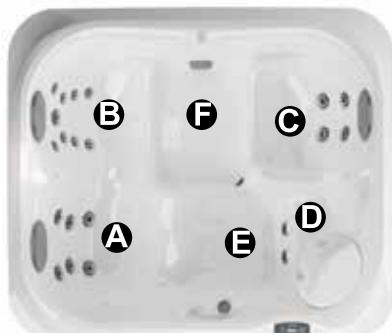


Dimensions/Specifications are Subject to Change Without Notice


# Jacuzzi J-215

## Dimensions


**TOP VIEW**

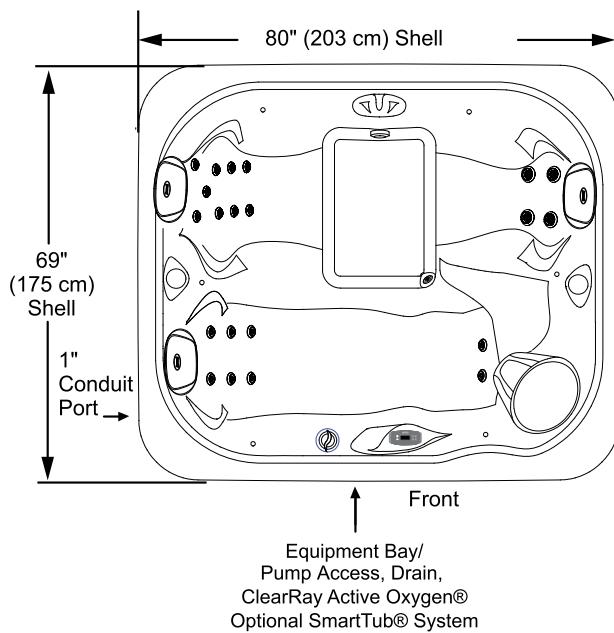

**FRONT VIEW**

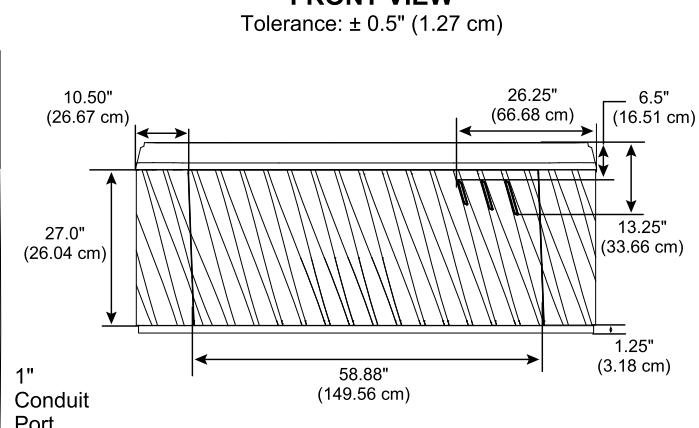


**RIGHT SIDE VIEW**

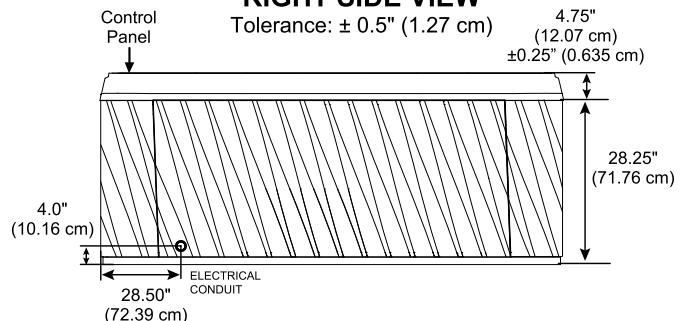

**STOP**

**IMPORTANT!** Always measure each hot tub  
for exact dimensions BEFORE designing its  
foundational support and/or decking.

**STOP**

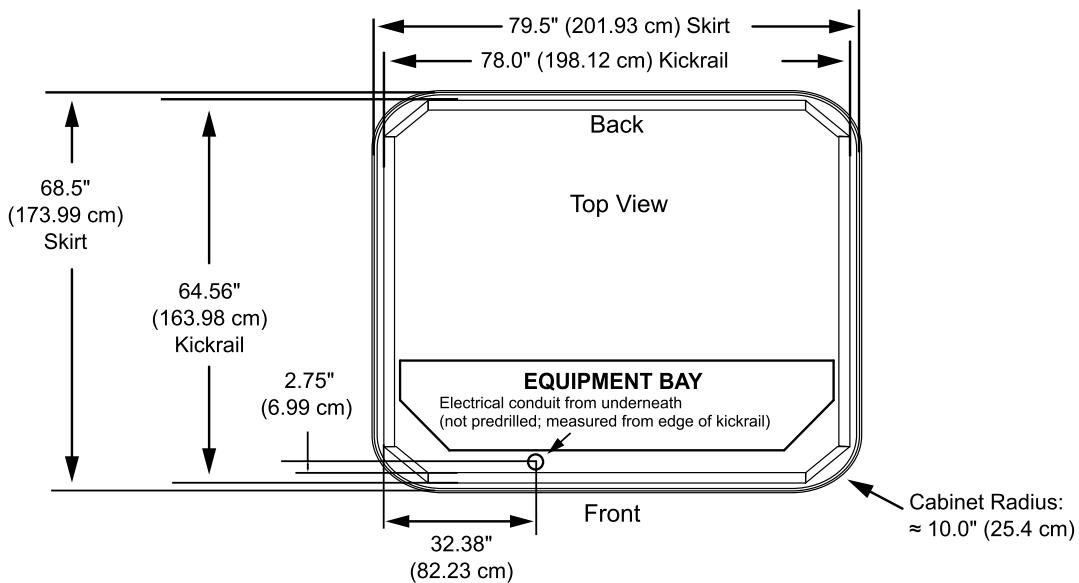


Dimensions/specifications subject to change without notice. Tolerance:  $\pm 0.5"$  (1.27 cm)

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Soul 30™ Jets


## Specifications

<b>Seating Capacity</b>	6 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Filled Weight (Spa Volume)</b>	3,864 lbs (1,753 kg)
<b>Filled Weight (Average Fill)</b>	2,971 lbs (1,348 kg)
<b>Water Capacity (Spa Volume)</b>	417 US gallons (1,579 Liters)
<b>Water Capacity (Average Fill)</b>	310 US gallons (1,173 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2 kW, 2-Speed
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	30
<b>Seat A Jets</b>	6 DirectionalMax1, 6 DirectionalMax2
<b>Seat B Jets</b>	1 DirectionalMax1
<b>Seat C Jets</b>	6 DirectionalMax2
<b>Seat D Jets</b>	2 DirectionalMax1
<b>Seat E Jets</b>	4 DirectionalMax1, 2 DirectionalMax2
<b>Seat F Jets</b>	1 DirectionalMax1
<b>Footwell (G)</b>	2 DirectionalMax1
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle and Glacier Sparkle
<b>Headrests</b>	3
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A <b>Export (50 Hz):</b> 220-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; <b>Export (50 Hz):</b> 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
<b>Special Features</b>	Optional Suite Package Add-On

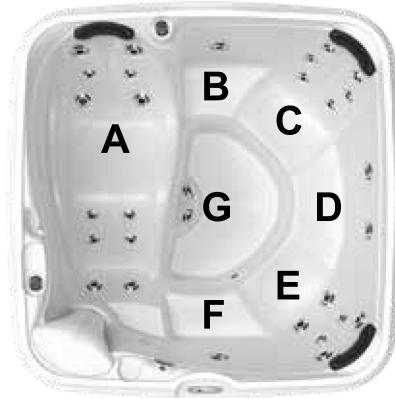

# Soul 30 Jets

## Operation/Seat Depths

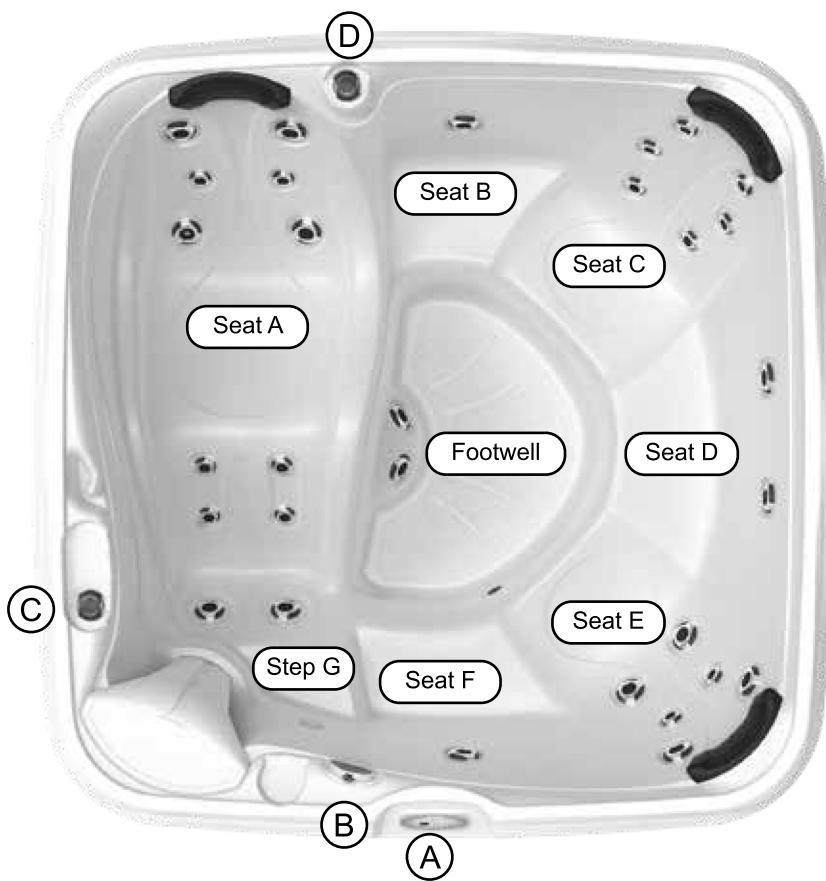

### 30 Total Jets

DirectionalMax1  
Jets (16)

DirectionalMax2  
Jets (14)



Spa Operation Subject to Change without Notice

**A = 25.75" (65.40 cm)**

**B = 24.50" (62.23 cm)**

**C = 28.00" (71.12 cm)**

**D = 24.75" (62.86 cm)**

**E = 26.50" (67.30 cm)**


**F = 23.25" (59.06 cm)**

**G = 19.00" (48.26 cm)**

**H = 34.50" (87.63 cm)**

### Seat Depths


Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)

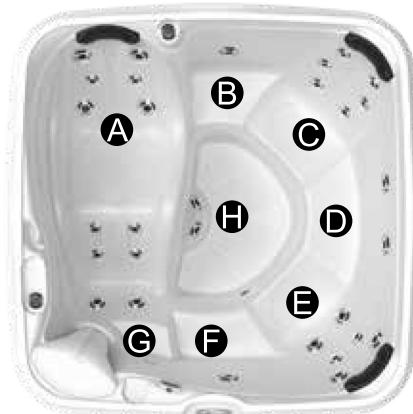




Dimensions/Specifications are Subject to Change Without Notice

# Soul 30 Jets

## Dimensions

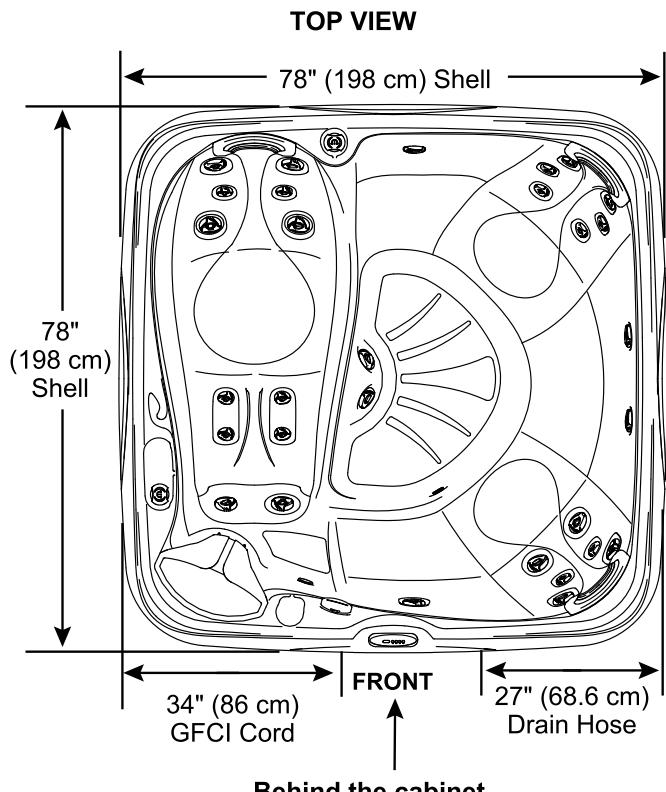

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

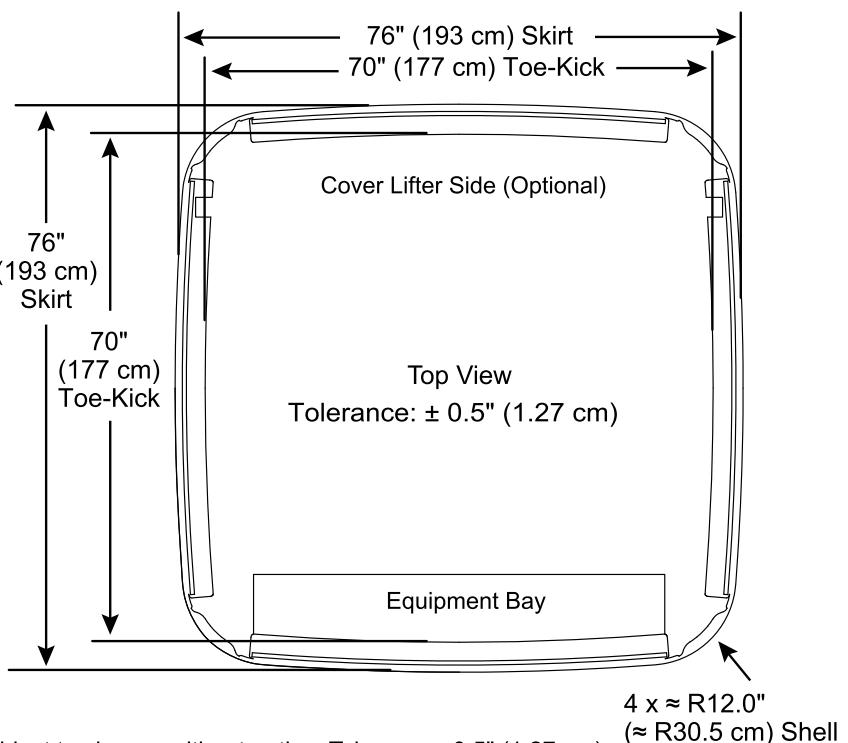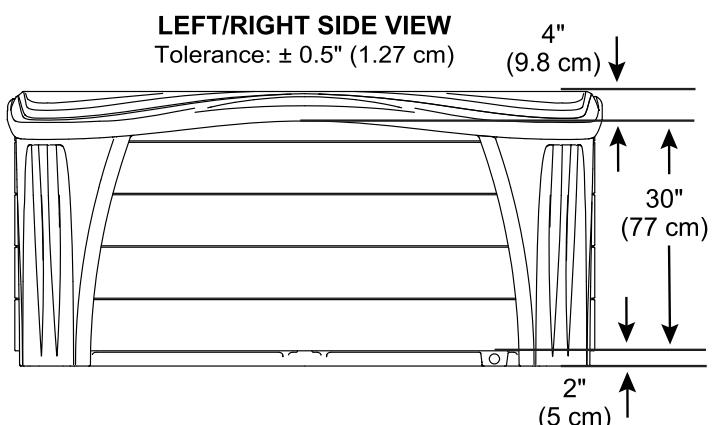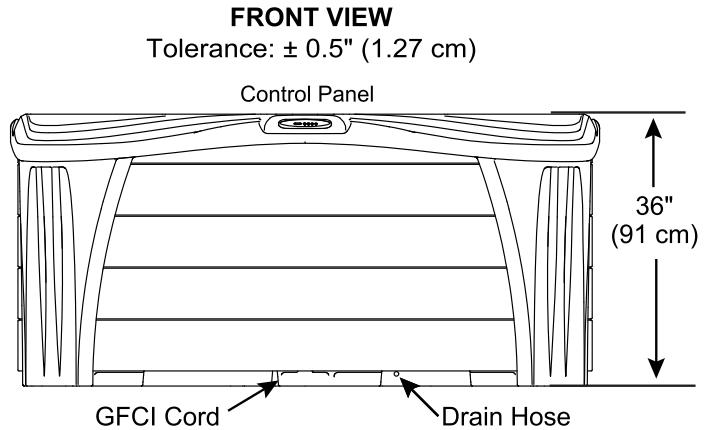

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Echo 30™ Jets


## Specifications

<b>Seating Capacity</b>	7 Adults
<b>Dimensions</b>	78" x 78" x 36" (198 cm x 198 cm x 91 cm);
<b>Dry Weight</b>	414 lbs (187 kg)
<b>Filled Weight (Spa Volume)</b>	4,117 lbs (1,867 kg)
<b>Filled Weight (Average Fill)</b>	3,150 lbs (1,429 kg)
<b>Water Capacity (Spa Volume)</b>	444 US gallons (1,681 Liters)
<b>Water Capacity (Average Fill)</b>	328 US gallons (1,242 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2 kW, 2-Speed
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	30
<b>Seat A Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
<b>Seat B Jets</b>	2 DirectionalMax1 Jets
<b>Seat C Jets</b>	8 DirectionalMax2 Jets
<b>Seat D Jets</b>	6 DirectionalMax2 Jets
<b>Seat E Jets</b>	2 DirectionalMax1 Jets
<b>Seat F Jets</b>	4 DirectionalMax1 Jets, 2 DirectionalMax2 Jets
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor waterfall light; Exterior corner light (white color only)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle and Glacier Sparkle
<b>Headrests</b>	4
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A <b>Export (50 Hz):</b> 220-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; <b>Export (50 Hz):</b> 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
<b>Special Features</b>	N/A



# Echo 30 Jets

## Operation/Seat Depths

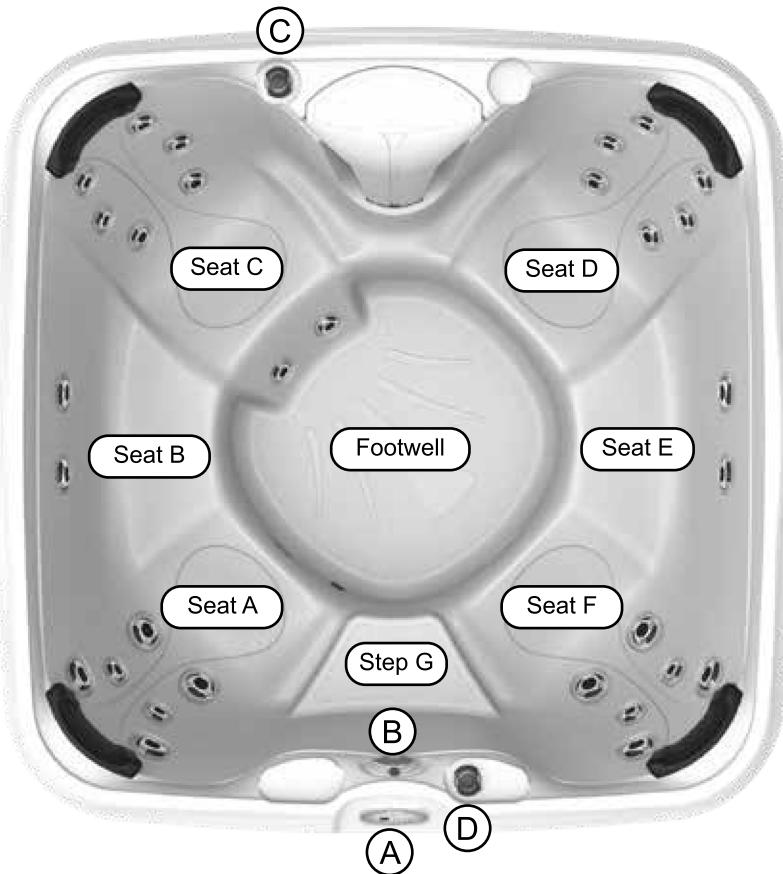

### 30 Total Jets

DirectionalMax1  
Jets (12)

DirectionalMax2  
Jets (18)



Spa Operation Subject to Change without Notice

**A = 26.50" (67.30 cm)**

**B = 24.75" (62.86 cm)**

**C = 28.00" (71.12 cm)**

**D = 28.00" (71.12 cm)**

**E = 24.75" (62.86 cm)**

**F = 26.50" (67.30 cm)**

**G = 20.00" (50.80 cm)**

**H = 34.50" (87.63 cm)**

## Seat Depths

Listed dimensions represent distance from top of spa to lowest point in seat.




Tolerance:  $\pm 0.5"$  (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

# Echo 30 Jets

## Dimensions

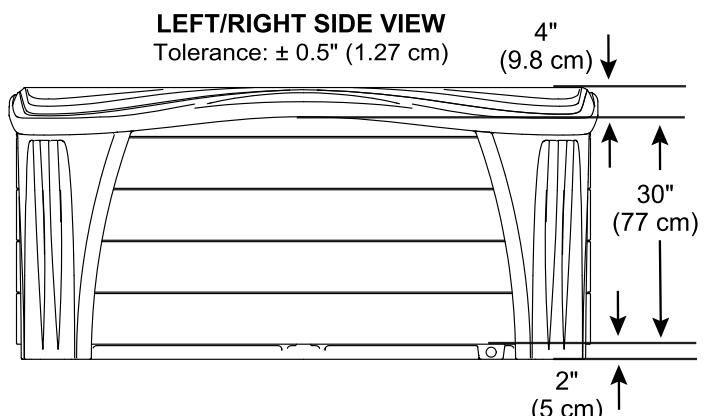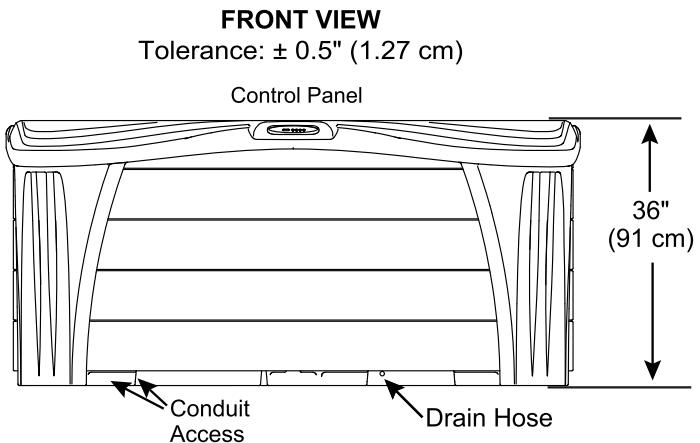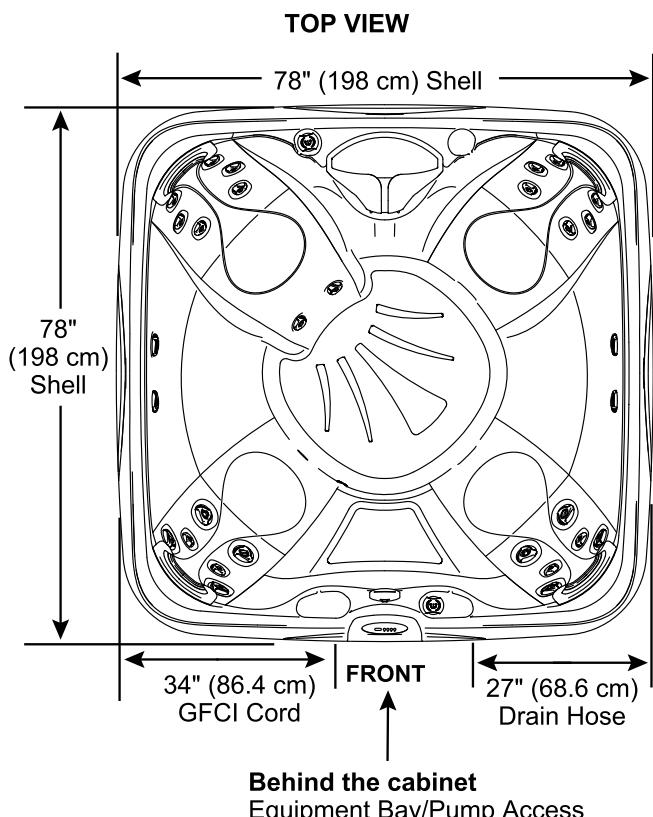

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

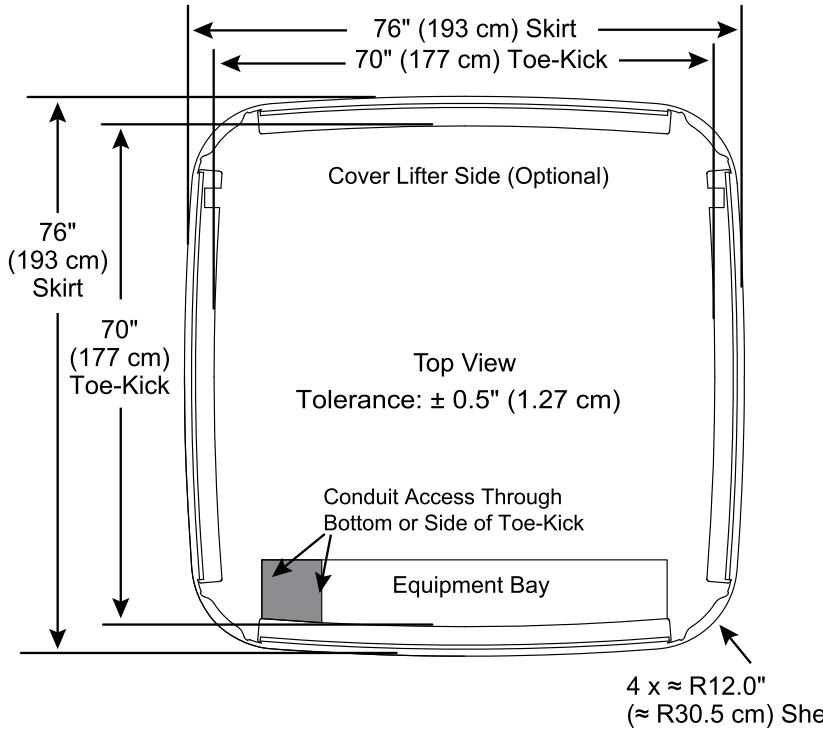

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)

# Mood 20™ Jets


## Specifications

<b>Seating Capacity</b>	5 Adults
<b>Dimensions</b>	78" x 68" x 32" (198 cm x 173 cm x 81 cm);
<b>Dry Weight</b>	285 lbs (129 kg)
<b>Filled Weight (Spa Volume)</b>	3,120 lbs (1,415 kg)
<b>Filled Weight (Average Fill)</b>	2,404 lbs (1,090 kg)
<b>Water Capacity (Spa Volume)</b>	340 US gallons (1,287 Liters)
<b>Water Capacity (Average Fill)</b>	254 US gallons (961 Liters)
<b>Electronic Controls</b>	Digital Touch Controller. Offers customizing of cleaning cycles and water temperature setting.
<b>Pump 1</b>	North America (60 Hz): 2-Speed, 2.0 HPR <b>Export (50 Hz):</b> 2-Speed, 1.5 HPR
<b>Pump 2</b>	N/A <b>Export (50 Hz):</b> N/A
<b>Circulation Pump</b>	N/A
<b>Total Jets</b>	20
<b>Seat A Jets</b>	1 DirectionalMax1, 1 DirectionalMax2
<b>Seat B Jets</b>	2 DirectionalMax1
<b>Seat C Jets</b>	1 DirectionalMax1, 1 DirectionalMax2
<b>Seat D Jets</b>	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
<b>Seat E Jets</b>	2 DirectionalMax1, 2 DirectionalMax2, 2 DirectMiniMax
<b>Footwell (F) Jets</b>	2 DirectionalMax1
<b>Massage Selectors</b>	N/A
<b>Air Controls</b>	2
<b>Water Management System</b>	One Easy Kleen 30 ft <sup>2</sup> filter cartridge; Optional factory installed Ozone <b>Export (50 Hz):</b> Optional factory installed Ozone
<b>LED Lighting</b>	Multicolor Waterfall light; Footwell light, Exterior corner lights (8 qty)
<b>Shell/Cabinet Colors</b>	Mystic Sparkle and Glacier Sparkle
<b>Headrests</b>	2
<b>Waterfalls</b>	One with independent flow rate (on or off) adjustment; powered by pump 1
<b>Heater:</b>	Hi Flow 1.0kW/4kW <b>Export (50 Hz):</b> Hi Flow 3.0kW
<b>Electrical Requirements:</b>	North America (60 Hz): Convertible 120 VAC@15A or 240 VAC@30A, 40A <b>Export (50 Hz):</b> 220-240V@1x16A, 1X32A
<b>Warranty*</b>	North America (60 Hz): 5 Years Shell, 1 Year Plumbing Components, 1 Year Electrical Components, 1 Year Insulating Cover, 1 Year Labor; <b>Export (50 Hz):</b> 5 Years Shell, 2 Years Plumbing Components, 2 Years Electrical Components, 2 Years Insulating Cover, 2 Years Labor;
<b>Special Features</b>	Optional Suite Package Add-On



# Mood 20 Jets

## Operation/Seat Depths

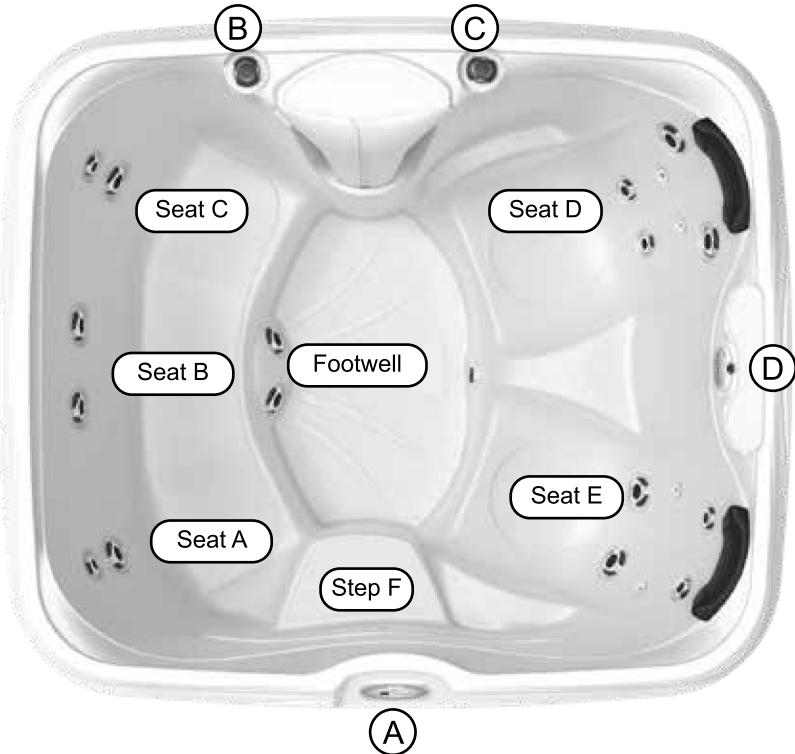

- (A) Topside Control - Activate Jets Pump, Light and Control Water Temperature
- (B) Air Control - Activates Seat A Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Seat B Jets (2 DirectionalMax1 Jets), Seat C Jets (1 DirectionalMax1 Jet, 1 DirectionalMax2 Jet), Footwell Jets (2 DirectionalMax2 Jets)
- (C) Air Control - Activates Seat D Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets), Seat E Jets (2 DirectionalMax1 Jets, 2 DirectionalMax2 Jets, 2 DirectMiniMax Jets)
- (D) Water Feature Control - Controls Water Feature Output.

- Jet Pump 1: All seats and footwell jets

### 20 Total Jets

DirectionalMax1  
Jets (10)

DirectionalMax2  
Jets (6)

DirectMiniMax  
Jets (4)



Spa Operation Subject to Change without Notice

**A = 26.50" (67.31 cm)**

**B = 26.25" (66.68 cm)**

**C = 26.50" (67.31 cm)**

**D = 26.25" (66.68 cm)**

**E = 28.30" (71.87 cm)**

**F = 18.00" (45.72 cm)**

**G = 30.50" (77.47 cm)**

### Seat Depths




Listed dimensions represent distance from top of spa to lowest point in seat.  
Tolerance:  $\pm 0.5"$  (1.27 cm)




Dimensions/Specifications are Subject to Change Without Notice

# Mood 20 Jets

## Dimensions

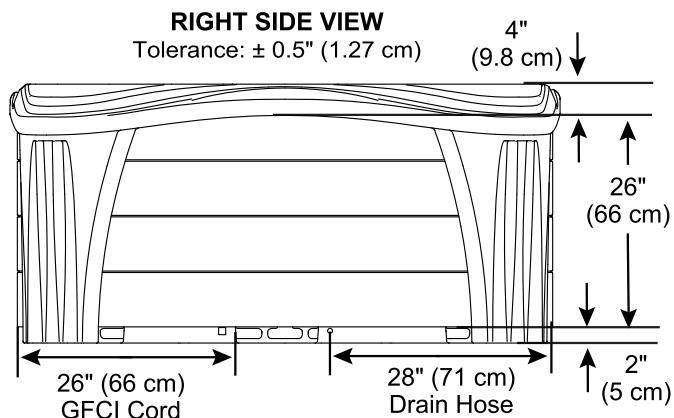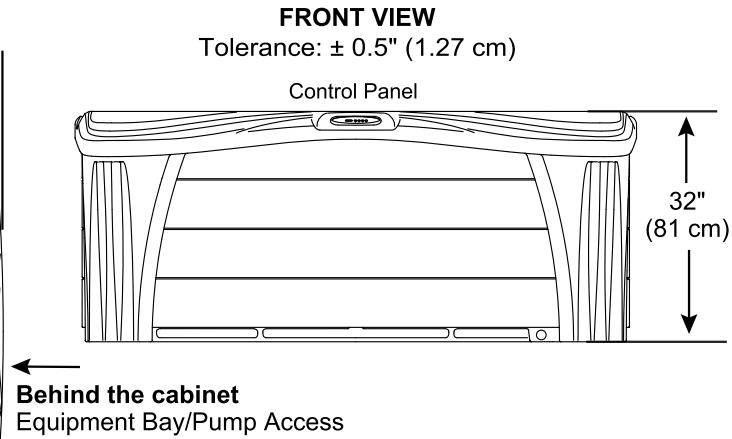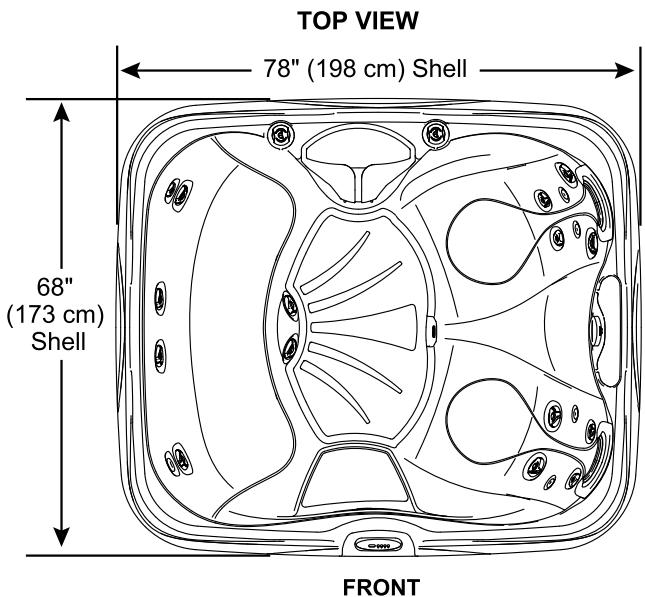

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

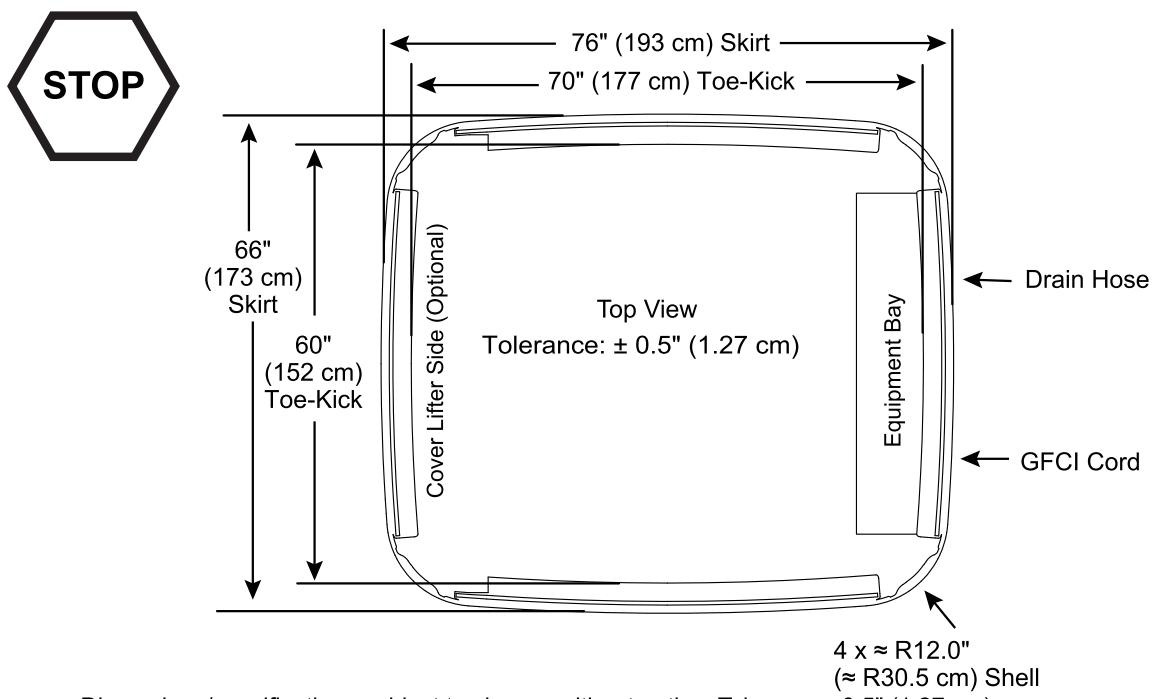

Dimensions/specifications subject to change without notice. Tolerance  $\pm 0.5"$  (1.27 cm)


# Complete Dimensions- J400 Collection Models

Spa Models	DIMENSIONS A-F (All measurements are an approximate $\pm .5"$ )					
	A	B	C	D	E	F
J-495	110" (279.40 cm)					
J-485		91" (231 cm)	74.56" (189.38 cm)			
J-475				37.50" (95.25 cm)	43.50" (110.49 cm)	$\approx 8.0"$ (20.32 cm)
J-445						
J-435	84" (213.5 cm)	84" (213.5 cm)	66.56" (169.06 cm)			
Spa Models	DIMENSIONS G (All measurements are an approximate $\pm .5"$ )					
	G	H (Drain)	CLEARRAY®			
J-495						
J-485						
J-475	$\approx 15.0"$ (38.10 cm)	Front Right	Front Center			
J-445						
J-435						




**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.


**Spa Top View (J-485 Illustrated)**

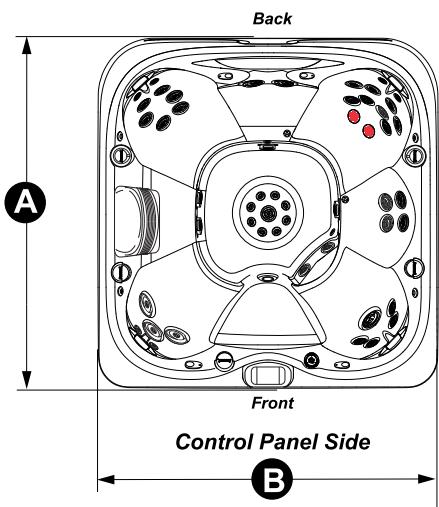


**Control Panel Side View**

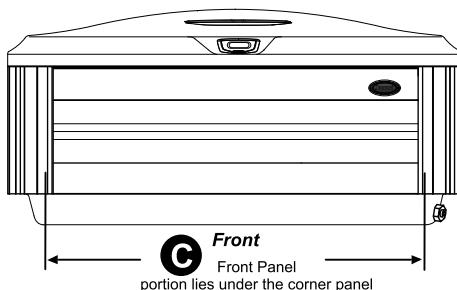

**Spa Bottom View (J-485 Illustrated)**

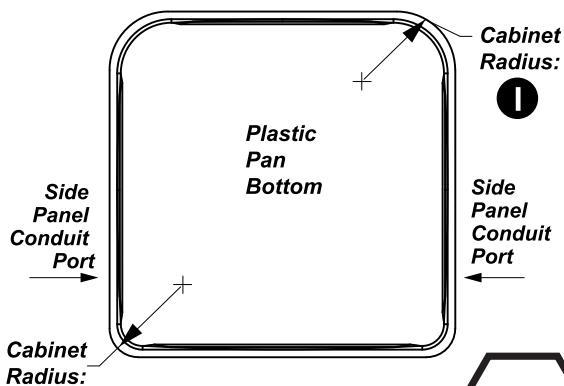

**Side View (J-485 Illustrated)**

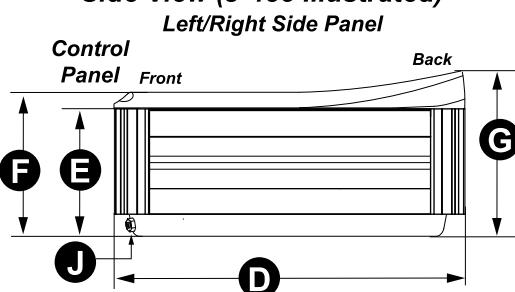

## Important Panel Details

**NOTE:** Over time the panel(s) may bow, this is considered normal. The panels will straighten out when reinstalled into the mounting channel. Place one end of the panel into the channel first then flatten the panel and insert the other end.

**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.



Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

# Complete Dimensions - J-LX Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)						
	A	B	C	D	E	F	
J-LXL	91" (231.0 cm)	91" (231.0 cm)	31.50" (80.0 cm)	34" (86.0 cm)	Front Right	84.25" (214.0 cm)	
J-LX	84.25" (214.0 cm)	DIMENSIONS G-J (All measurements are an approximate)					
G							
J-LXL							
J-LX							




**IMPORTANT!** Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.

- Dimensions Subject to Change Without Notice -


**Spa Top View (J-LXL Illustrated)**

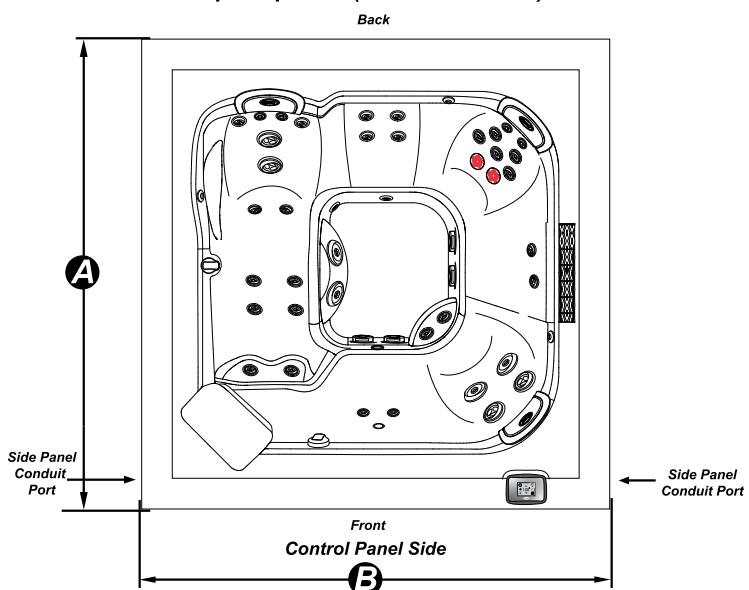


**Control Panel Side View**

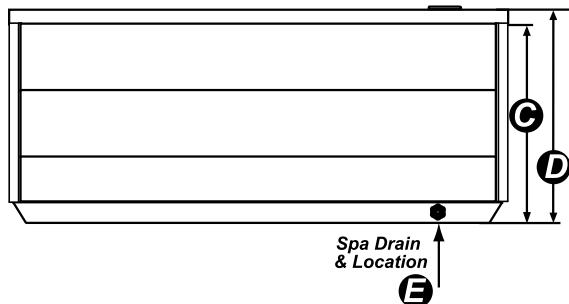

**Front/Rear Side View (All Models)**

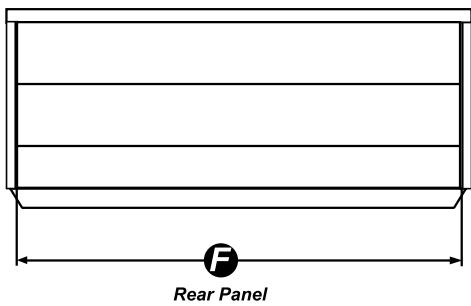

**Left/Right Side View (All Models)**

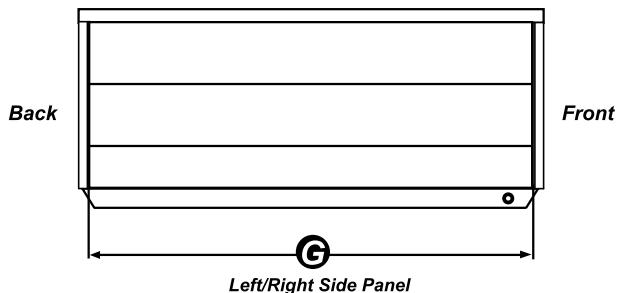


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.

# Complete Dimensions - J300 Collection Models


Spa Models	DIMENSIONS A-F (All measurements are an approximate)					
	A	B	C	D	E	F
J-385	91" (231.1 cm)		66.75" (169.55 cm)			
J-375		91" (231.1 cm)			15.75" (40.01 cm)	32" (81.28 cm)
J-365			66.50" (168.91 cm)			
J-355						
J-345	84" (213.4 cm)	84" (213.4 cm)	60.0" (152.40 cm)		13.5" (34.09 cm)	30.50" (77.47 cm)
J-335						
J-325			52.5" (133.35 cm)		10.75" (27.31 cm)	28" (71.12 cm)
J-315	66" (167.6 cm)	76" (193 cm)	52.0" (132.08 cm)		9.50" (24.13 cm)	26.25" (66.68 cm)
DIMENSIONS G-I (All measurements are an approximate)						
G	H	I	CLEARRAY®	Front Center		IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.
J-385			12" (30.48 cm)			
J-375	37.50" (95.25 cm)	26" (66.04 cm)	29" (73.66 cm)			
J-365						
J-355						
J-345	36" (91.44 cm)	24.50" (62.23 cm)	27" (68.58 cm)			
J-335						
J-325	33.50" (85.09 cm)	21.5" (54.61 cm)	12" (30.48 cm)			
J-315	31.75" (80.65 cm)					

- Dimensions Subject to Change Without Notice -


Spa Top View (J-385 Illustrated)

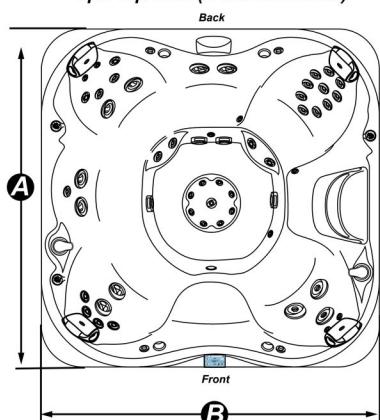


Control Panel Side View (All Models)

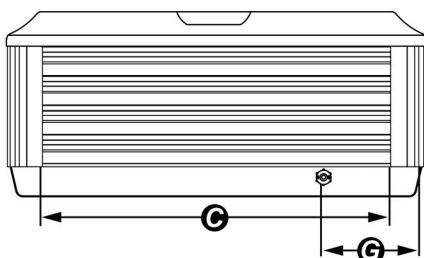

Rear Side View (All Models)

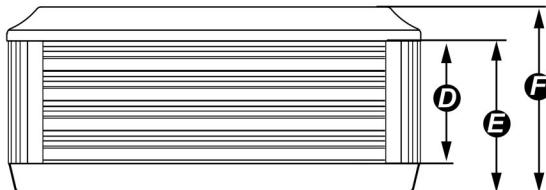

All Models Cabinet Radius:  
≈ 11.0" (27.94 cm),  
4-Corners

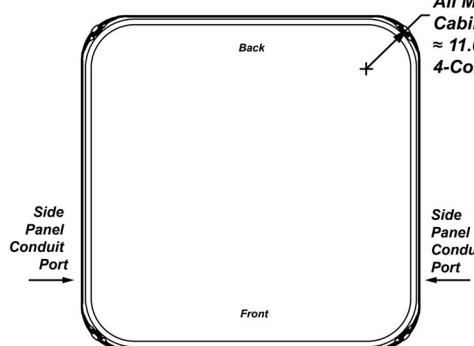


Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.



# Complete Dimensions-All J200 Collection Models

Spa Models	DIMENSIONS A-G (ALL MEASUREMENTS ARE AN APPROXIMATE)						
	A	B	C	D	E	F	G
J-215	69" (175.3 cm)	80" (203.2 cm)	58.88" (149.6 cm)	27" (68.6 cm)	33" (83.8 cm)	TBD	10.0" (25.4 cm)
J-225	80" (203.2 cm)	80" (203.2 cm)	58.88" (149.6 cm)	27" (68.6 cm)	33" (83.8 cm)	58.88" (149.6 cm)	10.0" (25.4 cm)
J-235	84" (213.4 cm)	84" (213.4 cm)	62.25" (158.1 cm)	30" (76.2 cm)	36.0" (91.4 cm)	62.25" (158.1 cm)	10.0" (25.4 cm)
J-245	84" (213.4 cm)	84" (213.4 cm)	62.25" (158.1 cm)	30" (76.2 cm)	36.0" (91.4 cm)	62.25" (158.1 cm)	10.0" (25.4 cm)
J-275	89" (226.1 cm)	89" (226.1 cm)	69.25" (175.9 cm)	30" (76.2 cm)	36.0" (91.4 cm)	69.25" (175.9 cm)	10.0" (25.4 cm)
J-285	89" (226.1 cm)	89" (226.1 cm)	69.25" (175.9 cm)	30" (76.2 cm)	36.0" (91.4 cm)	69.25" (175.9 cm)	10.0" (25.4 cm)
DIMENSIONS H-I (ALL MEASUREMENTS ARE AN APPROXIMATE)							
H	I	CLEARRAY®	Drain				
J-215	28.5" (72.39 cm)	4.0" (10.16 cm)	Center	Right	IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-225	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-235	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-245	24.0" (60.96 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-275	26.0" (66.04 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
J-285	26.0" (66.04 cm)	4.0" (10.16 cm)			IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundation support and/or decking.		
- Dimensions Subject to Change Without Notice -							

Spa Top View (J-285 Illustrated)

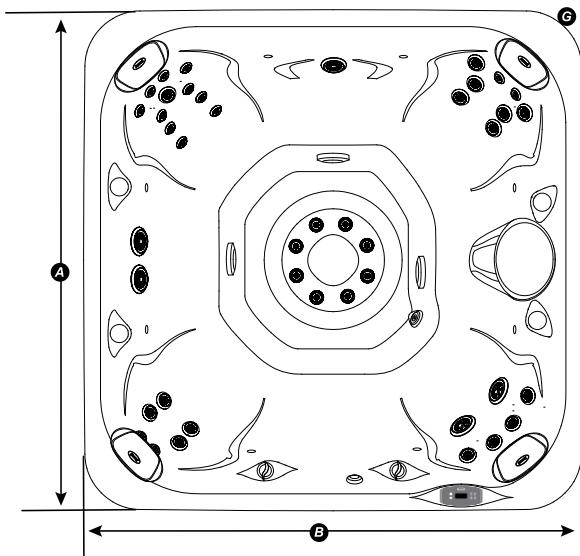

Cabinet Radius:  
≈ 10.0" (25.4 cm),  
4-Corners

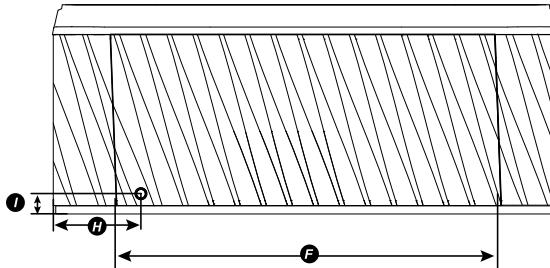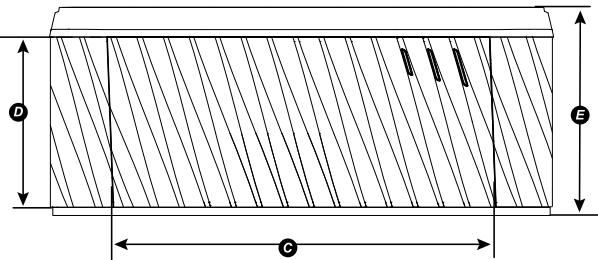

Note: Gaps in underlying wood frame are for ventilation purposes; not for electrical hook-ups or other uses.







Your Jacuzzi Hot Tub Dealer is:

